

EMERGENCY DRENCH SHOWER

PRODUCT CODE S2200

Date: March 2014

Horizontally Mounted Emergency Shower, Stainless Steel Shower Head

Model S2200 is a horizontally mounted emergency shower with a stainless steel shower head and a 1" stay-open ball valve with a pull rod.

Standard Equipment:

Showerhead: Stainless steel, 188 mm diameter showerhead with a 75 litres/minute flow regulator.

Valve: 1" rough chrome plated brass stayopen ball valve. Unit is provided with a stainless steel actuator arm and a 737 mm stainless steel pull rod.

Water Supply: 1" BSP female threaded brass inlet.

Piping: Schedule 40, 1" galvanized steel pipe, yellow powder coated finish.

Universal Sign: ANSI compliant, vertical identification sign.


Weekly Test Tag: A water proof test card to record the date and inspector's name for weekly functional testing of the unit.

Compliances:

Test rating conditions are compliant to ANSI Z358.1-2009



☐ Model S2200 : Horizontally Mounted Emergency Shower, Stainless Steel Showerhead

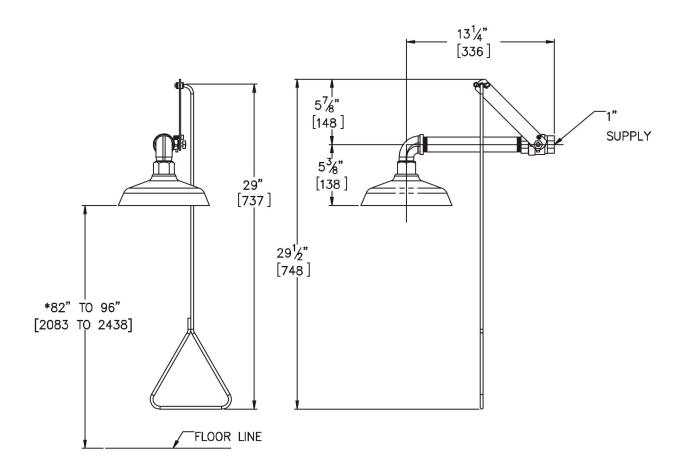

GENERAL NOTES:

- 1. ALL DIMENSIONS ARE IN INCHES [MM].
- *2. ANSI Z358.1 REQUIRES THE SHOWER HEAD TO BE MOUNTED BETWEEN 82"[2083] AND 96"[2438] ABOVE THE FLOOR.



5 Brearley Court Baird Road Waterwells Business Park Quedgeley Gloucester GL2 2AF Tel: 01452 721211 Fax: 01452 721231

www.acornpowell.co.uk