



**Brick faced internal  
wall cladding system**

**I-Clad is a brick faced internal wall cladding system. Developed by Eurobrick specifically for interior applications, with plasterboard based backer panels.**

## Benefits

- Achieve a real brick finish.
- Versatile, fast and simple to install.
- Slimline profile minimises loss of valuable interior space.
- Suitable for commercial and domestic interiors.
- Durable with a life span of at least 30 years.
- Indistinguishable from traditional brick work.
- Wide range of kiln fired clay brick slips available. These include cut slips (Classic Range) and extruded slips (Britannia Range), please refer to our Product Guide for more information. Slips can be cut from other bricks to suit project requirements if the standard selection is not suitable.
- Pointing mortar is available in eight standard colours to complement or contrast with the chosen brick.

## Technical information

- The composite backer panel comprises 12.5mm thick plasterboard with Eurobrick's high impact polystyrene ribbed skin pre-bonded to it. The horizontal ribs align and support the brick slips so that brick courses are formed accurately and easily.
- System includes panels, fixings, adhesive, brick slips and pointing mortar. Ancillary products include corner bricks, and installation tools such as adhesive guns and pointing bags.
- Using the 12.5mm thick backer panel the system provides a slimline profile with a depth starting from 28mm (excluding supporting battens).
- Euro Classification of Reaction to Fire EN13501-1: 2018; Class B1-s1, d0


## Small projects and fireplaces

- For small areas or fireplaces and inglenooks, cement based adhesive and brick slip spacers can be supplied as an alternative fixing method to using the panel systems.

## Installation

The plasterboard backer panel can be fixed to timber or light gauge steel studs (please see diagram for required positioning of the studs) or existing plywood or plasterboard surfaces.

Required positions of support battens behind backer panel

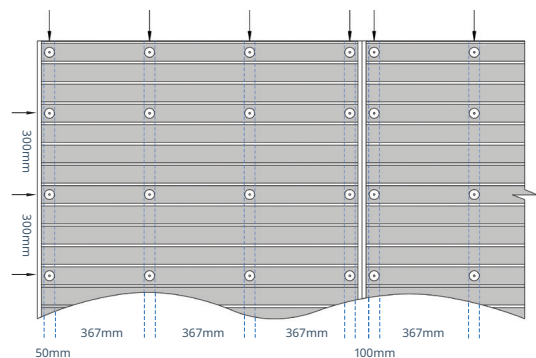

NB. Additional detail diagrams are available on our website or please refer to our Installation Instructions. Please note that Eurobrick cladding systems must be installed in accordance with the Installation Instructions.



1. The ribbed backing panel is fixed to the substrate. (Fixings vary according to substrate.)



2. Brick slips are attached with permanent bonding adhesive.



3. Specially formulated mortar is then piped into the brick joints.



4. Mortar is tooled in the manner of traditional pointing.



For technical queries or further advice on ordering please call  
**+44 (0)117 971 7117**



For more information please visit our website at  
**www.eurobrick.co.uk**