

## Globe Valves Range

## Conex Banninger Globe Valves

Conex Banninger Globe Valves are used to stop, open or throttle the flow of the fluid in the system.

Globe Valves enable proportional control (flow characteristics) as the relationship between flow rate and the extent of valve lift is linear. Conex Banninger offers two basic seat and disc configurations, as follows:

- Renewable Composition or Soft Seat (Series 1130)
- Metal to Metal Seat (Series 1131)

Soft seated valves are recommended when the valve is to be used with gasses to ensure a complete shut-off to be achieved. Flow direction should normally be with the pressure under the seat.

Conex Banninger Globe Valves are manufactured in accordance with EN 5154:1991 Series B, PN32.

### Application and uses

Globe Valves are used for applications requiring throttling and frequent operation. For example, Globe Valves may be used as sampling valves, which are normally shut except when liquid samples are being taken. Since the baffle restricts flow, they are not recommended where full, unobstructed flow is required.

### Valve materials

Conex Banninger Globe Valves are manufactured from bronze and are suitable for a broad range of applications as they are classed as immune to dezincification, stress corrosion cracking and are highly corrosion resistant. Stress corrosion cracking occurs occasionally in brass valves where high levels of stress in the component are combined with a corrosive environment causing cracks to form and grow. Common corrosive environments for brass are items that contain ammonia, or ammoniacal compounds. These can be found in cleaning fluids, refrigeration gases, sewage waste products, building materials and insulating materials.

For further information refer to Stress Corrosion Cracking at [www.conexbanninger.com/standards](http://www.conexbanninger.com/standards)

### Quality assurance

Conex Universal Ltd is an ISO 9001 Quality Assured company and is registered with the BSI.

### 5-year warranty

When professionally fitted and in accordance with the installation instructions, Conex Banninger Valves are guaranteed against manufacturing defects for five years from first purchase date. Any alleged defects must be reported to Conex Universal Ltd within one month of the first occurrence, clearly setting out the nature of the claim. The warranty is limited to the repair and replacement of defective fittings at the discretion of Conex Universal Ltd and the company reserves the right to inspect and test the alleged defects. This warranty provided by Conex Universal Ltd does not affect your statutory rights. For more information visit [www.conexbanninger.com](http://www.conexbanninger.com).

### General information

Performance data, including pressure-temperature ratings, has been developed from published standards, supplier material specifications, design calculations and in-house testing. It covers typical applications for the Conex Banninger Valve product range and is provided as a general guideline.

For specific applications, users are advised to contact Conex Universal Ltd for technical advice, or to complete their own evaluation to prove technical suitability of the products. Failure to follow this may result in damage and personal injury for which Conex Universal cannot be held liable.



# Contents

1130 Globe Valve - Resilient Seat - PN32 - (Bronze).....

1

1131 Globe Valve - Metal to Metal Seat - PN32 - (Bronze) .....

3

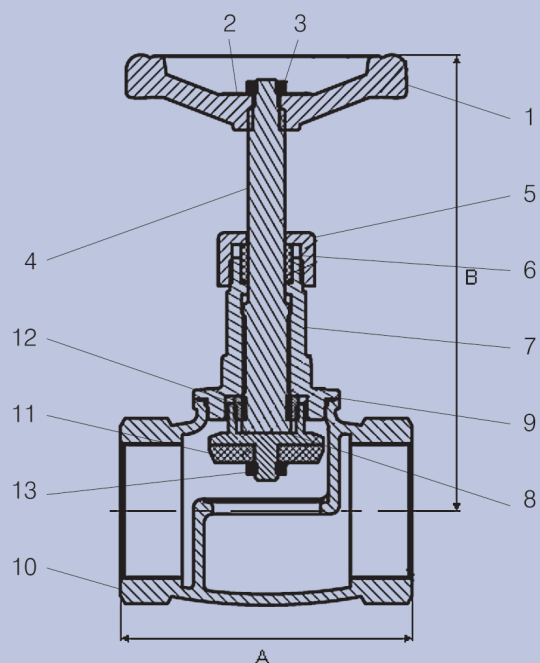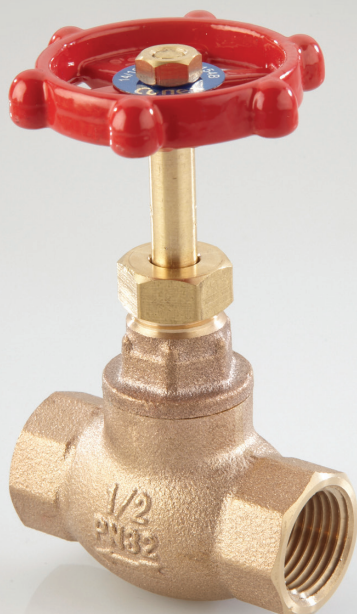

## Valve range

1130 Globe Valve - Resilient Seat - PN32 - (Bronze)

### Material specification

Handwheel Version: 1130 - 1/2" - 4"

No	Component	Material	Specification
1	Handwheel	Aluminium	EN 1706 LM6
2	Rating Disc	Aluminium	EN 1706 LM6
3	Handwheel Nut	Brass	EN 12164CW614N
4	Stem	Bronze	EN 1982 CC491K
5	Packing Nut	Brass	EN 12165 CW617N-DW
6	Packing	PTFE	PTFE
7	Bonnet	Bronze	EN 1982 CC491K
8	Core	DZR Brass	EN 12164 CW602N
9	Bonnet Washer	Brass	EN 12165 CW617N-DW
10	Body	Bronze	EN 1982 CC491K
11	Seat	PTFE	PTFE
12	Core retention Nut	Brass	EN 12165 CW617N-DW
13	Seat Nut	Brass	EN 12165 CW617N-DW

### Features and benefits:

- WRAS approved for drinking water systems.
- Provides accurate regulation and control of flow.
- Rising stem design.
- High quality bronze construction.
- Robust and compact design.
- End connections, female taper threads to EN 10226-2 (ISO 7-1).
- Suitable for use with low temperature hot water and chilled systems.
- Sizes 1 1/4 and above are CE marked – Category 1.

### Globe Valve - 1130

Handwheel Order Code BS EN 10226-2 (ISO 7-1) thread	Size	DN	A	B	Kv Value	Weight (kg)
113020RRW320404	1/2"	15	60	95	2.9	0.30
113020RRW320606	3/4"	20	65	100	-	0.54
113020RRW320808	1"	25	80	115	12	0.84
113020RRW321010	1 1/4"	32	90	135	-	1.36
113020RRW321212	1 1/2"	40	100	155	-	1.76
113020RRW321616	2"	50	120	174	72	2.97
113020RRW322020*	2 1/2"	65	145	-	-	4.14
113020RRW322424*	3"	80	200	-	-	5.68
113020RRW323232*	4"	100	-	-	-	-

\*Valves available to special order.

### Valve suitability

Product	Steam	Water	Drinking Water	Oil	Air* (Oil Free)	Gas* (Inert)	Gas* (Combustible)	Gas* (Corrosive)	Gas (Oxygen)
1130	x	✓	✓	✓	✓	✓	✓	✓	x

\* Limited to 10 bar.

### Max. working parameters

1130	Temperature °C	Pressure bar	Pressure psi
Water	-10 to + 100	32	460
Gas	-10 to +60	5	70

### Gas family application guide

Class 1: Inert – Air, Argon, Helium, Nitrogen and Carbon Dioxide

Class 2: Combustible – Hydrogen, Methane and Natural Gas

Class 3: Corrosive - Sulphur Dioxide

Class 4: Oxygen

### Specification Clauses:

Manufactured in accordance with EN 5154: 1991 Series B, PN32.

Design incorporates a replaceable resilient seat disc retained on the stem by a nut.


Body seat is integral to the body.


Handwheel operated.

End connections, female taper threads to EN 10226-2 (ISO 7-1).

WRAS approved for drinking water systems.

Suitable for low temperature hot water and chilled systems.

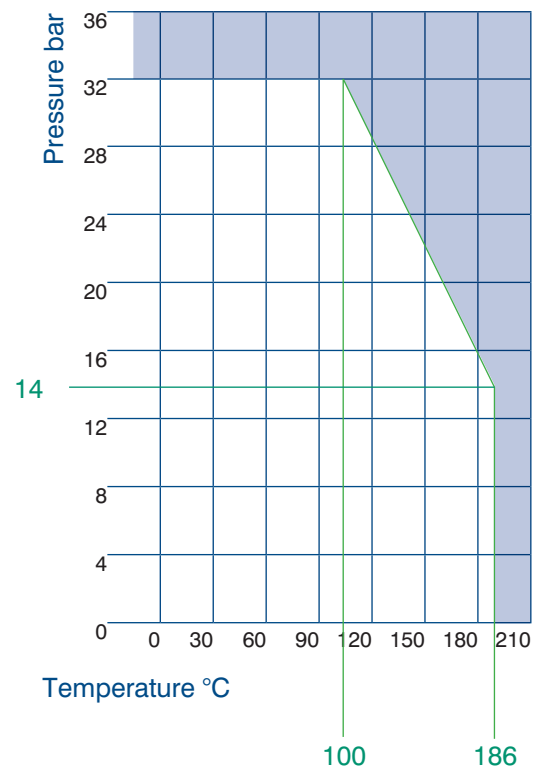

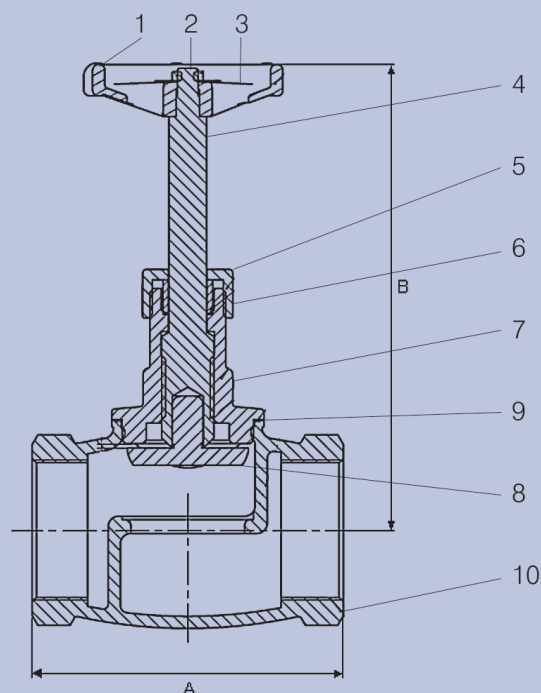

## Valve range

1131 Globe Valve - Metal to Metal Seat - PN32 - (Bronze)

### Material specification

Handwheel Version: 1131 - 1/2" - 4"

No	Component	Material	Specification
1	Handwheel	Aluminium	EN 1706 LM6
2	Rating Disc	Aluminium	EN 1706 LM6
3	Handwheel Nut	Brass	EN 12165 CW614N
4	Stem	Bronze	EN 1982 CC491K
5	Packing Nut	Bronze	EN 12165 CW617N-DW
6	Packing	PTFE	PTFE
7	Bonnet	Bronze	EN 1982 CC491K
8	Core	DZR Brass	EN 12164 CW602N
9	Bonnet Washer	PTFE	PTFE
10	Body	Bronze	EN 1982 CC491K

Features and benefits:

- Designed in accordance with EN 5154.
- WRAS approved for drinking water systems.
- Provides accurate regulation and control of flow.
- Rising stem design.
- High quality bronze construction.
- Robust and compact design.
- End connections, female taper threads to EN 10226-2 (ISO 7-1).
- Approved for drinking water applications.
- Suitable for use with low temperature hot water and chilled systems.

Globe Valve - 1131						
Handwheel Order Code BS EN 10226-2 (ISO 7-1) thread	Size	DN	A	B	Kv Value	Weight (kg)
113120RRW320404	1/2"	15	60	95	2.9	0.31
113120RRW320606	3/4"	20	65	100	-	0.54
113120RRW320808	1"	25	80	115	12	0.84
113120RRW321010	1 1/4"	32	90	135	-	1.36
113120RRW321212	1 1/2"	40	100	155	-	1.76
113120RRW321616	2"	50	120	174	72	2.62
113120RRW322020*	2 1/2"	65	145	-	-	4.14
113120RRW322424*	3"	80	200	-	-	5.68
113120RRW323232*	4"	100	-	-	-	-

\*Valves available to special order.


Valve suitability									
Product	Steam	Water	Drinking Water	Oil	Air (Oil Free)	Gas (Inert)	Gas (Combustible)	Gas (Corrosive)	Gas (Oxygen)
1131	x	✓	✓	✓	✓	x	x	x	x

Max. working parameters			
1131	Temperature °C	Pressure bar	Pressure psi
Water	-10 to +100	32	460

This valve is not suitable for gas applications.

Specification clauses:

- Manufactured in accordance with EN 5154: 1991 Series B, PN32.
- Design incorporates a metal seat disc retained on the stem.
- Body seat is integral to the body.
- Handwheel operated.
- End connections, female taper threads to EN 10226-2 (ISO 7-1).
- WRAS approved for drinking water systems.
- Suitable for low temperature hot water and chilled systems.

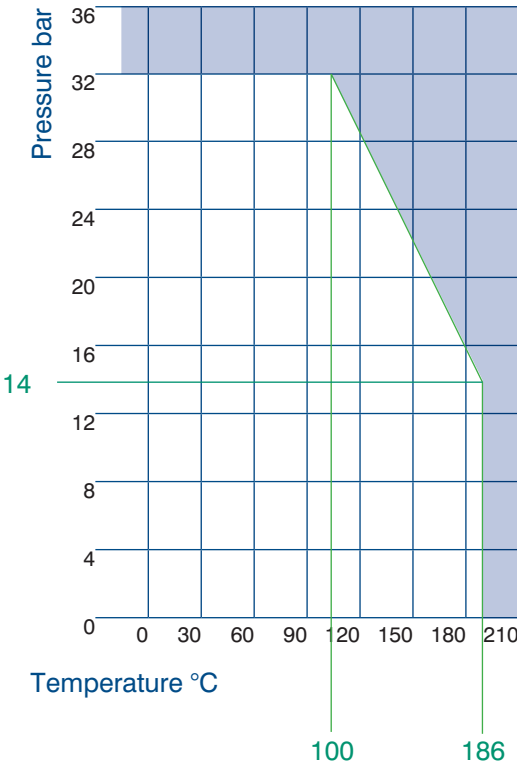



# Conex | Bänninger



Conex   Bänninger <b>Conex Compression</b>	Conex   Bänninger <b>&gt;B&lt; Press</b>	Conex   Bänninger <b>&gt;B&lt; Press Carbon</b>	Conex   Bänninger <b>Push-Fit</b>	Conex   Bänninger <b>&gt;B&lt; Oyster</b>	Conex   Bänninger <b>Series 3000</b>
Conex   Bänninger <b>Triflow Solder Ring</b>	Conex   Bänninger <b>&gt;B&lt; Press Gas</b>	Conex   Bänninger <b>&gt;B&lt; Press Inox</b>	Conex   Bänninger <b>Cuprofit</b>	Conex   Bänninger <b>Medical Gas</b>	Conex   Bänninger <b>Series 8000</b>
Conex   Bänninger <b>Delcop End Feed</b>	Conex   Bänninger <b>&gt;B&lt; Press Solar</b>	Conex   Bänninger <b>&gt;B&lt; Flex</b>	Conex   Bänninger <b>K65®</b>	Conex   Bänninger <b>OEM</b>	Conex   Bänninger <b>Series 8000 M</b>
Conex   Bänninger <b>Delbraze</b>	Conex   Bänninger <b>&gt;B&lt; Press XL</b>	Conex   Bänninger <b>&gt;B&lt; Push</b>	Conex   Bänninger <b>Valves</b>	Conex   Bänninger <b>&gt;B&lt; ACR</b>	



United Kingdom  
Conex Universal Limited

Germany  
IBP GmbH

Tel: +44 (0)121 557 2831 | Fax: +44 (0)121 557 0185 | Email: [salesuk@ibpgroup.com](mailto:salesuk@ibpgroup.com) | Website: [www.conexbanninger.com](http://www.conexbanninger.com)

Spain/France  
IBP Atcosa SL

Italy  
IBP Banninger Italia srl

Poland Sales, Marketing and Logistics  
IBP Instalittings Sp z o.o.

China  
IBP China

The content of this publication is for general information only. It is the user's responsibility to determine suitability of any product for the purpose intended and reference should be made to our Technical Department if clarification is required. In the interests of technical development we reserve the right to change specification, design and materials without notice.

Conex Bänninger products are approved by numerous Standards Authorities and Certification Bodies. For more details on this product range, please email our technical team at: [technical@ibpgroup.com](mailto:technical@ibpgroup.com). IBP trademarks are registered in numerous countries.