THE CLARK-DRAIN B125 SQUARE TO ROUND COVER



ON DRIVEWAYS AND FOOTPATHS THE CHOICE OF MANHOLE COVER CAN HAVE A SIGNIFICANT IMPACT ON HOUSE BUILDING MAINTENANCE CYCLES AND REPLACEMENT COSTS.

In recent years loads have risen as cars have continued to increase in weight and size. What may have been installed originally to take a driveway loading may not be sufficient to avoid a manhole cover becoming bowed, cracked or broken.

The CD 761SR KMB+R, capable of bearing a B125 (12.5T) load provides the answer for tarmac areas in driveways and footpaths especially where cars, MPVs and 4x4s may be driven and a 450mm diameter clear opening is required.

CALL DIRECT 01733 765317 SALES@CLARK-DRAIN.COM

In addition, for chamber depths more than I.2m, the CD 761SR KMB+R is supplied with a reducer to convert the clear opening to 350mm in accordance with Building Regulations Part H.

KM 98709



clark-drain.com

B125 SQUARE TO ROUND COVER

For footpath and driveway applications

- BSI Kitemark Certified to BS EN124:1994
- B125 (12.5 tonnes) load rating classification
- Suitable for slow moving driveway traffic
- Ideal for tarmac areas in driveways and footpaths




Manual handling

 Keyholes to suit CD 553 and CD 556 lifting keys (available separately)

Dual locking

- Standard locking bolts secures cover to frame
- 3 vertical lugs secure the frame to the chamber wall

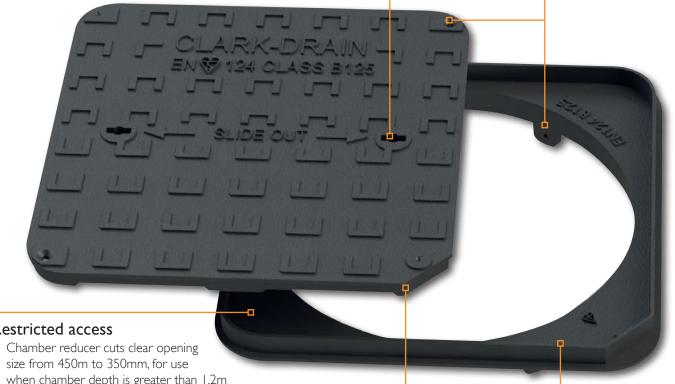

Restricted access

- size from 450m to 350mm, for use when chamber depth is greater than 1.2m
- Clear opening reducer lessens risk of entrapment as set out in Part H of the Building Regulations



Ease of use

• Unique corner design ensures correct orientation of cover to fit frame

Compatibility

 Circular opening in frame fits the Clark-Drain 450 series chambers.

	Clear Opening		Overall Size	Frame Depth	Overall weight
Product Code	(mm)	Loading class	(mm)	(mm)	(Kg)
CD 761SR KMB+R	450 × 450	B125	507 × 507	30	22

Options: Skid resistant coating High security bolts

CALL DIRECT 01733 765317 SALES@CLARK-DRAIN.COM

