MASONITE®

DOORS THAT DO MORE™



PRODUCT GUIDE 2025

Masonite in the UK has brought together a collection of industry-leading manufacturers to offer an inspirational range of internal and external doors and doorset solutions that will help you define the contemporary spaces of today and tomorrow. Whether you're looking for latest trends, the most practical fittings or the most realistic price point, with Masonite there is no compromise.

MASONITE®
DOORS THAT DO MORE™

It's not just a door.
It's a first impression.
It's a key piece of furniture.
It's a connection to the world.

Inspiring designs made by experienced manufacturers.

That's why at Masonite we make life and living better by designing and producing doors that address human needs for comfort, safety, security and convenience.

About Us 7

New Arrivals Worth a Second Look
+ Stocking Policy 13

Product Ranges 5
+ Portfolio Premium Veneer 14
+ Premdor Standard Veneer 20
+ Premdor Moulded 26
+ Premdor Moulded Glazed 40
+ Premdor Paint Grade 48
+ Premdor External Flush 53
+ Premdor Glazed Fire Doors 54

Internal Doorsets | Premdor 62

External Doorsets 90

French and Folding Doorsets 106

Technical Information 114



MASONITE

Product Ranges

Masonite in the UK offer a wide range of products for every application designed with your needs in mind.

Use this quick reference guide to browse our product categories to help you find the right product solution to get your project started.

Portfolio Premium Veneer



P16 P16 P16 P17 P17 P18 P18 P18 P19 P19

Premdor Standard Veneer



P22 P22 P22 P23 P24 P24 P24


Premdor Moulded



P29 P29 P30 P30 P31 P33 P34 P34 P35 & 36 P37 P38 & P39

Premdor Moulded Glazed

Go to the relevant page to discover the full range

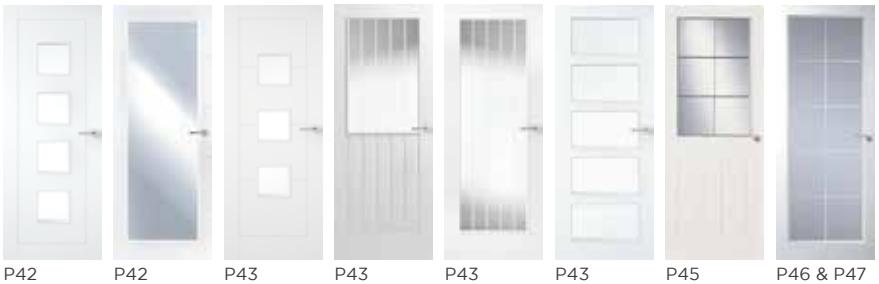

P42 P42 P43 P43 P43 P43 P45 P46 & P47

Premdor Paint Grade



P51 P52

Premdor External Flush



P53 P53 P53

Premdor Glazed Fire Doors



P58 & 59 P60 P61

Stocking Policy

Green Tint Flashed items are available from stock on a 3 day lead-time from key order date, terms and conditions apply, see page 123 for further details.





Innovation and Experience

Spanning over 90 years, our heritage in design and manufacturing gives us the skill and expertise we need to explore new ways of working in the commercial, residential and leisure sectors.
By showcasing the latest production innovations whilst maintaining our reputation for service and delivery excellence, we can continue to shape and lead the manufacturing industry.

The Masonite UK Family

We've brought the industry expertise of leading manufacturers under one roof.

Internal Doors

Premdor®
Doors

Portfolio
Premium Veneer Doors

Premdor Doorsets
Internal & Apartment Entrance Doorsets

External Doors

Door-Stop International®
Composite Doorsets

Solidor®
Composite Doorsets

Defining Doors

Doors are one of the prime design elements in a home, office or commercial building.



PORTFOLIO PREMIUM VENEER
P14

PREMDOR STANDARD VENEER
P20

PREMDOR MOULDED
P26

Our doors offer the versatility and high-quality finish you'd expect from a market-leading brand. Veneered, moulded, glazed or pre-hung doorsets ready to express your individual style.



PREMDOR MOULDED GLAZED

P40

PREMDOR PAINT GRADE DOORS

P48





Restyling your interior? The first step is research.

With so many inspiring interiors out there along with masses of information on the latest styles and trends, what once was an exciting prospect can quickly transform into a daunting task.

That's where we can help.

With no plan and products, there's no progress. Offering instant access to interior design expertise, Masonite provides the guidance you need to explore your way through each trend.

Get the latest trend insights in the form of blogs, videos and carefully curated images. Most importantly, find out how you can 'get the look' and apply it to your space with exclusive access to featured products and how to buy. With every month unlocking additional assets for each trend launched throughout the year, we will help you to bring inspiration home.

P 33



Introducing the brand-new Vertical 5 Panel Smooth Moulded Door, offering a classic design with a smooth, contemporary twist.

Vertical 5 Panel Smooth

P 70



Give your internal doorsets the ultimate finishing touch with Premdor's new Art Deco architrave! Measuring 69mm wide and 22mm thick, this stunning addition is available across all our internal SpeedSet Doorsets.

Art Deco Architrave

P 29



2 & 3 Panel Shallow Moulded Smooth

P 76&82



White Primed Frames now as standard on FD30 SoundSecure and FD30 Integral Garage Doorsets.

Coming Soon, White Primed Frames on FD60 SoundSecure and FD60 Communal Doorsets - Watch this space!

Providing the benefit of a versatile and customisable surface

P 80



SoundSecure
FAST TRACK

15 days lead-time on selected SoundSecure FD30 Doorsets.

15 DAYS

7 DOOR STYLES

3 DOOR SIZES

Scan the following QR code to view the offer or refer to page 80

PREMDOR®

Part of the Masonite Group

100s OF DOORS

NOW IN STOCK

FOR *FAST* DELIVERY



OVER 180
PRODUCT SKU'S
NOW STOCKED

DELIVERED WITHIN
3 DAYS*

IN STOCK
LOOK OUT FOR THE GREEN TINTED PRODUCT CODES

**Green Tint Flashed items are available from stock on a 3 day lead-time from key order date.*
This lead-time may vary subject to quantity of doors ordered and available stock at time of ordering.


WOMEN



Portfolio
Premium Veneer

Portfolio is a range of interior doors made with the idea of ‘more’ in mind. With veneers hand-crafted in Italy and finished doors manufactured in the UK, Portfolio doors are designed to bring more original ideas, more personality as well as more innovative tones, textures and moods to interior spaces.

Durador Vertical



Oak Vertical



Oak 2 Stile



Standard Core

Door Size	Durador Vertical Code	Oak Vertical Code	Oak 2 Stile Code
926 x 2040 x 40mm Standard Metric	71129	-	-
826 x 2040 x 40mm Standard Metric	71138	-	-
726 x 2040 x 40mm Standard Metric	71137	-	-
626 x 2040 x 40mm Standard Metric	71136	-	-
526 x 2040 x 40mm Standard Metric	71135	-	-
426 x 2040 x 40mm Standard Metric	71134	-	-
864 x 1981 x 35mm (2'10" x 6'6")	71177	-	-
838 x 1981 x 35mm (2'9" x 6'6")	71114	-	-
813 x 2032 x 35mm (2'8" x 6'8")	71139	-	-
762 x 1981 x 35mm (2'6" x 6'6")	71111	-	-
711 x 1981 x 35mm (2'4" x 6'6")	71115	-	-
686 x 1981 x 35mm (2'3" x 6'6")	71116	-	-
610 x 1981 x 35mm (2'0" x 6'6")	71117	-	-
533 x 1981 x 35mm (1'9" x 6'6")	71118	-	-
457 x 1981 x 35mm (1'6" x 6'6")	71119	-	-

Solid Core

Door Size	Code	Code	Code
926 x 2040 x 40mm Standard Metric	-	58629	32629
826 x 2040 x 40mm Standard Metric	-	58638	32638
726 x 2040 x 40mm Standard Metric	-	58637	32637
626 x 2040 x 40mm Standard Metric	-	58636	32636
526 x 2040 x 40mm Standard Metric	-	58635	-
426 x 2040 x 40mm Standard Metric	-	58634	-
864 x 1981 x 35mm (2'10" x 6'6")	-	58677	32677
838 x 1981 x 35mm (2'9" x 6'6")	-	58614	32614
813 x 2032 x 35mm (2'8" x 6'8")	-	58669	32639
762 x 1981 x 35mm (2'6" x 6'6")	-	58611	31611
711 x 1981 x 35mm (2'4" x 6'6")	-	58662	-
686 x 1981 x 35mm (2'3" x 6'6")	-	58616	32616
610 x 1981 x 35mm (2'0" x 6'6")	-	58617	32617
533 x 1981 x 35mm (1'9" x 6'6")	-	58618	-
457 x 1981 x 35mm (1'6" x 6'6")	-	58619	-

FD30 Fireshield

Door Size	Code	Code	Code
926 x 2040 x 44mm Standard Metric	71229	58029	32729
826 x 2040 x 44mm Standard Metric	71238	58038	32738
726 x 2040 x 44mm Standard Metric	71237	58037	32737
626 x 2040 x 44mm Standard Metric	71236	58036	32736
526 x 2040 x 44mm Standard Metric	71235	58035	-
426 x 2040 x 44mm Standard Metric	71234	58034	-
914 x 1981 x 44mm (3'0" x 6'6")	71278	58078	-
864 x 1981 x 44mm (2'10" x 6'6")	71277	58077	32777
838 x 1981 x 44mm (2'9" x 6'6")	71214	58014	32714
813 x 2032 x 44mm (2'8" x 6'8")	71239	58069	32739
762 x 1981 x 44mm (2'6" x 6'6")	71211	58011	22611
711 x 1981 x 44mm (2'4" x 6'6")	71215	58062	-
686 x 1981 x 44mm (2'3" x 6'6")	71216	58016	32716
610 x 1981 x 44mm (2'0" x 6'6")	71217	58017	32717
533 x 1981 x 44mm (1'9" x 6'6")	71218	58018	-
457 x 1981 x 44mm (1'6" x 6'6")	71219	58019	-

FD60 Firemaster

Door Size	Code	Code	Code
926 x 2040 x 54mm Standard Metric	71329	61329	32829
826 x 2040 x 54mm Standard Metric	71338	61338	32838
726 x 2040 x 54mm Standard Metric	71337	61337	32837
626 x 2040 x 54mm Standard Metric	71336	61336	32836
838 x 1981 x 54mm (2'9" x 6'6")	71314	61314	32814
813 x 2032 x 54mm (2'8" x 6'8")	71339	61369	32839
762 x 1981 x 54mm (2'6" x 6'6")	71311	61311	32811
686 x 1981 x 54mm (2'3" x 6'6")	71316	61316	32816

Walnut Vertical



Walnut 2 Stile



Solid Core

Door Size	Walnut Vertical Code	Walnut 2 Stile Code
926 x 2040 x 40mm Standard Metric	62529	33229
826 x 2040 x 40mm Standard Metric	62538	33238
726 x 2040 x 40mm Standard Metric	62537	33237
626 x 2040 x 40mm Standard Metric	62536	33236
526 x 2040 x 40mm Standard Metric	62535	-
426 x 2040 x 40mm Standard Metric	62534	-
864 x 1981 x 35mm (2'10" x 6'6")	62577	33277
838 x 1981 x 35mm (2'9" x 6'6")	62514	33214
813 x 2032 x 35mm (2'8" x 6'8")	62569	33239
762 x 1981 x 35mm (2'6" x 6'6")	62511	33211
711 x 1981 x 35mm (2'4" x 6'6")	62562	-
686 x 1981 x 35mm (2'3" x 6'6")	62516	33216
610 x 1981 x 35mm (2'0" x 6'6")	62517	33217
533 x 1981 x 35mm (1'9" x 6'6")	62518	-
457 x 1981 x 35mm (1'6" x 6'6")	62519	-

FD30 Fireshield

Door Size	Code	Code
926 x 2040 x 44mm Standard Metric	62629	34829
826 x 2040 x 44mm Standard Metric	62638	34838
726 x 2040 x 44mm Standard Metric	62637	34837
626 x 2040 x 44mm Standard Metric	62636	34836
526 x 2040 x 44mm Standard Metric	62635	-
426 x 2040 x 44mm Standard Metric	62634	-
914 x 1981 x 44mm (3'0" x 6'6")	62678	-
864 x 1981 x 44mm (2'10" x 6'6")	62677	34877
838 x 1981 x 44mm (2'9" x 6'6")	62614	34814
813 x 2032 x 44mm (2'8" x 6'8")	62669	34839
762 x 1981 x 44mm (2'6" x 6'6")	62611	34811
711 x 1981 x 44mm (2'4" x 6'6")	62662	-
686 x 1981 x 44mm (2'3" x 6'6")	62616	34816
610 x 1981 x 44mm (2'0" x 6'6")	62617	34817
533 x 1981 x 44mm (1'9" x 6'6")	62618	-
457 x 1981 x 44mm (1'6" x 6'6")	62619	-

FD60 Firemaster

Door Size	Code	Code
926 x 2040 x 54mm Standard Metric	64029	39529
826 x 2040 x 54mm Standard Metric	64038	39538
726 x 2040 x 54mm Standard Metric	64037	39537
626 x 2040 x 54mm Standard Metric	64036	39536
838 x 1981 x 54mm (2'9" x 6'6")	64014	39514
813 x 2032 x 54mm (2'8" x 6'8")	64069	39539
762 x 1981 x 54mm (2'6" x 6'6")	64011	39511
686 x 1981 x 54mm (2'3" x 6'6")	64016	39516

In Stock

See P13

Option Plus

See P112

Technical Information

See P114

Stocking Policy

Green Tint Flashed items are available from stock on a 3 day lead-time from key order date, terms and conditions apply, see page 123 for further details.

Light Grey Horizontal



Light Grey 2 Stile



Light Grey 4 Line Horizontal



Solid Core

Door Size	Light Grey Horizontal Code	Light Grey 2 Stile Code	Light Grey 4 Line Horizontal Code
926 x 2040 x 40mm Standard Metric	84229	89529	89429
826 x 2040 x 40mm Standard Metric	84238	89538	89438
726 x 2040 x 40mm Standard Metric	84237	89537	89437
626 x 2040 x 40mm Standard Metric	84236	89536	89436
526 x 2040 x 40mm Standard Metric	84235	-	89435
426 x 2040 x 40mm Standard Metric	84234	-	89434
864 x 1981 x 35mm (2'10" x 6'6")	84277	89577	89477
838 x 1981 x 35mm (2'9" x 6'6")	84214	89514	89414
813 x 2032 x 35mm (2'8" x 6'8")	84269	89569	89469
762 x 1981 x 35mm (2'6" x 6'6")	84211	89511	89411
711 x 1981 x 35mm (2'4" x 6'6")	84215		89415
686 x 1981 x 35mm (2'3" x 6'6")	84216	89516	89416
610 x 1981 x 35mm (2'0" x 6'6")	84217	89517	89417
533 x 1981 x 35mm (1'9" x 6'6")	84218	-	89418
457 x 1981 x 35mm (1'6" x 6'6")	84219	-	89419

FD30 Fireshield

Door Size	Code	Code	Code
926 x 2040 x 44mm Standard Metric	88729	88129	88029
826 x 2040 x 44mm Standard Metric	88738	88138	88038
726 x 2040 x 44mm Standard Metric	88737	88137	88037
626 x 2040 x 44mm Standard Metric	88736	88136	88036
526 x 2040 x 44mm Standard Metric	88735	-	88035
426 x 2040 x 44mm Standard Metric	88734	-	88034
914 x 1981 x 44mm (3'0" x 6'6")	88778	-	-
864 x 1981 x 44mm (2'10" x 6'6")	88777	88177	88077
838 x 1981 x 44mm (2'9" x 6'6")	88714	88114	88014
813 x 2032 x 44mm (2'8" x 6'8")	88769	88169	88069
762 x 1981 x 44mm (2'6" x 6'6")	88711	88111	88011
711 x 1981 x 44mm (2'4" x 6'6")	88715	-	88015
686 x 1981 x 44mm (2'3" x 6'6")	88716	88116	88016
610 x 1981 x 44mm (2'0" x 6'6")	88717	88117	88017
533 x 1981 x 44mm (1'9" x 6'6")	88718	-	88018
457 x 1981 x 44mm (1'6" x 6'6")	88719	-	88019

FD60 Firemaster

Door Size	Code	Code	Code
926 x 2040 x 54mm Standard Metric	85729	85129	83929
826 x 2040 x 54mm Standard Metric	85738	85138	83938
726 x 2040 x 54mm Standard Metric	85737	85137	83937
626 x 2040 x 54mm Standard Metric	85736	85136	83936
838 x 1981 x 54mm (2'9" x 6'6")	85714	85114	83914
813 x 2032 x 54mm (2'8" x 6'8")	85769	85169	83969
762 x 1981 x 54mm (2'6" x 6'6")	85711	85111	83911
686 x 1981 x 54mm (2'3" x 6'6")	85716	85116	83916

Charcoal Horizontal



Charcoal 4 Line Horizontal



Solid Core

Door Size	Charcoal Horizontal Code	Charcoal 4 Line Horizontal Code
926 x 2040 x 40mm Standard Metric	89929	89329
826 x 2040 x 40mm Standard Metric	89938	89338
726 x 2040 x 40mm Standard Metric	89937	89337
626 x 2040 x 40mm Standard Metric	89936	89336
526 x 2040 x 40mm Standard Metric	89935	89335
426 x 2040 x 40mm Standard Metric	89934	89334
864 x 1981 x 35mm (2'10" x 6'6")	89977	89377
838 x 1981 x 35mm (2'9" x 6'6")	89914	89314
813 x 2032 x 35mm (2'8" x 6'8")	89969	89369
762 x 1981 x 35mm (2'6" x 6'6")	89911	89311
711 x 1981 x 35mm (2'4" x 6'6")	89915	89315
686 x 1981 x 35mm (2'3" x 6'6")	89916	89316
610 x 1981 x 35mm (2'0" x 6'6")	89917	89317
533 x 1981 x 35mm (1'9" x 6'6")	89918	89318
457 x 1981 x 35mm (1'6" x 6'6")	89919	89319

FD30 Fireshield

Door Size	Code	Code
926 x 2040 x 44mm Standard Metric	88529	87929
826 x 2040 x 44mm Standard Metric	88538	87938
726 x 2040 x 44mm Standard Metric	88537	87937
626 x 2040 x 44mm Standard Metric	88536	87936
526 x 2040 x 44mm Standard Metric	88535	87935
426 x 2040 x 44mm Standard Metric	88534	87934
914 x 1981 x 44mm (3'0" x 6'6")	88578	87978
864 x 1981 x 44mm (2'10" x 6'6")	88577	87977
838 x 1981 x 44mm (2'9" x 6'6")	88514	87914
813 x 2032 x 44mm (2'8" x 6'8")	88569	87969
762 x 1981 x 44mm (2'6" x 6'6")	88511	87911
711 x 1981 x 44mm (2'4" x 6'6")	88515	87915
686 x 1981 x 44mm (2'3" x 6'6")	88516	87916
610 x 1981 x 44mm (2'0" x 6'6")	88517	87917
533 x 1981 x 44mm (1'9" x 6'6")	88518	87918
457 x 1981 x 44mm (1'6" x 6'6")	88519	87919

FD60 Firemaster

Door Size	Code	Code
926 x 2040 x 54mm Standard Metric	85529	83829
826 x 2040 x 54mm Standard Metric	85538	83838
726 x 2040 x 54mm Standard Metric	85537	83837
626 x 2040 x 54mm Standard Metric	85536	83836
838 x 1981 x 54mm (2'9" x 6'6")	85514	83814
813 x 2032 x 54mm (2'8" x 6'8")	85569	83869
762 x 1981 x 54mm (2'6" x 6'6")	85511	83811
686 x 1981 x 54mm (2'3" x 6'6")	85516	83816

Option Plus
See P112

Technical Information
See P114


Anegre
P22



Standard Veneer

Simple and elegant, veneered doors have the ability to complement any interior.

Combining design and expert craftmanship Premdor veneered doors are created by hand-laying high-quality natural timber veneers over both faces of the doors core, whilst also concealing the edges.

Steamed Beech



Koto



Anegre



Standard Core

Door Size	Steamed Beech Code	Koto Code	Anegre Code
926 x 2040 x 40mm Standard Metric	10729	18429	15129
826 x 2040 x 40mm Standard Metric	10738	18438	15138
726 x 2040 x 40mm Standard Metric	10737	18437	15137
626 x 2040 x 40mm Standard Metric	10736	18436	15136
526 x 2040 x 40mm Standard Metric	10735	18435	15135
426 x 2040 x 40mm Standard Metric	10734	18434	15134
864 x 1981 x 35mm (2'10" x 6'6")	10777	18477	15177
838 x 1981 x 35mm (2'9" x 6'6")	10714	18414	15114
813 x 2032 x 35mm (2'8" x 6'8")	10739	18439	15139
762 x 1981 x 35mm (2'6" x 6'6")	10711	18411	15111
711 x 1981 x 35mm (2'4" x 6'6")	10715	18415	15115
686 x 1981 x 35mm (2'3" x 6'6")	10716	18416	15116
610 x 1981 x 35mm (2'0" x 6'6")	10717	18417	15117
533 x 1981 x 35mm (1'9" x 6'6")	10718	18418	15118
457 x 1981 x 35mm (1'6" x 6'6")	10719	18419	15119

FD30 Fireshield

Door Size	Steamed Beech Code	Koto Code	Anegre Code
926 x 2040 x 44mm Standard Metric	10829	29429	29829
826 x 2040 x 44mm Standard Metric	10838	29438	29838
726 x 2040 x 44mm Standard Metric	10837	29437	29837
626 x 2040 x 44mm Standard Metric	10836	29436	29836
526 x 2040 x 44mm Standard Metric	10835	29435	29835
426 x 2040 x 44mm Standard Metric	10834	29434	29834
914 x 1981 x 44mm (3'0" x 6'6")	10878	29478	29878
864 x 1981 x 44mm (2'10" x 6'6")	10877	29477	29877
838 x 1981 x 44mm (2'9" x 6'6")	10866	29414	29814
813 x 2032 x 44mm (2'8" x 6'8")	10865	29469	29869
762 x 1981 x 44mm (2'6" x 6'6")	10864	29411	29811
711 x 1981 x 44mm (2'4" x 6'6")	10815	29462	29862
686 x 1981 x 44mm (2'3" x 6'6")	10867	29416	29816
610 x 1981 x 44mm (2'0" x 6'6")	10863	29417	29817
533 x 1981 x 44mm (1'9" x 6'6")	10818	29418	29818
457 x 1981 x 44mm (1'6" x 6'6")	10819	29419	29819

FD60 Firemaster

Door Size	Steamed Beech Code	Koto Code	Anegre Code
926 x 2040 x 54mm Standard Metric	18929	18029	17929
826 x 2040 x 54mm Standard Metric	18938	18038	17938
726 x 2040 x 54mm Standard Metric	18937	18037	17937
626 x 2040 x 54mm Standard Metric	18936	18036	17936
838 x 1981 x 54mm (2'9" x 6'6")	18914	18014	17914
813 x 2032 x 54mm (2'8" x 6'8")	18939	18039	17939
762 x 1981 x 54mm (2'6" x 6'6")	18911	18011	17911
686 x 1981 x 54mm (2'3" x 6'6")	18916	18016	17916

American White Oak



American White Oak

Standard Core

Door Size	Code
926 x 2040 x 40mm Standard Metric	15329
826 x 2040 x 40mm Standard Metric	15338
726 x 2040 x 40mm Standard Metric	15337
626 x 2040 x 40mm Standard Metric	15336
526 x 2040 x 40mm Standard Metric	15335
426 x 2040 x 40mm Standard Metric	15334
864 x 1981 x 35mm (2'10" x 6'6")	15377
838 x 1981 x 35mm (2'9" x 6'6")	15314
813 x 2032 x 35mm (2'8" x 6'8")	15339
762 x 1981 x 35mm (2'6" x 6'6")	15311
711 x 1981 x 35mm (2'4" x 6'6")	15315
686 x 1981 x 35mm (2'3" x 6'6")	15316
610 x 1981 x 35mm (2'0" x 6'6")	15317
533 x 1981 x 35mm (1'9" x 6'6")	15318
457 x 1981 x 35mm (1'6" x 6'6")	15319

Solid Core

Door Size	Code
864 x 1981 x 35mm (2'10" x 6'6")	15408
838 x 1981 x 35mm (2'9" x 6'6")	15407
813 x 2032 x 35mm (2'8" x 6'8")	15406
762 x 1981 x 35mm (2'6" x 6'6")	15405
686 x 1981 x 35mm (2'3" x 6'6")	15404
610 x 1981 x 35mm (2'0" x 6'6")	15403
533 x 1981 x 35mm (1'9" x 6'6")	15402
457 x 1981 x 35mm (1'6" x 6'6")	15401
381 x 1981 x 35mm (1'3" x 6'6")	15400

FD30 Fireshield

Door Size	Code
926 x 2040 x 44mm Standard Metric	25329
826 x 2040 x 44mm Standard Metric	25338
726 x 2040 x 44mm Standard Metric	25337
626 x 2040 x 44mm Standard Metric	25336
526 x 2040 x 44mm Standard Metric	25335
426 x 2040 x 44mm Standard Metric	25334
914 x 1981 x 44mm (3'0" x 6'6")	25378
864 x 1981 x 44mm (2'10" x 6'6")	25377
838 x 1981 x 44mm (2'9" x 6'6")	25314
813 x 2032 x 44mm (2'8" x 6'8")	25369
762 x 1981 x 44mm (2'6" x 6'6")	25311
711 x 1981 x 44mm (2'4" x 6'6")	25362
686 x 1981 x 44mm (2'3" x 6'6")	25316
610 x 1981 x 44mm (2'0" x 6'6")	25363
533 x 1981 x 44mm (1'9" x 6'6")	25318
457 x 1981 x 44mm (1'6" x 6'6")	25319

FD30 Fireshield Framed Construction

Door Size	Code
926 x 2040 x 44mm Standard Metric	81515
826 x 2040 x 44mm Standard Metric	81512
726 x 2040 x 44mm Standard Metric	81509
626 x 2040 x 44mm Standard Metric	81506
526 x 2040 x 44mm Standard Metric	81503
426 x 2040 x 44mm Standard Metric	81501
864 x 1981 x 44mm (2'10" x 6'6")	81514
838 x 1981 x 44mm (2'9" x 6'6")	81513
813 x 2032 x 44mm (2'8" x 6'8")	81511
762 x 1981 x 44mm (2'6" x 6'6")	81510
711 x 1981 x 44mm (2'4" x 6'6")	81508
686 x 1981 x 44mm (2'3" x 6'6")	81507
610 x 1981 x 44mm (2'0" x 6'6")	81505
533 x 1981 x 44mm (1'9" x 6'6")	81504
457 x 1981 x 44mm (1'6" x 6'6")	81502

FD60 Firemaster

Door Size	Code
926 x 2040 x 54mm Standard Metric	10929
826 x 2040 x 54mm Standard Metric	10938
726 x 2040 x 54mm Standard Metric	10937
626 x 2040 x 54mm Standard Metric	10936
838 x 1981 x 54mm (2'9" x 6'6")	10914
813 x 2032 x 54mm (2'8" x 6'8")	10939
762 x 1981 x 54mm (2'6" x 6'6")	10911
686 x 1981 x 54mm (2'3" x 6'6")	10916

In Stock

See P13

Option Plus

See P112

Technical Information

See P114

European Ash



American Black Walnut



Sapele



Standard Core

Door Size	European Ash Code	American Black Walnut Code	Sapele Code
926 x 2040 x 40mm Standard Metric	17029	12535	18129
826 x 2040 x 40mm Standard Metric	17038	12534	18138
726 x 2040 x 40mm Standard Metric	17037	12533	18137
626 x 2040 x 40mm Standard Metric	17036	12532	18136
526 x 2040 x 40mm Standard Metric	17035	12531	18135
426 x 2040 x 40mm Standard Metric	17034	12530	18134
864 x 1981 x 35mm (2'10" x 6'6")	17077	12529	18177
838 x 1981 x 35mm (2'9" x 6'6")	17014	12528	18114
813 x 2032 x 35mm (2'8" x 6'8")	17039	12527	18139
762 x 1981 x 35mm (2'6" x 6'6")	17011	12526	18111
711 x 1981 x 35mm (2'4" x 6'6")	17015	12525	18115
686 x 1981 x 35mm (2'3" x 6'6")	17016	12524	18116
610 x 1981 x 35mm (2'0" x 6'6")	17017	12523	18117
533 x 1981 x 35mm (1'9" x 6'6")	17018	12522	18118
457 x 1981 x 35mm (1'6" x 6'6")	17019	12521	18119
381 x 1981 x 35mm (1'3" x 6'6")	-	-	18120

FD30 Fireshield

Door Size	Code	Code	Code
926 x 2040 x 44mm Standard Metric	27029	12565	29129
826 x 2040 x 44mm Standard Metric	27038	12562	29138
726 x 2040 x 44mm Standard Metric	27037	12559	29137
626 x 2040 x 44mm Standard Metric	27036	12556	29136
526 x 2040 x 44mm Standard Metric	27035	12553	29135
426 x 2040 x 44mm Standard Metric	27034	12551	29134
807 x 2000 x 44mm Standard Metric	-	-	29148
914 x 1981 x 44mm (3'0" x 6'6")	27078	12566	29178
864 x 1981 x 44mm (2'10" x 6'6")	27077	12564	29177
838 x 1981 x 44mm (2'9" x 6'6")	27014	12563	29114
813 x 2032 x 44mm (2'8" x 6'8")	27069	12561	29139
762 x 1981 x 44mm (2'6" x 6'6")	27011	12560	29111
711 x 1981 x 44mm (2'4" x 6'6")	27062	12558	29115
686 x 1981 x 44mm (2'3" x 6'6")	27016	12557	29116
610 x 1981 x 44mm (2'0" x 6'6")	27017	12555	29117
533 x 1981 x 44mm (1'9" x 6'6")	27018	12554	29118
457 x 1981 x 44mm (1'6" x 6'6")	27019	12552	29119

FD30 Fireshield Framed Construction

Door Size	Code	Code	Code
926 x 2040 x 44mm Standard Metric	81315	81586	-
826 x 2040 x 44mm Standard Metric	81312	81583	-
726 x 2040 x 44mm Standard Metric	81309	81580	-
626 x 2040 x 44mm Standard Metric	81306	81577	-
526 x 2040 x 44mm Standard Metric	81303	81574	-
426 x 2040 x 44mm Standard Metric	81301	81572	-
846 x 1981 x 44mm (2'10" x 6'6")	81314	81585	-
838 x 1981 x 44mm (2'9" x 6'6")	81313	81584	-
813 x 2032 x 44mm (2'8" x 6'8")	81311	81582	-
762 x 1981 x 44mm (2'6" x 6'6")	81310	81581	-
711 x 1981 x 44mm (2'4" x 6'6")	81308	81579	-
686 x 1981 x 44mm (2'3" x 6'6")	81307	81578	-
610 x 1981 x 44mm (2'0" x 6'6")	81305	81576	-
533 x 1981 x 44mm (1'9" x 6'6")	81304	81575	-
457 x 1981 x 44mm (1'6" x 6'6")	81302	81573	-

FD60 Firemaster

Door Size	Code	Code	Code
926 x 2040 x 54mm Standard Metric	15829	12587	26429
826 x 2040 x 54mm Standard Metric	15838	12586	26438
726 x 2040 x 54mm Standard Metric	15837	12585	26437
626 x 2040 x 54mm Standard Metric	15836	12584	26436
838 x 1981 x 54mm (2'9" x 6'6")	15814	12573	26414
813 x 2032 x 54mm (2'8" x 6'8")	15839	12572	26439
762 x 1981 x 54mm (2'6" x 6'6")	15811	12571	26411
686 x 1981 x 54mm (2'3" x 6'6")	15816	12570	26416

In Stock

See P13

Option Plus

See P112

Technical Information

See P114


American White Oak
P23





Moulded

The moulded door, a timeless classic. Suitable for any home, its versatility gives you the opportunity to make your interior yours.

Our speciality, a moulded door can come in all shapes and sizes, whether it be the standard 4 panel textured, or contemporary ladder design.

Shallow Moulded 3 Panel
Smooth P29



Paint Match
Boulevard
Pantone® 18-3906 TCX

Door shown painted for illustration purposes only.

Shallow Moulded 2 Panel Smooth



Shallow Moulded 3 Panel Smooth



Option Plus

See P112

Technical Information

See P114

Standard Core

Door Size	Shallow Moulded 2 Panel Smooth Code	Shallow Moulded 3 Panel Smooth Code
926 x 2040 x 40mm Standard Metric	50150	50350
826 x 2040 x 40mm Standard Metric	50151	50351
726 x 2040 x 40mm Standard Metric	50152	50352
626 x 2040 x 40mm Standard Metric	50153	50353
526 x 2040 x 40mm Standard Metric	50154	50354
914 x 1981 x 35mm (3'0" x 6'6")	50155	50355
864 x 1981 x 35mm (2'10" x 6'6")	50156	50356
838 x 1981 x 35mm (2'9" x 6'6")	50157	50357
762 x 1981 x 35mm (2'6" x 6'6")	50158	50358
711 x 1981 x 35mm (2'4" x 6'6")	50159	50359
686 x 1981 x 35mm (2'3" x 6'6")	50160	50360
610 x 1981 x 35mm (2'0" x 6'6")	50161	50361
533 x 1981 x 35mm (1'9" x 6'6")	50162	50362
457 x 1981 x 35mm (1'6" x 6'6")	50163	50363

Semi Solid

Door Size	Code	Code
926 x 2040 x 40mm Standard Metric	50164	50364
826 x 2040 x 40mm Standard Metric	50165	50365
726 x 2040 x 40mm Standard Metric	50166	50366
626 x 2040 x 40mm Standard Metric	50167	50367
526 x 2040 x 40mm Standard Metric	50168	50368
914 x 1981 x 35mm (3'0" x 6'6")	50169	50369
864 x 1981 x 35mm (2'10" x 6'6")	50170	50370
838 x 1981 x 35mm (2'9" x 6'6")	50171	50371
762 x 1981 x 35mm (2'6" x 6'6")	50172	50372
711 x 1981 x 35mm (2'4" x 6'6")	50173	50373
686 x 1981 x 35mm (2'3" x 6'6")	50174	50374
610 x 1981 x 35mm (2'0" x 6'6")	50175	50375
533 x 1981 x 35mm (1'9" x 6'6")	50176	50376
457 x 1981 x 35mm (1'6" x 6'6")	50177	50377

Safe 'N' Sound

Door Size	Code	Code
926 x 2040 x 40mm Standard Metric	50178	50378
826 x 2040 x 40mm Standard Metric	50179	50379
726 x 2040 x 40mm Standard Metric	50180	50380
626 x 2040 x 40mm Standard Metric	50181	50381
526 x 2040 x 40mm Standard Metric	50182	50382
914 x 1981 x 35mm (3'0" x 6'6")	50183	50383
864 x 1981 x 35mm (2'10" x 6'6")	50184	50384
838 x 1981 x 35mm (2'9" x 6'6")	50185	50385
762 x 1981 x 35mm (2'6" x 6'6")	50186	50386
711 x 1981 x 35mm (2'4" x 6'6")	50187	50387
686 x 1981 x 35mm (2'3" x 6'6")	50188	50388
610 x 1981 x 35mm (2'0" x 6'6")	50189	50389
533 x 1981 x 35mm (1'9" x 6'6")	50190	50390
457 x 1981 x 35mm (1'6" x 6'6")	50191	50391

FD30 Fireshield

Door Size	Code	Code
926 x 2040 x 44mm Standard Metric	50192	50392
826 x 2040 x 44mm Standard Metric	50193	50393
726 x 2040 x 44mm Standard Metric	50194	50394
626 x 2040 x 44mm Standard Metric	50195	50395
526 x 2040 x 44mm Standard Metric	50196	50396
914 x 1981 x 44mm (3'0" x 6'6")	50197	50397
864 x 1981 x 44mm (2'10" x 6'6")	50198	50398
838 x 1981 x 44mm (2'9" x 6'6")	50199	50399
762 x 1981 x 44mm (2'6" x 6'6")	50200	50400
711 x 1981 x 44mm (2'4" x 6'6")	50201	50401
686 x 1981 x 44mm (2'3" x 6'6")	50202	50402
610 x 1981 x 44mm (2'0" x 6'6")	50203	50403
533 x 1981 x 44mm (1'9" x 6'6")	50204	50404
457 x 1981 x 44mm (1'6" x 6'6")	50205	50405

FD60 Firemaster

Door Size	Code	Code
926 x 2040 x 54mm Standard Metric	50215	50415
826 x 2040 x 54mm Standard Metric	50216	50416
726 x 2040 x 54mm Standard Metric	50217	50417
626 x 2040 x 54mm Standard Metric	50218	50418
526 x 2040 x 54mm Standard Metric	50219	50419
914 x 1981 x 54mm (3'0" x 6'6")	50220	50420
864 x 1981 x 54mm (2'10" x 6'6")	50221	50421
838 x 1981 x 54mm (2'9" x 6'6")	50222	50422
762 x 1981 x 54mm (2'6" x 6'6")	50223	50423
711 x 1981 x 54mm (2'4" x 6'6")	50224	50424
686 x 1981 x 54mm (2'3" x 6'6")	50225	50425
610 x 1981 x 54mm (2'0" x 6'6")	50226	50426
533 x 1981 x 54mm (1'9" x 6'6")	50227	50427
457 x 1981 x 54mm (1'6" x 6'6")	50228	50428

Ladder Smooth

1 Panel Smooth



In Stock

See P13

Option Plus

See P112

Technical Information

See P114

Standard Core

Door Size	Ladder Smooth Code	1 Panel Smooth Code
926 x 2040 x 40mm Standard Metric	49229	46129
826 x 2040 x 40mm Standard Metric	49238	46138
726 x 2040 x 40mm Standard Metric	49237	46137
626 x 2040 x 40mm Standard Metric	49236	46136
526 x 2040 x 40mm Standard Metric	49235	46135
914 x 1981 x 35mm (3'0" x 6'6")	49280	46180
864 x 1981 x 35mm (2'10" x 6'6")	49277	46177
838 x 1981 x 35mm (2'9" x 6'6")	49214	46114
813 x 2032 x 35mm (2'8" x 6'8")	49239	46139
762 x 1981 x 35mm (2'6" x 6'6")	49211	46111
711 x 1981 x 35mm (2'4" x 6'6")	49215	46115
686 x 1981 x 35mm (2'3" x 6'6")	49216	46116
610 x 1981 x 35mm (2'0" x 6'6")	49217	46117
533 x 1981 x 35mm (1'9" x 6'6")	49218	46118
457 x 1981 x 35mm (1'6" x 6'6")	-	46119

Semi Solid

Door Size	Ladder Smooth Code	1 Panel Smooth Code
926 x 2040 x 40mm Standard Metric	49629	53029
826 x 2040 x 40mm Standard Metric	49638	53038
726 x 2040 x 40mm Standard Metric	49637	53037
626 x 2040 x 40mm Standard Metric	49636	53036
526 x 2040 x 40mm Standard Metric	49635	53035
914 x 1981 x 35mm (3'0" x 6'6")	49680	53080
864 x 1981 x 35mm (2'10" x 6'6")	49677	53077
838 x 1981 x 35mm (2'9" x 6'6")	49614	53014
762 x 1981 x 35mm (2'6" x 6'6")	49611	53011
686 x 1981 x 35mm (2'3" x 6'6")	49616	53016
610 x 1981 x 35mm (2'0" x 6'6")	49617	53017
533 x 1981 x 35mm (1'9" x 6'6")	49618	53018
457 x 1981 x 35mm (1'6" x 6'6")	-	53019

Safe 'N' Sound

Door Size	Ladder Smooth Code	1 Panel Smooth Code
926 x 2040 x 40mm Standard Metric	52929	66329
826 x 2040 x 40mm Standard Metric	52938	66338
726 x 2040 x 40mm Standard Metric	52937	66337
626 x 2040 x 40mm Standard Metric	52936	66336
526 x 2040 x 40mm Standard Metric	52935	66335
914 x 1981 x 35mm (3'0" x 6'6")	52980	66380
864 x 1981 x 35mm (2'10" x 6'6")	52977	66377
838 x 1981 x 35mm (2'9" x 6'6")	52914	66314
762 x 1981 x 35mm (2'6" x 6'6")	52911	66311
686 x 1981 x 35mm (2'3" x 6'6")	52916	66316
610 x 1981 x 35mm (2'0" x 6'6")	52917	66317
533 x 1981 x 35mm (1'9" x 6'6")	52918	66318
457 x 1981 x 35mm (1'6" x 6'6")	-	66319

FD30 Fireshield

Door Size	Ladder Smooth Code	1 Panel Smooth Code
926 x 2040 x 44mm Standard Metric	49329	46229
826 x 2040 x 44mm Standard Metric	49338	46238
726 x 2040 x 44mm Standard Metric	49337	46237
626 x 2040 x 44mm Standard Metric	49336	46236
526 x 2040 x 44mm Standard Metric	49335	46235
914 x 1981 x 44mm (3'0" x 6'6")	49380	46280
864 x 1981 x 44mm (2'10" x 6'6")	49377	46277
838 x 1981 x 44mm (2'9" x 6'6")	49314	46214
813 x 2032 x 44mm (2'8" x 6'8")	49339	46239
762 x 1981 x 44mm (2'6" x 6'6")	49311	46211
711 x 1981 x 44mm (2'4" x 6'6")	49315	46215
686 x 1981 x 44mm (2'3" x 6'6")	49316	46216
610 x 1981 x 44mm (2'0" x 6'6")	49317	46217
533 x 1981 x 44mm (1'9" x 6'6")	49318	46218
457 x 1981 x 44mm (1'6" x 6'6")	-	46219

FD60 Firemaster

Door Size	Ladder Smooth Code	1 Panel Smooth Code
926 x 2040 x 54mm Standard Metric	49429	13303
826 x 2040 x 54mm Standard Metric	49438	13304
726 x 2040 x 54mm Standard Metric	49437	13305
626 x 2040 x 54mm Standard Metric	49436	13306
914 x 1981 x 54mm (3'0" x 6'6")	49480	13313
838 x 1981 x 54mm (2'9" x 6'6")	49414	13289
813 x 2032 x 54mm (2'8" x 6'8")	49439	13300
762 x 1981 x 54mm (2'6" x 6'6")	49411	13301
686 x 1981 x 54mm (2'3" x 6'6")	49416	13302

Horizontal 4 Line Smooth



Horizontal 4 Line Smooth

Standard Core

Door Size	Code
926 x 2040 x 40mm Standard Metric	46329
826 x 2040 x 40mm Standard Metric	46338
726 x 2040 x 40mm Standard Metric	46337
626 x 2040 x 40mm Standard Metric	46336
526 x 2040 x 40mm Standard Metric	46335
914 x 1981 x 35mm (3'0" x 6'6")	46380
864 x 1981 x 35mm (2'10" x 6'6")	46377
838 x 1981 x 35mm (2'9" x 6'6")	46314
813 x 2032 x 35mm (2'8" x 6'8")	46339
762 x 1981 x 35mm (2'6" x 6'6")	46311
711 x 1981 x 35mm (2'4" x 6'6")	46315
686 x 1981 x 35mm (2'3" x 6'6")	46316
610 x 1981 x 35mm (2'0" x 6'6")	46317
533 x 1981 x 35mm (1'9" x 6'6")	46318
457 x 1981 x 35mm (1'6" x 6'6")	46319

Semi Solid

Door Size	Code
926 x 2040 x 40mm Standard Metric	48229
826 x 2040 x 40mm Standard Metric	48238
726 x 2040 x 40mm Standard Metric	48237
626 x 2040 x 40mm Standard Metric	48236
526 x 2040 x 40mm Standard Metric	48235
914 x 1981 x 35mm (3'0" x 6'6")	48280
864 x 1981 x 35mm (2'10" x 6'6")	48277
838 x 1981 x 35mm (2'9" x 6'6")	48214
762 x 1981 x 35mm (2'6" x 6'6")	48211
686 x 1981 x 35mm (2'3" x 6'6")	48216
610 x 1981 x 35mm (2'0" x 6'6")	48217
533 x 1981 x 35mm (1'9" x 6'6")	48218
457 x 1981 x 35mm (1'6" x 6'6")	48219

Safe 'N' Sound

Door Size	Code
926 x 2040 x 40mm Standard Metric	48329
826 x 2040 x 40mm Standard Metric	48338
726 x 2040 x 40mm Standard Metric	48337
626 x 2040 x 40mm Standard Metric	48336
526 x 2040 x 40mm Standard Metric	48335
914 x 1981 x 35mm (3'0" x 6'6")	48380
864 x 1981 x 35mm (2'10" x 6'6")	48377
838 x 1981 x 35mm (2'9" x 6'6")	48314
762 x 1981 x 35mm (2'6" x 6'6")	48311
686 x 1981 x 35mm (2'3" x 6'6")	48316
610 x 1981 x 35mm (2'0" x 6'6")	48317
533 x 1981 x 35mm (1'9" x 6'6")	48318
457 x 1981 x 35mm (1'6" x 6'6")	48319

FD30 Fireshield

Door Size	Code
926 x 2040 x 44mm Standard Metric	46429
826 x 2040 x 44mm Standard Metric	46438
726 x 2040 x 44mm Standard Metric	46437
626 x 2040 x 44mm Standard Metric	46436
526 x 2040 x 44mm Standard Metric	46435
914 x 1981 x 44mm (3'0" x 6'6")	46480
864 x 1981 x 44mm (2'10" x 6'6")	46477
838 x 1981 x 44mm (2'9" x 6'6")	46414
813 x 2032 x 44mm (2'8" x 6'8")	46439
762 x 1981 x 44mm (2'6" x 6'6")	46411
711 x 1981 x 44mm (2'4" x 6'6")	46415
686 x 1981 x 44mm (2'3" x 6'6")	46416
610 x 1981 x 44mm (2'0" x 6'6")	46417
533 x 1981 x 44mm (1'9" x 6'6")	46418
457 x 1981 x 44mm (1'6" x 6'6")	46419

FD60 Firemaster

Door Size	Code
926 x 2040 x 54mm Standard Metric	13329
826 x 2040 x 54mm Standard Metric	13338
726 x 2040 x 54mm Standard Metric	13337
626 x 2040 x 54mm Standard Metric	13336
914 x 1981 x 54mm (3'0" x 6'6")	13340
838 x 1981 x 54mm (2'9" x 6'6")	13307
813 x 2032 x 54mm (2'8" x 6'8")	13314
762 x 1981 x 54mm (2'6" x 6'6")	13308
686 x 1981 x 54mm (2'3" x 6'6")	13316

In Stock

See P13

Option Plus

See P112

Technical Information

See P114

Vertical 5 Panel Smooth
P33



Paint Match
Dulux Heritage
Sage Green

Door shown painted for illustration purposes only.

Vertical 5 Panel Textured



Vertical 5 Panel Smooth



In Stock

See P13

Option Plus

See P112

Technical Information

See P114

Standard Core

Door Size	Vertical 5 Panel Textured Code	Vertical 5 Panel Smooth Code
926 x 2040 x 40mm Standard Metric	37529	32114
826 x 2040 x 40mm Standard Metric	37538	32113
726 x 2040 x 40mm Standard Metric	37537	32112
626 x 2040 x 40mm Standard Metric	37536	32111
914 x 1981 x 35mm (3'0" x 6'6")	37580	32110
864 x 1981 x 35mm (2'10" x 6'6")	37577	32109
838 x 1981 x 35mm (2'9" x 6'6")	37514	32108
813 x 2032 x 35mm (2'8" x 6'8")	37539	32107
762 x 1981 x 35mm (2'6" x 6'6")	37511	32106
711 x 1981 x 35mm (2'4" x 6'6")	37515	32105
686 x 1981 x 35mm (2'3" x 6'6")	37516	32104
610 x 1981 x 35mm (2'0" x 6'6")	37517	32103
533 x 1981 x 35mm (1'9" x 6'6")	37518	-

Semi Solid

Door Size	Code	Code
926 x 2040 x 40mm Standard Metric	41729	32231
826 x 2040 x 40mm Standard Metric	41738	32230
726 x 2040 x 40mm Standard Metric	41737	32229
626 x 2040 x 40mm Standard Metric	41736	32228
526 x 2040 x 40mm Standard Metric	-	-
914 x 1981 x 35mm (3'0" x 6'6")	41780	32227
864 x 1981 x 35mm (2'10" x 6'6")	41777	32226
838 x 1981 x 35mm (2'9" x 6'6")	41714	32225
762 x 1981 x 35mm (2'6" x 6'6")	41711	32224
686 x 1981 x 35mm (2'3" x 6'6")	41716	32222
610 x 1981 x 35mm (2'0" x 6'6")	41717	32221
533 x 1981 x 35mm (1'9" x 6'6")	41718	-

Safe 'N' Sound

Door Size	Code	Code
926 x 2040 x 40mm Standard Metric	38429	32250
826 x 2040 x 40mm Standard Metric	38438	32249
726 x 2040 x 40mm Standard Metric	38437	32248
626 x 2040 x 40mm Standard Metric	38436	32247
914 x 1981 x 35mm (3'0" x 6'6")	38480	32246
864 x 1981 x 35mm (2'10" x 6'6")	38477	32245
838 x 1981 x 35mm (2'9" x 6'6")	38414	32244
762 x 1981 x 35mm (2'6" x 6'6")	38411	32243
686 x 1981 x 35mm (2'3" x 6'6")	38416	32242
610 x 1981 x 35mm (2'0" x 6'6")	38417	-
533 x 1981 x 35mm (1'9" x 6'6")	38418	-

FD30 Fireshield

Door Size	Code	Code
926 x 2040 x 44mm Standard Metric	40029	32273
826 x 2040 x 44mm Standard Metric	40038	32272
726 x 2040 x 44mm Standard Metric	40037	32271
626 x 2040 x 44mm Standard Metric	40036	32270
914 x 1981 x 44mm (3'0" x 6'6")	40080	32269
864 x 1981 x 44mm (2'10" x 6'6")	40077	32268
838 x 1981 x 44mm (2'9" x 6'6")	40014	32267
813 x 2032 x 44mm (2'8" x 6'8")	40039	32266
762 x 1981 x 44mm (2'6" x 6'6")	40011	32265
711 x 1981 x 44mm (2'4" x 6'6")	40015	32264
686 x 1981 x 44mm (2'3" x 6'6")	40016	32263
610 x 1981 x 44mm (2'0" x 6'6")	40017	32262
533 x 1981 x 44mm (1'9" x 6'6")	40018	-

FD60 Firemaster

Door Size	Code	Code
926 x 2040 x 54mm Standard Metric	40529	32289
826 x 2040 x 54mm Standard Metric	40538	32288
726 x 2040 x 54mm Standard Metric	40537	32287
626 x 2040 x 54mm Standard Metric	40536	32286
914 x 1981 x 54mm (3'0" x 6'6")	40580	32285
864 x 1981 x 44mm (2'10" x 6'6")	-	32284
838 x 1981 x 54mm (2'9" x 6'6")	40514	32283
813 x 2032 x 54mm (2'8" x 6'8")	40539	32282
762 x 1981 x 54mm (2'6" x 6'6")	40511	32281
686 x 1981 x 54mm (2'3" x 6'6")	40516	32280

2 Panel Smooth



2 Panel Arch Top Textured



[1] Two Panel Smooth 457mm (1'6") and 533mm (1'9") doors have reduced stile widths.

In Stock

See P13

Option Plus

See P112

Technical Information

See P114

Standard Core

Door Size	2 Panel Smooth Code	2 Panel Arch Top Textured Code
926 x 2040 x 40mm Standard Metric	15429	19729
826 x 2040 x 40mm Standard Metric	15438	19738
726 x 2040 x 40mm Standard Metric	15437	19737
626 x 2040 x 40mm Standard Metric	15436	19736
526 x 2040 x 40mm Standard Metric	15435	19735
914 x 1981 x 35mm (3'0" x 6'6")	15480	19780
864 x 1981 x 35mm (2'10" x 6'6")	15477	-
838 x 1981 x 35mm (2'9" x 6'6")	15414	19714
813 x 2032 x 35mm (2'8" x 6'8")	15439	19739
762 x 1981 x 35mm (2'6" x 6'6")	15411	19711
711 x 1981 x 35mm (2'4" x 6'6")	15415	19715
686 x 1981 x 35mm (2'3" x 6'6")	15416	19716
610 x 1981 x 35mm (2'0" x 6'6")	15417	19717
533 x 1981 x 35mm (1'9" x 6'6")	15418 [1]	19718
457 x 1981 x 35mm (1'6" x 6'6")	15419 [1]	19719

Semi Solid

Door Size	Code	Code
926 x 2040 x 40mm Standard Metric	16029	01629
826 x 2040 x 40mm Standard Metric	16038	01638
726 x 2040 x 40mm Standard Metric	16037	01637
626 x 2040 x 40mm Standard Metric	16036	01636
526 x 2040 x 40mm Standard Metric	16035	01635
914 x 1981 x 35mm (3'0" x 6'6")	16080	01680
864 x 1981 x 35mm (2'10" x 6'6")	16077	-
838 x 1981 x 35mm (2'9" x 6'6")	16014	01605
762 x 1981 x 35mm (2'6" x 6'6")	16011	01604
686 x 1981 x 35mm (2'3" x 6'6")	16016	01603
610 x 1981 x 35mm (2'0" x 6'6")	16017	01602
533 x 1981 x 35mm (1'9" x 6'6")	-	01606
457 x 1981 x 35mm (1'6" x 6'6")	-	01601

Safe 'N' Sound

Door Size	Code	Code
926 x 2040 x 40mm Standard Metric	17729	12229
826 x 2040 x 40mm Standard Metric	17738	12238
726 x 2040 x 40mm Standard Metric	17737	12237
626 x 2040 x 40mm Standard Metric	17736	12236
526 x 2040 x 40mm Standard Metric	17735	12235
914 x 1981 x 35mm (3'0" x 6'6")	17780	12280
864 x 1981 x 35mm (2'10" x 6'6")	17777	-
838 x 1981 x 35mm (2'9" x 6'6")	17714	12214
762 x 1981 x 35mm (2'6" x 6'6")	17711	12211
686 x 1981 x 35mm (2'3" x 6'6")	17716	12216
610 x 1981 x 35mm (2'0" x 6'6")	17717	12217
533 x 1981 x 35mm (1'9" x 6'6")	17718 [1]	-
457 x 1981 x 35mm (1'6" x 6'6")	-	-

FD30 Fireshield

Door Size	Code	Code
926 x 2040 x 44mm Standard Metric	17829	23029
826 x 2040 x 44mm Standard Metric	17838	23038
726 x 2040 x 44mm Standard Metric	17837	23037
626 x 2040 x 44mm Standard Metric	17836	23036
526 x 2040 x 44mm Standard Metric	17835	23035
914 x 1981 x 44mm (3'0" x 6'6")	17880	23080
864 x 1981 x 44mm (2'10" x 6'6")	17877	-
838 x 1981 x 44mm (2'9" x 6'6")	17814	23014
813 x 2032 x 44mm (2'8" x 6'8")	17839	23039
762 x 1981 x 44mm (2'6" x 6'6")	17811	23011
711 x 1981 x 44mm (2'4" x 6'6")	17815	23015
686 x 1981 x 44mm (2'3" x 6'6")	17816	23016
610 x 1981 x 44mm (2'0" x 6'6")	17817	23017
533 x 1981 x 44mm (1'9" x 6'6")	17818 [1]	23018
457 x 1981 x 44mm (1'6" x 6'6")	17819 [1]	-

FD60 Firemaster

Door Size	Code	Code
926 x 2040 x 54mm Standard Metric	13238	13208
826 x 2040 x 54mm Standard Metric	13236	13206
726 x 2040 x 54mm Standard Metric	13233	13203
626 x 2040 x 54mm Standard Metric	13231	13201
914 x 1981 x 54mm (3'0" x 6'6")	13240	13210
838 x 1981 x 54mm (2'9" x 6'6")	13237	13207
813 x 2032 x 54mm (2'8" x 6'8")	13235	13205
762 x 1981 x 54mm (2'6" x 6'6")	13234	13204
686 x 1981 x 54mm (2'3" x 6'6")	13232	13202

4 Panel Smooth





[2] Two panels only.

In Stock

See P13

Option Plus

See P112

Technical Information

See P114

4 Panel Smooth

Standard Core

Door Size	Code
926 x 2040 x 40mm Standard Metric	13629
826 x 2040 x 40mm Standard Metric	13638
726 x 2040 x 40mm Standard Metric	13637
626 x 2040 x 40mm Standard Metric	13636
526 x 2040 x 40mm Standard Metric	13635 [2]
914 x 1981 x 35mm (3'0" x 6'6")	13680
864 x 1981 x 35mm (2'10" x 6'6")	13677
838 x 1981 x 35mm (2'9" x 6'6")	13614
813 x 2032 x 35mm (2'8" x 6'8")	13639
762 x 1981 x 35mm (2'6" x 6'6")	13611
711 x 1981 x 35mm (2'4" x 6'6")	13615
686 x 1981 x 35mm (2'3" x 6'6")	13616
610 x 1981 x 35mm (2'0" x 6'6")	13617
533 x 1981 x 35mm (1'9" x 6'6")	13618 [2]
457 x 1981 x 35mm (1'6" x 6'6")	13619 [2]

Semi Solid

Door Size	Code
926 x 2040 x 40mm Standard Metric	15229
826 x 2040 x 40mm Standard Metric	15238
726 x 2040 x 40mm Standard Metric	15237
626 x 2040 x 40mm Standard Metric	15236
526 x 2040 x 40mm Standard Metric	15235 [2]
914 x 1981 x 35mm (3'0" x 6'6")	15280
864 x 1981 x 35mm (2'10" x 6'6")	15277
838 x 1981 x 35mm (2'9" x 6'6")	15214
762 x 1981 x 35mm (2'6" x 6'6")	15211
686 x 1981 x 35mm (2'3" x 6'6")	15216
610 x 1981 x 35mm (2'0" x 6'6")	15217
533 x 1981 x 35mm (1'9" x 6'6")	15218 [2]
457 x 1981 x 35mm (1'6" x 6'6")	15219 [2]

Safe 'N' Sound

Door Size	Code
926 x 2040 x 40mm Standard Metric	15729
826 x 2040 x 40mm Standard Metric	15738
726 x 2040 x 40mm Standard Metric	15737
626 x 2040 x 40mm Standard Metric	15736
526 x 2040 x 40mm Standard Metric	15735 [2]
914 x 1981 x 35mm (3'0" x 6'6")	15780
864 x 1981 x 35mm (2'10" x 6'6")	15777
838 x 1981 x 35mm (2'9" x 6'6")	15714
762 x 1981 x 35mm (2'6" x 6'6")	15711
686 x 1981 x 35mm (2'3" x 6'6")	15716
610 x 1981 x 35mm (2'0" x 6'6")	15717
533 x 1981 x 35mm (1'9" x 6'6")	15718 [2]
457 x 1981 x 35mm (1'6" x 6'6")	15719 [2]

FD30 Fireshield

Door Size	Code
926 x 2040 x 44mm Standard Metric	30329
826 x 2040 x 44mm Standard Metric	30338
726 x 2040 x 44mm Standard Metric	30337
626 x 2040 x 44mm Standard Metric	30336
526 x 2040 x 44mm Standard Metric	30335 [2]
914 x 1981 x 44mm (3'0" x 6'6")	30380
864 x 1981 x 44mm (2'10" x 6'6")	30377
838 x 1981 x 44mm (2'9" x 6'6")	30314
813 x 2032 x 44mm (2'8" x 6'8")	30339
762 x 1981 x 44mm (2'6" x 6'6")	30311
711 x 1981 x 44mm (2'4" x 6'6")	30315
686 x 1981 x 44mm (2'3" x 6'6")	30316
610 x 1981 x 44mm (2'0" x 6'6")	30317
533 x 1981 x 44mm (1'9" x 6'6")	30318 [2]
457 x 1981 x 44mm (1'6" x 6'6")	30319 [2]

FD60 Firemaster

Door Size	Code
926 x 2040 x 54mm Standard Metric	13258
826 x 2040 x 54mm Standard Metric	13256
726 x 2040 x 54mm Standard Metric	13253
626 x 2040 x 54mm Standard Metric	13251
914 x 1981 x 54mm (3'0" x 6'6")	13260
838 x 1981 x 54mm (2'9" x 6'6")	13257
813 x 2032 x 54mm (2'8" x 6'8")	13255
762 x 1981 x 54mm (2'6" x 6'6")	13254
686 x 1981 x 54mm (2'3" x 6'6")	13252

4 Panel Textured





[2] Two Panels only.

In Stock

See P13

Option Plus

See P112

Technical Information

See P114

4 Panel Textured

Standard Core

Door Size	Code
926 x 2040 x 40mm Standard Metric	12629
864 x 2040 x 40mm Standard Metric	12678
826 x 2040 x 40mm Standard Metric	12638
726 x 2040 x 40mm Standard Metric	12637
626 x 2040 x 40mm Standard Metric	12636
526 x 2040 x 40mm Standard Metric	12635 [2]
914 x 1981 x 35mm (3'0" x 6'6")	12680
864 x 1981 x 35mm (2'10" x 6'6")	12677
838 x 1981 x 35mm (2'9" x 6'6")	12614
813 x 2032 x 35mm (2'8" x 6'8")	12639
762 x 1981 x 35mm (2'6" x 6'6")	12611
711 x 1981 x 35mm (2'4" x 6'6")	12615
686 x 1981 x 35mm (2'3" x 6'6")	12616
610 x 1981 x 35mm (2'0" x 6'6")	12617
533 x 1981 x 35mm (1'9" x 6'6")	12618 [2]
457 x 1981 x 35mm (1'6" x 6'6")	12619 [2]

Semi Solid

Door Size	Code
926 x 2040 x 40mm Standard Metric	11229
864 x 2040 x 40mm Standard Metric	11278
826 x 2040 x 40mm Standard Metric	11238
726 x 2040 x 40mm Standard Metric	11237
626 x 2040 x 40mm Standard Metric	11236
526 x 2040 x 40mm Standard Metric	11235 [2]
914 x 1981 x 35mm (3'0" x 6'6")	11280
864 x 1981 x 35mm (2'10" x 6'6")	11277
838 x 1981 x 35mm (2'9" x 6'6")	11214
762 x 1981 x 35mm (2'6" x 6'6")	11211
686 x 1981 x 35mm (2'3" x 6'6")	11216
610 x 1981 x 35mm (2'0" x 6'6")	11217
533 x 1981 x 35mm (1'9" x 6'6")	11218 [2]
457 x 1981 x 35mm (1'6" x 6'6")	11219 [2]

Safe 'N' Sound

Door Size	Code
926 x 2040 x 40mm Standard Metric	19629
864 x 2040 x 40mm Standard Metric	19678
826 x 2040 x 40mm Standard Metric	19638
726 x 2040 x 40mm Standard Metric	19637
626 x 2040 x 40mm Standard Metric	19636
526 x 2040 x 40mm Standard Metric	19635 [2]
914 x 1981 x 35mm (3'0" x 6'6")	19680
864 x 1981 x 35mm (2'10" x 6'6")	19677
838 x 1981 x 35mm (2'9" x 6'6")	19614
762 x 1981 x 35mm (2'6" x 6'6")	19611
686 x 1981 x 35mm (2'3" x 6'6")	19616
610 x 1981 x 35mm (2'0" x 6'6")	19617
533 x 1981 x 35mm (1'9" x 6'6")	19618 [2]
457 x 1981 x 35mm (1'6" x 6'6")	19619 [2]

FD30 Fireshield

Door Size	Code
926 x 2040 x 44mm Standard Metric	23729
864 x 2040 x 44mm Standard Metric	23778
826 x 2040 x 44mm Standard Metric	23738
726 x 2040 x 44mm Standard Metric	23737
626 x 2040 x 44mm Standard Metric	23736
526 x 2040 x 44mm Standard Metric	23735 [2]
914 x 1981 x 44mm (3'0" x 6'6")	23780
864 x 1981 x 44mm (2'10" x 6'6")	23777
838 x 1981 x 44mm (2'9" x 6'6")	23714
813 x 2032 x 44mm (2'8" x 6'8")	23739
711 x 1981 x 44mm (2'4" x 6'6")	23757
762 x 1981 x 44mm (2'6" x 6'6")	23711
686 x 1981 x 44mm (2'3" x 6'6")	23716
610 x 1981 x 44mm (2'0" x 6'6")	23717
533 x 1981 x 44mm (1'9" x 6'6")	23718 [2]
457 x 1981 x 44mm (1'6" x 6'6")	23719 [2]

FD60 Firemaster

Door Size	Code
926 x 2040 x 54mm Standard Metric	13268
826 x 2040 x 54mm Standard Metric	13266
726 x 2040 x 54mm Standard Metric	13263
626 x 2040 x 54mm Standard Metric	13261
914 x 1981 x 54mm (3'0" x 6'6")	13270
838 x 1981 x 54mm (2'9" x 6'6")	13267
813 x 2032 x 54mm (2'8" x 6'8")	13265
762 x 1981 x 54mm (2'6" x 6'6")	13264
686 x 1981 x 54mm (2'3" x 6'6")	13262

Bi-Fold

Door Size To suit opening size	Code
762 x 1981 x 35mm (2'6" x 6'6")	14867
610 x 1981 x 35mm (2'0" x 6'6")	14865

Replacement Bi-Fold Track & Fitting Pack

Door Size To suit opening size	Code
762 x 1981 x 35mm (2'6" x 6'6")	51122
610 x 1981 x 35mm (2'2" x 6'6")	43083

5 Panel Smooth



Standard Core

Door Size	5 Panel Smooth Code
826 x 2040 x 40mm Standard Metric	58138
726 x 2040 x 40mm Standard Metric	58137
626 x 2040 x 40mm Standard Metric	58136
864 x 1981 x 35mm (2'10" x 6'6")	58177
838 x 1981 x 35mm (2'9" x 6'6")	58114
762 x 1981 x 35mm (2'6" x 6'6")	58111
711 x 1981 x 35mm (2'4" x 6'6")	58115
686 x 1981 x 35mm (2'3" x 6'6")	58116
610 x 1981 x 35mm (2'0" x 6'6")	58117
533 x 1981 x 35mm (1'9" x 6'6")	58118
457 x 1981 x 35mm (1'6" x 6'6")	58119

FD30 Fireshield

Door Size	Code
826 x 2040 x 44mm Standard Metric	58438
726 x 2040 x 44mm Standard Metric	58437
626 x 2040 x 44mm Standard Metric	58436
864 x 1981 x 44mm (2'10" x 6'6")	58477
838 x 1981 x 44mm (2'9" x 6'6")	58414
762 x 1981 x 44mm (2'6" x 6'6")	58411
711 x 1981 x 44mm (2'4" x 6'6")	58415
686 x 1981 x 44mm (2'3" x 6'6")	58416
610 x 1981 x 44mm (2'0" x 6'6")	58419

FD60 Firemaster

Door Size	Code
914 x 1981 x 54mm (3'0" x 6'6")	58514
838 x 1981 x 54mm (2'9" x 6'6")	58511

In Stock

See P13

Option Plus

See P112

Technical Information

See P114

Stocking Policy

Green Tint Flashed items are available from stock on a 3 day lead-time from key order date, terms and conditions apply, see page 123 for further details.

6 Panel Smooth





[3] Three Panels only.

In Stock

See P13

Option Plus

See P112

Technical Information

See P114

6 Panel Smooth

Standard Core

Door Size	Code
926 x 2040 x 40mm Standard Metric	13529
826 x 2040 x 40mm Standard Metric	13538
726 x 2040 x 40mm Standard Metric	13537
626 x 2040 x 40mm Standard Metric	13536
526 x 2040 x 40mm Standard Metric	13535 [3]
914 x 1981 x 35mm (3'0" x 6'6")	13580
864 x 1981 x 35mm (2'10" x 6'6")	13577
838 x 1981 x 35mm (2'9" x 6'6")	13514
813 x 2032 x 35mm (2'8" x 6'8")	13539
762 x 1981 x 35mm (2'6" x 6'6")	13511
711 x 1981 x 35mm (2'4" x 6'6")	13515
686 x 1981 x 35mm (2'3" x 6'6")	13516
610 x 1981 x 35mm (2'0" x 6'6")	13517
533 x 1981 x 35mm (1'9" x 6'6")	13518 [3]
457 x 1981 x 35mm (1'6" x 6'6")	13519 [3]

Semi Solid

Door Size	Code
926 x 2040 x 40mm Standard Metric	21729
826 x 2040 x 40mm Standard Metric	21738
726 x 2040 x 40mm Standard Metric	21737
626 x 2040 x 40mm Standard Metric	21736
526 x 2040 x 40mm Standard Metric	21735 [3]
914 x 1981 x 35mm (3'0" x 6'6")	21780
864 x 1981 x 35mm (2'10" x 6'6")	21777
838 x 1981 x 35mm (2'9" x 6'6")	21714
762 x 1981 x 35mm (2'6" x 6'6")	21711
686 x 1981 x 35mm (2'3" x 6'6")	21716
610 x 1981 x 35mm (2'0" x 6'6")	21717
533 x 1981 x 35mm (1'9" x 6'6")	21718 [3]
457 x 1981 x 35mm (1'6" x 6'6")	21719 [3]

Safe 'N' Sound

Door Size	Code
926 x 2040 x 40mm Standard Metric	25429
826 x 2040 x 40mm Standard Metric	25438
726 x 2040 x 40mm Standard Metric	25437
626 x 2040 x 40mm Standard Metric	25436
526 x 2040 x 40mm Standard Metric	25435 [3]
914 x 1981 x 35mm (3'0" x 6'6")	25480
864 x 1981 x 35mm (2'10" x 6'6")	25477
838 x 1981 x 35mm (2'9" x 6'6")	25414
762 x 1981 x 35mm (2'6" x 6'6")	25411
686 x 1981 x 35mm (2'3" x 6'6")	25416
610 x 1981 x 35mm (2'0" x 6'6")	25417
533 x 1981 x 35mm (1'9" x 6'6")	25418 [3]
457 x 1981 x 35mm (1'6" x 6'6")	25419 [3]

FD30 Fireshield

Door Size	Code
926 x 2040 x 44mm Standard Metric	24029
826 x 2040 x 44mm Standard Metric	24038
726 x 2040 x 44mm Standard Metric	24037
626 x 2040 x 44mm Standard Metric	24036
526 x 2040 x 44mm Standard Metric	24035 [3]
914 x 1981 x 44mm (3'0" x 6'6")	24080
864 x 1981 x 44mm (2'10" x 6'6")	24077
838 x 1981 x 44mm (2'9" x 6'6")	24014
813 x 2032 x 44mm (2'8" x 6'8")	24039
762 x 1981 x 44mm (2'6" x 6'6")	24011
711 x 1981 x 44mm (2'4" x 6'6")	24057
686 x 1981 x 44mm (2'3" x 6'6")	24016
610 x 1981 x 44mm (2'0" x 6'6")	24017
533 x 1981 x 44mm (1'9" x 6'6")	24018 [3]
457 x 1981 x 44mm (1'6" x 6'6")	24019 [3]

FD60 Firemaster

Door Size	Code
926 x 2040 x 54mm Standard Metric	13278
826 x 2040 x 54mm Standard Metric	13276
726 x 2040 x 54mm Standard Metric	13273
626 x 2040 x 54mm Standard Metric	13271
914 x 1981 x 54mm (3'0" x 6'6")	13280
838 x 1981 x 54mm (2'9" x 6'6")	13277
813 x 2032 x 54mm (2'8" x 6'8")	13275
762 x 1981 x 54mm (2'6" x 6'6")	13274
686 x 1981 x 54mm (2'3" x 6'6")	13272

Bi-Fold

Door Size To suit opening size	Code
914 x 1981 x 35mm (3'0" x 6'6")	13368
762 x 1981 x 35mm (2'6" x 6'6")	13367
686 x 1981 x 35mm (2'3" x 6'6")	13366
610 x 1981 x 35mm (2'0" x 6'6")	13365

Replacement Bi-Fold Track & Fitting Pack

Door Size To suit opening size	Code
914 x 1981 x 35mm (3'0" x 6'6")	43081
762 x 1981 x 35mm (2'6" x 6'6")	51122
686 x 1981 x 35mm (2'3" x 6'6")	51123
610 x 1981 x 35mm (2'0" x 6'6")	43083

6 Panel Textured





[3] Three Panels only.

In Stock

See P13

Option Plus

See P112

Technical Information

See P114

Standard Core

6 Panel Textured

Door Size	Code
926 x 2040 x 40mm Standard Metric	12429
826 x 2040 x 40mm Standard Metric	12438
726 x 2040 x 40mm Standard Metric	12437
626 x 2040 x 40mm Standard Metric	12436
526 x 2040 x 40mm Standard Metric	12435 [3]
914 x 1981 x 35mm (3'0" x 6'6")	12480
864 x 1981 x 35mm (2'10" x 6'6")	12477
838 x 1981 x 35mm (2'9" x 6'6")	12414
813 x 2032 x 35mm (2'8" x 6'8")	12439
762 x 1981 x 35mm (2'6" x 6'6")	12411
711 x 1981 x 35mm (2'4" x 6'6")	12415
686 x 1981 x 35mm (2'3" x 6'6")	12416
610 x 1981 x 35mm (2'0" x 6'6")	12417
533 x 1981 x 35mm (1'9" x 6'6")	12418 [3]
457 x 1981 x 35mm (1'6" x 6'6")	12419 [3]

Semi Solid

Door Size	Code
926 x 2040 x 40mm Standard Metric	20329
826 x 2040 x 40mm Standard Metric	20338
726 x 2040 x 40mm Standard Metric	20337
626 x 2040 x 40mm Standard Metric	20336
526 x 2040 x 40mm Standard Metric	20335 [3]
914 x 1981 x 35mm (3'0" x 6'6")	20380
864 x 1981 x 35mm (2'10" x 6'6")	20377
838 x 1981 x 35mm (2'9" x 6'6")	20314
762 x 1981 x 35mm (2'6" x 6'6")	20311
610 x 1981 x 35mm (2'0" x 6'6")	20317
686 x 1981 x 35mm (2'3" x 6'6")	20316
533 x 1981 x 35mm (1'9" x 6'6")	20318 [3]
457 x 1981 x 35mm (1'6" x 6'6")	20319 [3]

Safe 'N' Sound

Door Size	Code
926 x 2040 x 40mm Standard Metric	23929
826 x 2040 x 40mm Standard Metric	23938
726 x 2040 x 40mm Standard Metric	23937
626 x 2040 x 40mm Standard Metric	23936
526 x 2040 x 40mm Standard Metric	23935 [3]
914 x 1981 x 35mm (3'0" x 6'6")	23980
864 x 1981 x 35mm (2'10" x 6'6")	23977
838 x 1981 x 35mm (2'9" x 6'6")	23914
762 x 1981 x 35mm (2'6" x 6'6")	23911
686 x 1981 x 35mm (2'3" x 6'6")	23916
610 x 1981 x 35mm (2'0" x 6'6")	23917
533 x 1981 x 35mm (1'9" x 6'6")	23918 [3]
457 x 1981 x 35mm (1'6" x 6'6")	23919 [3]

FD30 Fireshield

Door Size	Code
926 x 2040 x 44mm Standard Metric	23429
826 x 2040 x 44mm Standard Metric	23438
726 x 2040 x 44mm Standard Metric	23437
626 x 2040 x 44mm Standard Metric	23436
526 x 2040 x 44mm Standard Metric	23435 [3]
914 x 1981 x 44mm (3'0" x 6'6")	23480
864 x 1981 x 44mm (2'10" x 6'6")	23477
838 x 1981 x 44mm (2'9" x 6'6")	23414
813 x 2032 x 44mm (2'8" x 6'8")	23439
762 x 1981 x 44mm (2'6" x 6'6")	23411
711 x 1981 x 44mm (2'4" x 6'6")	23457
686 x 1981 x 44mm (2'3" x 6'6")	23416
610 x 1981 x 44mm (2'0" x 6'6")	23417
533 x 1981 x 44mm (1'9" x 6'6")	23418 [3]
457 x 1981 x 44mm (1'6" x 6'6")	23419 [3]

FD60 Firemaster

Door Size	Code
926 x 2040 x 54mm Standard Metric	13288
826 x 2040 x 54mm Standard Metric	13286
726 x 2040 x 54mm Standard Metric	13283
626 x 2040 x 54mm Standard Metric	13281
914 x 1981 x 54mm (3'0" x 6'6")	13291
838 x 1981 x 54mm (2'9" x 6'6")	13287
813 x 2032 x 54mm (2'8" x 6'8")	13285
762 x 1981 x 54mm (2'6" x 6'6")	13284
686 x 1981 x 54mm (2'3" x 6'6")	13282

Bi-Fold

Door Size To suit opening size	Code
914 x 1981 x 35mm (3'0" x 6'6")	14768
762 x 1981 x 35mm (2'6" x 6'6")	14767
686 x 1981 x 35mm (2'3" x 6'6")	14766
610 x 1981 x 35mm (2'0" x 6'6")	14765

Replacement Bi-Fold Track & Fitting Pack

Door Size To suit opening size	Code
914 x 1981 x 35mm (3'0" x 6'6")	43081
762 x 1981 x 35mm (2'6" x 6'6")	51122
686 x 1981 x 35mm (2'3" x 6'6")	51123
610 x 1981 x 35mm (2'0" x 6'6")	43083


5 Panel Half Light
Etched Glazed
P43



Moulded Glazed

If you've considered removing a wall but are worried that you'll miss the divide once it's gone, or keen to reinstate some sort of partition between two rooms, a glazed moulded door could be the answer.

Bathe your home in natural light, brighten dark corners and expand the feeling of space.

1 Panel Smooth Clear Glazed





1 Panel Clear Glazed

Door Size	Code
926 x 2040 x 40mm Standard Metric	67320
826 x 2040 x 40mm Standard Metric	67321
726 x 2040 x 40mm Standard Metric	67322
626 x 2040 x 40mm Standard Metric	67323
864 x 1981 x 35mm (2'10" x 6'6")	67316
838 x 1981 x 35mm (2'9" x 6'6")	67317
762 x 1981 x 35mm (2'6" x 6'6")	67318
686 x 1981 x 35mm (2'3" x 6'6")	67319



4 Light Clear Glazed

Door Size	Code
926 x 2040 x 40mm Standard Metric	72029
826 x 2040 x 40mm Standard Metric	72038
726 x 2040 x 40mm Standard Metric	72037
626 x 2040 x 40mm Standard Metric	72036
864 x 1981 x 35mm (2'10" x 6'6")	72077
838 x 1981 x 35mm (2'9" x 6'6")	72014
762 x 1981 x 35mm (2'6" x 6'6")	72011
686 x 1981 x 35mm (2'3" x 6'6")	72016


4 Light Clear Glazed





4 Light Clear Glazed FD30 Fireshield

Door Size	Code
926 x 2040 x 44mm Standard Metric	77329
826 x 2040 x 44mm Standard Metric	77338
838 x 1981 x 44mm (2'9" x 6'6")	77314
762 x 1981 x 44mm (2'6" x 6'6")	77311



1 Panel White Leaded Clear Glazed

Door Size	Code
926 x 2040 x 40mm Standard Metric	67304
826 x 2040 x 40mm Standard Metric	67305
726 x 2040 x 40mm Standard Metric	67306
626 x 2040 x 40mm Standard Metric	67307
864 x 1981 x 35mm (2'10" x 6'6")	67300
838 x 1981 x 35mm (2'9" x 6'6")	67301
762 x 1981 x 35mm (2'6" x 6'6")	67302
686 x 1981 x 35mm (2'3" x 6'6")	67303

1 Panel Leaded Clear Glazed





1 Panel Chrome Leaded Clear Glazed

Door Size	Code
926 x 2040 x 40mm Standard Metric	67312
826 x 2040 x 40mm Standard Metric	67313
726 x 2040 x 40mm Standard Metric	67314
626 x 2040 x 40mm Standard Metric	67315
864 x 1981 x 35mm (2'10" x 6'6")	67308
838 x 1981 x 35mm (2'9" x 6'6")	67309
762 x 1981 x 35mm (2'6" x 6'6")	67310
686 x 1981 x 35mm (2'3" x 6'6")	67311

Part M
See P115

Option Plus
See P112

Technical Information
See P114

Ladder Smooth Glazed

3 Light Clear Glazed



Door Size	Code
926 x 2040 x 40mm Standard Metric	75029
826 x 2040 x 40mm Standard Metric	75038
726 x 2040 x 40mm Standard Metric	75037
626 x 2040 x 40mm Standard Metric	75036
864 x 1981 x 35mm (2'10" x 6'6")	75077
838 x 1981 x 35mm (2'9" x 6'6")	75014
762 x 1981 x 35mm (2'6" x 6'6")	75011
686 x 1981 x 35mm (2'3" x 6'6")	75016

4 Light Clear Glazed



Door Size	Code
926 x 2040 x 40mm Standard Metric	75129
826 x 2040 x 40mm Standard Metric	75138
726 x 2040 x 40mm Standard Metric	75137
626 x 2040 x 40mm Standard Metric	75136
864 x 1981 x 35mm (2'10" x 6'6")	75177
838 x 1981 x 35mm (2'9" x 6'6")	75114
762 x 1981 x 35mm (2'6" x 6'6")	75111
686 x 1981 x 35mm (2'3" x 6'6")	75116

Vertical 5 Panel Textured Glazed



Half Light Clear Etched Glazed



Door Size	Code
926 x 2040 x 40mm Standard Metric	31104
826 x 2040 x 40mm Standard Metric	31105
726 x 2040 x 40mm Standard Metric	31106
864 x 1981 x 35mm (2'10" x 6'6")	31100
838 x 1981 x 35mm (2'9" x 6'6")	31101
762 x 1981 x 35mm (2'6" x 6'6")	31102
686 x 1981 x 35mm (2'3" x 6'6")	31103

1 Light Clear Etched Glazed



Door Size	Code
926 x 2040 x 40mm Standard Metric	71729
826 x 2040 x 40mm Standard Metric	71738
726 x 2040 x 40mm Standard Metric	71737
626 x 2040 x 40mm Standard Metric	71736
864 x 1981 x 35mm (2'10" x 6'6")	71777
838 x 1981 x 35mm (2'9" x 6'6")	71714
762 x 1981 x 35mm (2'6" x 6'6")	71711
686 x 1981 x 35mm (2'3" x 6'6")	71716

5 Panel Smooth Glazed



¾ Light Clear Glazed



Door Size	Code
826 x 2040 x 40mm Standard Metric	77838
726 x 2040 x 40mm Standard Metric	77837
626 x 2040 x 40mm Standard Metric	77836
864 x 1981 x 35mm (2'10" x 6'6")	77877
838 x 1981 x 35mm (2'9" x 6'6")	77814
762 x 1981 x 35mm (2'6" x 6'6")	77811
686 x 1981 x 35mm (2'3" x 6'6")	77816

5 Light Clear Glazed



Door Size	Code
826 x 2040 x 40mm Standard Metric	77938
726 x 2040 x 40mm Standard Metric	77937
626 x 2040 x 40mm Standard Metric	77936
864 x 1981 x 35mm (2'10" x 6'6")	77977
838 x 1981 x 35mm (2'9" x 6'6")	77914
762 x 1981 x 35mm (2'6" x 6'6")	77911
686 x 1981 x 35mm (2'3" x 6'6")	77916

Horizontal 4 Line Smooth Glazed





4 Line Clear Glazed

Door Size	Code
838 x 1981 x 35mm (2'9" x 6'6")	67324
762 x 1981 x 35mm (2'6" x 6'6")	67325
686 x 1981 x 35mm (2'3" x 6'6")	67326
610 x 1981 x 35mm (2'0" x 6'6")	67327



4 Line, 4 Light Clear Glazed

Door Size	Code
926 x 2040 x 40mm Standard Metric	75229
826 x 2040 x 40mm Standard Metric	75238
726 x 2040 x 40mm Standard Metric	75237
626 x 2040 x 40mm Standard Metric	75236
864 x 1981 x 35mm (2'10" x 6'6")	75277
838 x 1981 x 35mm (2'9" x 6'6")	75214
762 x 1981 x 35mm (2'6" x 6'6")	75211
686 x 1981 x 35mm (2'3" x 6'6")	75216


Horizontal 4 Line 4 Light Smooth Glazed





FD30 Fireshield 4 Line, 4 Light Clear Glazed

Door Size	Code
926 x 2040 x 44mm Standard Metric	77429
826 x 2040 x 44mm Standard Metric	77438
838 x 1981 x 44mm (2'9" x 6'6")	77414
762 x 1981 x 44mm (2'6" x 6'6")	77411




4 Line, Narrow Clear Glazed

Door Size	Code
838 x 1981 x 35mm (2'9" x 6'6")	67328
762 x 1981 x 35mm (2'6" x 6'6")	67329
686 x 1981 x 35mm (2'3" x 6'6")	67330
610 x 1981 x 35mm (2'0" x 6'6")	67331


Horizontal 4 Line Narrow Smooth Glazed





4 Line, Narrow Offset Clear Glazed

Door Size	Code
926 x 2040 x 40mm Standard Metric	76829
826 x 2040 x 40mm Standard Metric	76838
726 x 2040 x 40mm Standard Metric	76837
626 x 2040 x 40mm Standard Metric	76836
864 x 1981 x 35mm (2'10" x 6'6")	76877
838 x 1981 x 35mm (2'9" x 6'6")	76814
762 x 1981 x 35mm (2'6" x 6'6")	76811
686 x 1981 x 35mm (2'3" x 6'6")	76816



FD30 Fireshield 4 Line, Narrow Offset Clear Glazed

Door Size	Code
926 x 2040 x 44mm Standard Metric	77529
826 x 2040 x 44mm Standard Metric	77538
838 x 1981 x 44mm (2'9" x 6'6")	77514
762 x 1981 x 44mm (2'6" x 6'6")	77511

Part M
See P115


Option Plus
See P112

Technical Information
See P114

Ontario 10 Light Glazed




Ontario Smooth
10 Light Chrome Glazing Bars



Door Size	Code
826 x 2040 x 40mm Standard Metric	58840
726 x 2040 x 40mm Standard Metric	58838
626 x 2040 x 40mm Standard Metric	58836
526 x 2040 x 40mm Standard Metric	58834
864 x 1981 x 35mm (2'10" x 6'6")	58842
838 x 1981 x 35mm (2'9" x 6'6")	58841
762 x 1981 x 35mm (2'6" x 6'6")	58839
686 x 1981 x 35mm (2'3" x 6'6")	58837
610 x 1981 x 35mm (2'0" x 6'6")	58835

Ontario Textured
10 Light Chrome Glazing Bars



Door Size	Code
826 x 2040 x 40mm Standard Metric	92448
726 x 2040 x 40mm Standard Metric	92447
626 x 2040 x 40mm Standard Metric	92446
526 x 2040 x 40mm Standard Metric	92445
864 x 1981 x 35mm (2'10" x 6'6")	92487
838 x 1981 x 35mm (2'9" x 6'6")	92464
762 x 1981 x 35mm (2'6" x 6'6")	92461
686 x 1981 x 35mm (2'3" x 6'6")	92467
610 x 1981 x 35mm (2'0" x 6'6")	92465

Manitoba 6 Light Textured Glazed



Manitoba Textured
6 Light Chrome Glazing Bars



Door Size	Code
826 x 2040 x 40mm Standard Metric	92248
726 x 2040 x 40mm Standard Metric	92247
626 x 2040 x 40mm Standard Metric	92246
864 x 1981 x 35mm (2'10" x 6'6")	92287
838 x 1981 x 35mm (2'9" x 6'6")	92264
762 x 1981 x 35mm (2'6" x 6'6")	92261
686 x 1981 x 35mm (2'3" x 6'6")	92263

Part M
See P115


Option Plus
See P112

Technical Information
See P114

Manhattan 6 Light Smooth Glazed




6 Light White Leading



Door Size	Code
926 x 2040 x 40mm Standard Metric	60525
826 x 2040 x 40mm Standard Metric	60526
726 x 2040 x 40mm Standard Metric	60527
626 x 2040 x 40mm Standard Metric	60528
864 x 1981 x 35mm (2'10" x 6'6")	60521
838 x 1981 x 35mm (2'9" x 6'6")	60522
762 x 1981 x 35mm (2'6" x 6'6")	60523
686 x 1981 x 35mm (2'3" x 6'6")	60524

6 Light Chrome Leading




Door Size	Code
926 x 2040 x 40mm Standard Metric	65167
826 x 2040 x 40mm Standard Metric	65168
726 x 2040 x 40mm Standard Metric	65169
626 x 2040 x 40mm Standard Metric	65170
864 x 1981 x 35mm (2'10" x 6'6")	65163
838 x 1981 x 35mm (2'9" x 6'6")	65164
762 x 1981 x 35mm (2'6" x 6'6")	65165
686 x 1981 x 35mm (2'3" x 6'6")	65166

Manhattan 10 Light Smooth Glazed




10 Light White Leading



Door Size	Code
926 x 2040 x 40mm Standard Metric	59905
826 x 2040 x 40mm Standard Metric	59906
726 x 2040 x 40mm Standard Metric	59907
626 x 2040 x 40mm Standard Metric	59908
864 x 1981 x 35mm (2'10" x 6'6")	59901
838 x 1981 x 35mm (2'9" x 6'6")	59902
762 x 1981 x 35mm (2'6" x 6'6")	59903
686 x 1981 x 35mm (2'3" x 6'6")	59904

10 Light Chrome Leading



Door Size	Code
926 x 2040 x 40mm Standard Metric	65089
826 x 2040 x 40mm Standard Metric	65090
726 x 2040 x 40mm Standard Metric	65091
626 x 2040 x 40mm Standard Metric	65092
864 x 1981 x 35mm (2'10" x 6'6")	65085
838 x 1981 x 35mm (2'9" x 6'6")	65086
762 x 1981 x 35mm (2'6" x 6'6")	65087
686 x 1981 x 35mm (2'3" x 6'6")	65088

Part M
See P115

Option Plus
See P112

Technical Information
See P114

Manhattan 6 Light Textured Glazed



6 Light White Leading



Door Size	Code
926 x 2040 x 40mm Standard Metric	59993
826 x 2040 x 40mm Standard Metric	59994
726 x 2040 x 40mm Standard Metric	59995
626 x 2040 x 40mm Standard Metric	59996
864 x 1981 x 35mm (2'10" x 6'6")	59989
838 x 1981 x 35mm (2'9" x 6'6")	59990
762 x 1981 x 35mm (2'6" x 6'6")	59991
686 x 1981 x 35mm (2'3" x 6'6")	59992

6 Light Chrome Leading



Door Size	Code
926 x 2040 x 40mm Standard Metric	65139
826 x 2040 x 40mm Standard Metric	65140
726 x 2040 x 40mm Standard Metric	65141
626 x 2040 x 40mm Standard Metric	65142
864 x 1981 x 35mm (2'10" x 6'6")	65135
838 x 1981 x 35mm (2'9" x 6'6")	65136
762 x 1981 x 35mm (2'6" x 6'6")	65137
686 x 1981 x 35mm (2'3" x 6'6")	65138

Manhattan 10 Light Textured Glazed



10 Light White Leading



Door Size	Code
926 x 2040 x 40mm Standard Metric	59913
826 x 2040 x 40mm Standard Metric	59914
726 x 2040 x 40mm Standard Metric	59915
626 x 2040 x 40mm Standard Metric	59916
864 x 1981 x 35mm (2'10" x 6'6")	59909
838 x 1981 x 35mm (2'9" x 6'6")	59910
762 x 1981 x 35mm (2'6" x 6'6")	59911
686 x 1981 x 35mm (2'3" x 6'6")	59912

10 Light Chrome Leading



Door Size	Code
926 x 2040 x 40mm Standard Metric	65097
826 x 2040 x 40mm Standard Metric	65098
726 x 2040 x 40mm Standard Metric	65099
626 x 2040 x 40mm Standard Metric	65100
864 x 1981 x 35mm (2'10" x 6'6")	65093
838 x 1981 x 35mm (2'9" x 6'6")	65094
762 x 1981 x 35mm (2'6" x 6'6")	65095
686 x 1981 x 35mm (2'3" x 6'6")	65096

Part M
See P115

Option Plus
See P112

Technical Information
See P114



Paint Grade Plus
P51

Paint Grade

The Premdor interior Paint Grade range has developed to become a firm trade favourite.

When contract budgets are tight and minimum installation times are paramount, this range has been found to be the ideal solution.



Paint Match

Pirate Black,
Pantone 19-4305

Door shown painted for illustration purposes only.

Paint Grade Plus
P51



Paint Match
Dulux Brilliant White.

Door shown painted for illustration purposes only.

Paint Grade Plus



Paint Grade Plus Lipped



Standard Core

Door Size	Paint Grade Plus Code	Paint Grade Plus Lipped Code
926 x 2040 x 40mm Standard Metric	13129	35731
826 x 2040 x 40mm Standard Metric	13138	35738
726 x 2040 x 40mm Standard Metric	13137	35737
626 x 2040 x 40mm Standard Metric	13136	35736
526 x 2040 x 40mm Standard Metric	13135	35735
864 x 1981 x 35mm (2'10" x 6'6")	13177	35777
838 x 1981 x 35mm (2'9" x 6'6")	13114	35714
813 x 2032 x 35mm (2'8" x 6'8")	13139	35739
762 x 1981 x 35mm (2'6" x 6'6")	13111	35711
711 x 1981 x 35mm (2'4" x 6'6")	13115	35715
686 x 1981 x 35mm (2'3" x 6'6")	13116	35716
610 x 1981 x 35mm (2'0" x 6'6")	13117	35717
533 x 1981 x 35mm (1'9" x 6'6")	13118	35718
457 x 1981 x 35mm (1'6" x 6'6")	13119	35719
381 x 1981 x 35mm (1'3" x 6'6")	13120	35720
610 x 1829 x 35mm (2'0" x 6'0")	13124	35724

ExtraCore

Door Size	Code
838 x 1981 x 35mm (2'9" x 6'6")	13180
813 x 2032 x 35mm (2'8" x 6'8")	13187
762 x 1981 x 35mm (2'6" x 6'6")	13181
686 x 1981 x 35mm (2'3" x 6'6")	13182
610 x 1981 x 35mm (2'0" x 6'6")	13183
533 x 1981 x 35mm (1'9" x 6'6")	13184
457 x 1981 x 35mm (1'6" x 6'6")	13185
381 x 1981 x 35mm (1'3" x 6'6")	13186

FD30 Fireshield

Door Size	Code	Code
926 x 2040 x 44mm Standard Metric	23129	36929
826 x 2040 x 44mm Standard Metric	23138	36938
726 x 2040 x 44mm Standard Metric	23137	36937
626 x 2040 x 44mm Standard Metric	23136	36936
526 x 2040 x 44mm Standard Metric	23135	36935
426 x 2040 x 44mm Standard Metric	23134	36934
914 x 1981 x 44mm (3'0" x 6'6")	23155	36955
864 x 1981 x 44mm (2'10" x 6'6")	23177	36977
838 x 1981 x 44mm (2'9" x 6'6")	23114	36914
813 x 2032 x 44mm (2'8" x 6'8")	23139	36939
762 x 1981 x 44mm (2'6" x 6'6")	23111	36911
711 x 1981 x 44mm (2'4" x 6'6")	23115	36967
686 x 1981 x 44mm (2'3" x 6'6")	23116	36916
610 x 1981 x 44mm (2'0" x 6'6")	23117	36917
533 x 1981 x 44mm (1'9" x 6'6")	23118	36918
457 x 1981 x 44mm (1'6" x 6'6")	23119	36919

FD60 Firemaster

Door Size	Code
926 x 2040 x 54mm Standard Metric	23193
826 x 2040 x 54mm Standard Metric	23192
726 x 2040 x 54mm Standard Metric	23191
626 x 2040 x 54mm Standard Metric	23190
838 x 1981 x 54mm (2'9" x 6'6")	23183
813 x 2032 x 54mm (2'8" x 6'8")	23182
762 x 1981 x 54mm (2'6" x 6'6")	23181
686 x 1981 x 54mm (2'3" x 6'6")	23180

In Stock

See P13

Option Plus

See P112

Technical Information

See P114

Stocking Policy

Green Tint Flashed items are available from stock on a 3 day lead-time from key order date, terms and conditions apply, see page 123 for further details.

Paint Grade Popular Lipped



Standard Core

Door Size	Code
926 x 2040 x 40mm Standard Metric	14131
826 x 2040 x 40mm Standard Metric	14138
726 x 2040 x 40mm Standard Metric	14137
626 x 2040 x 40mm Standard Metric	14136
526 x 2040 x 40mm Standard Metric	14135
426 x 2040 x 40mm Standard Metric	14134
914 x 1981 x 35mm (3'0" x 6'6")	14155
864 x 1981 x 35mm (2'10" x 6'6")	14177
838 x 1981 x 35mm (2'9" x 6'6")	14114
813 x 2032 x 35mm (2'8" x 6'8")	14139
762 x 1981 x 35mm (2'6" x 6'6")	14111
711 x 1981 x 35mm (2'4" x 6'6")	14115
686 x 1981 x 35mm (2'3" x 6'6")	14116
610 x 1981 x 35mm (2'0" x 6'6")	14117
533 x 1981 x 35mm (1'9" x 6'6")	14118
457 x 1981 x 35mm (1'6" x 6'6")	14119
381 x 1981 x 35mm (1'3" x 6'6")	14120

40mm Thick

Door Size	Code
838 x 1981 x 40mm (2'9" x 6'6")	14129
813 x 2032 x 40mm (2'8" x 6'8")	14130
762 x 1981 x 40mm (2'6" x 6'6")	14128
686 x 1981 x 40mm (2'3" x 6'6")	14127
610 x 1981 x 40mm (2'0" x 6'6")	14126
533 x 1981 x 40mm (1'9" x 6'6")	14122
457 x 1981 x 40mm (1'6" x 6'6")	14121

FD30 Fireshield

Door Size	Code
926 x 2040 x 44mm Standard Metric	22129
826 x 2040 x 44mm Standard Metric	22138
726 x 2040 x 44mm Standard Metric	22137
626 x 2040 x 44mm Standard Metric	22136
526 x 2040 x 44mm Standard Metric	22135
426 x 2040 x 44mm Standard Metric	22134
914 x 1981 x 44mm (3'0" x 6'6")	22155
864 x 1981 x 44mm (2'10" x 6'6")	22177
838 x 1981 x 44mm (2'9" x 6'6")	22114
813 x 2032 x 44mm (2'8" x 6'8")	22139
762 x 1981 x 44mm (2'6" x 6'6")	22111
711 x 1981 x 44mm (2'4" x 6'6")	22167
686 x 1981 x 44mm (2'3" x 6'6")	22116
610 x 1981 x 44mm (2'0" x 6'6")	22117
533 x 1981 x 44mm (1'9" x 6'6")	22118
457 x 1981 x 44mm (1'6" x 6'6")	22119

FD60 Firemaster

Door Size	Code
926 x 2040 x 54mm Standard Metric	17629
826 x 2040 x 54mm Standard Metric	17638
726 x 2040 x 54mm Standard Metric	17637
626 x 2040 x 54mm Standard Metric	17636
838 x 1981 x 54mm (2'9" x 6'6")	17614
813 x 2032 x 54mm (2'8" x 6'8")	17639
762 x 1981 x 54mm (2'6" x 6'6")	17611
686 x 1981 x 54mm (2'3" x 6'6")	17616

In Stock

See P13

Option Plus

See P112

Technical Information

See P114

Stocking Policy

Green Tint Flashed items are available from stock on a 3 day lead-time from key order date, terms and conditions apply, see page 123 for further details.

External Flush F1X



Standard Core

Door Size	External Flush F1X Code	External Flush F2X* Code	External Flush F4X* Code
826 x 2040 x 44mm Standard Metric	21138	-	-
726 x 2040 x 44mm Standard Metric	21137	-	-
807 x 2000 x 44mm Standard Metric	21148	21248	21448
838 x 1981 x 44mm (2'9" x 6'6")	21114	21214	21414
813 x 2032 x 44mm (2'8" x 6'8")	21139	21239	21439
762 x 1981 x 44mm (2'6" x 6'6")	21111	21211	21411
686 x 1981 x 44mm (2'3" x 6'6")	21116	-	-
610 x 1981 x 44mm (2'0" x 6'6")	21117	-	-

FD30 Fireshield

Door Size	Code	Code	Code
926 x 2040 x 44mm Standard Metric	22329	-	-
826 x 2040 x 44mm Standard Metric	22338	-	-
726 x 2040 x 44mm Standard Metric	22337	-	-
807 x 2000 x 44mm Standard Metric	22348	22463	22471
914 x 1981 x 44mm (3'0" x 6'6")	22355	-	-
864 x 1981 x 44mm (2'10" x 6'6")	22377	-	-
838 x 1981 x 44mm (2'9" x 6'6")	22314	22460	22468
813 x 2032 x 44mm (2'8" x 6'8")	22339	22461	22469
762 x 1981 x 44mm (2'6" x 6'6")	22311	22462	22470
686 x 1981 x 44mm (2'3" x 6'6")	22316	-	-

External Flush F2X



Aperture dimensions to suit door size

Door Size		
F2X		
807 x 2000mm Standard Metric	553mm	502mm
838 x 1981mm (2'9" x 6'6")	584mm	483mm
813 x 2032mm (2'8" x 6'8")	559mm	533mm
762 x 1981mm (2'6" x 6'6")	508mm	483mm

Door Size		
F4X		
807 x 2000mm Standard Metric	553mm	806mm
838 x 1981mm (2'9" x 6'6")	584mm	787mm
813 x 2032mm (2'8" x 6'8")	559mm	838mm
762 x 1981mm (2'6" x 6'6")	508mm	787mm

External Flush F4X



* F2X and F4X Standard Core doors are supplied un-glazed.

In Stock

See P13

Option Plus

See P112

Technical Information

See P114



American White Oak Veneer 18G P59



Glazed Fire Doors

A fire door can often be the last barrier between you and a blaze that could end up saving your life.

To ensure you are protected Masonite in the UK manufacture a varied selection of styles of interior FD30 and FD60 solid and glazed fire doors to suit all tastes, whatever your interior design style.

For clear advice on fire doors, and a free-to-download ‘Best Practice Guide’ to selecting, installing, using and maintaining fire doors, please visit **firedoors.bwf.org.uk**

Flush Glazed Options

Flush glazed fire doors in 3 easy steps.

1. Choose your door and size

Where applicable select door, size and design from our Portfolio, Standard Veneer and Paint Grade ranges.

2. Choose your glazing design

Select a glazing option from the designs shown to the right.

3. Choose your glass type

From the table, select the glass type required.

Style Code	Aperture Dimensions	Top Margin	Side Margin	35mm NFR Clear Glazed (non-fire rated)	FD30 Clear Wired Glazed	FD30 Clear Glazed	FD30 Obscure Glazed
				Available On Portfolio Solid Core Only	Available	Available	Available
1G	450 x 450mm	127mm	‡	✓	✓	✓	✓
3G	150 x 700mm	127mm	127mm	✓	✓	✓	✓
7G	150 x 914mm	127mm	127mm	✓	✓	✓	✓
8G§	508 x 914mm	127mm	‡	✓	✓	✓	✓
10G	245 x 245mm x 5no	127mm	‡	✓	✓	✓	✓
16G	150 x 775mm top / 700mm bottom	127mm	127mm	✓	✓	✓	✓
18G	150 x 1150mm	406mm	127mm	✓	✓	✓	✓
19G	400 x 1654mm[1]	127mm	‡	✓	✓	✓	-
19G	508 x 1654mm[2]	127mm	‡	✓	✓	✓	-
20G	150 x 1440mm	127mm	127mm	✓	✓	✓	✓
21G	150 x 775mm top / 150 x 450mm bottom	127mm	127mm	✓	✓	✓	✓
22G	245 x 245mm x 4no	#	‡	✓	✓	✓	✓
23G	200 x 400mm x 3no	#	‡	✓	✓	✓	✓
24G	400 x 200mm x 3no	#	‡	✓	✓	✓	✓
25G	150 x 1440mm	#	127mm	✓	✓	✓	✓
26G	245 x 245mm x 4no	#	127mm	✓	✓	✓	✓
27G	200 x 300mm x 4no	#	127mm	✓	✓	✓	✓
28G	200 x 400mm x 3no	#	127mm	✓	✓	✓	✓
29G	150 x 1440mm	#	‡	✓	✓	✓	✓
30G	150 x 1150mm (Central)	406mm	Equal	✓	✓	✓	✓
50R¥	500 x 300 x 4no	#	127mm	✓	-	-	-


Appropriate styles adhere to Part B and Part M of the Building Regulations, making them ideal for communal areas where mobility could be an issue.

For pricing please contact your local distributor or the sales office on:


0844 209 0008

* Glazing is an additional cost to the door slab.
¥ 50R design recommended for domestic use only
‡ Side margin variable according to door width
# Top margin variable depending on the height of the door
§ Not available in doors less than 762mm wide
[1] 610-686mm widths
[2] 726-926mm widths
30 Fireshield FD30 fire rated
60 Firemaster FD60 fire rated
Part M Mobility


Please note 35mm NFR clear glazed doors are non-fire rated.




1G 30 60




3G 30 60




7G 30 60




8G 30 60




10G 30 60




16G 30 60

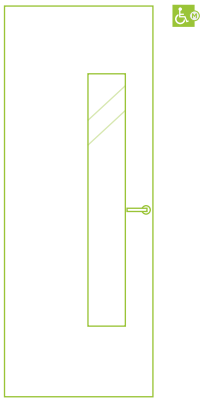


18G 30 60




19G 30




20G 30

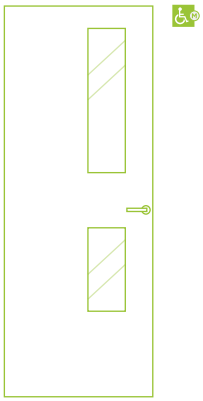


21G 30 60




22G 30 60




23G 30 60




24G 30 60




25G 30




26G 30 60




27G 30 60




28G 30 60



29G 30



30G 30 60




50R

Popular styles and sizes coded for ease of ordering.

Oak Vertical FD30 Glazed





FD30 Fireshield Wired Glazed 16G

Door Size	Code
926 x 2040 x 44mm Standard Metric	66217
826 x 2040 x 44mm Standard Metric	66218
838 x 1981 x 44mm (2'9" x 6'6")	66216
762 x 1981 x 44mm (2'6" x 6'6")	66215



FD30 Fireshield Clear Glazed 16G


Door Size	Code
926 x 2040 x 44mm Standard Metric	66214
826 x 2040 x 44mm Standard Metric	66213
838 x 1981 x 44mm (2'9" x 6'6")	66212
762 x 1981 x 44mm (2'6" x 6'6")	66211

Option Plus
See P112

Technical Information
See P114

Part M
See P115

Further designs are available, please refer to page 57 to view the full range.

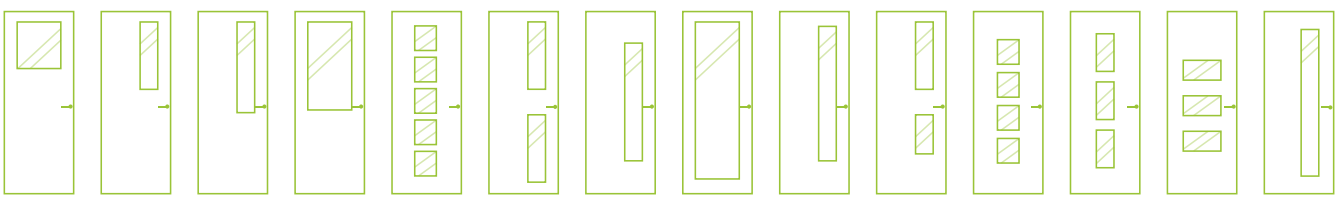


European Ash FD30 Glazed



American White Oak FD30 Glazed




FD30 Fireshield Wired Glazed 16G



Door Size	Code
926 x 2040 x 44mm Standard Metric	27003
826 x 2040 x 44mm Standard Metric	27004
838 x 1981 x 44mm (2'9" x 6'6")	27002
762 x 1981 x 44mm (2'6" x 6'6")	27001

FD30 Fireshield Wired Glazed 16G



Door Size	Code
926 x 2040 x 44mm Standard Metric	25303
826 x 2040 x 44mm Standard Metric	25304
838 x 1981 x 44mm (2'9" x 6'6")	25302
762 x 1981 x 44mm (2'6" x 6'6")	25301

FD30 Fireshield Clear Glazed 16G




Door Size	Code
926 x 2040 x 44mm Standard Metric	26993
826 x 2040 x 44mm Standard Metric	26992
838 x 1981 x 44mm (2'9" x 6'6")	26991
762 x 1981 x 44mm (2'6" x 6'6")	26990

FD30 Fireshield Clear Glazed 16G




Door Size	Code
926 x 2040 x 44mm Standard Metric	25293
826 x 2040 x 44mm Standard Metric	25292
838 x 1981 x 44mm (2'9" x 6'6")	25291
762 x 1981 x 44mm (2'6" x 6'6")	25290

FD30 Fireshield Wired Glazed 18G



Door Size	Code
926 x 2040 x 44mm Standard Metric	27007
826 x 2040 x 44mm Standard Metric	27008
838 x 1981 x 44mm (2'9" x 6'6")	27006
762 x 1981 x 44mm (2'6" x 6'6")	27005

FD30 Fireshield Wired Glazed 18G



Door Size	Code
926 x 2040 x 44mm Standard Metric	25307
826 x 2040 x 44mm Standard Metric	25308
838 x 1981 x 44mm (2'9" x 6'6")	25306
762 x 1981 x 44mm (2'6" x 6'6")	25305

FD30 Fireshield Clear Glazed 18G



Door Size	Code
926 x 2040 x 44mm Standard Metric	26997
826 x 2040 x 44mm Standard Metric	26996
838 x 1981 x 44mm (2'9" x 6'6")	26995
762 x 1981 x 44mm (2'6" x 6'6")	26994

FD30 Fireshield Clear Glazed 18G



Door Size	Code
926 x 2040 x 44mm Standard Metric	25297
826 x 2040 x 44mm Standard Metric	25296
838 x 1981 x 44mm (2'9" x 6'6")	25295
762 x 1981 x 44mm (2'6" x 6'6")	25294

Popular Paint Grade FD30 Glazed Lipped



Popular styles and sizes coded for ease of ordering.

FD30 Fireshield Clear Glazed 1G



Door Size	Code
926 x 2040 x 44mm Standard Metric	69703
826 x 2040 x 44mm Standard Metric	69702
838 x 1981 x 44mm (2'9" x 6'6")	69701
762 x 1981 x 44mm (2'6" x 6'6")	69700

FD30 Fireshield Wired Glazed 1G



Door Size	Code
926 x 2040 x 44mm Standard Metric	22262
826 x 2040 x 44mm Standard Metric	22261
838 x 1981 x 44mm (2'9" x 6'6")	22264
762 x 1981 x 44mm (2'6" x 6'6")	22263

FD30 Fireshield Clear Glazed 3G



Door Size	Code
926 x 2040 x 44mm Standard Metric	69707
826 x 2040 x 44mm Standard Metric	69706
838 x 1981 x 44mm (2'9" x 6'6")	69705
762 x 1981 x 44mm (2'6" x 6'6")	69704

FD30 Fireshield Wired Glazed 3G



Door Size	Code
926 x 2040 x 44mm Standard Metric	22278
826 x 2040 x 44mm Standard Metric	22279
838 x 1981 x 44mm (2'9" x 6'6")	22277
762 x 1981 x 44mm (2'6" x 6'6")	22276

FD30 Fireshield Clear Glazed 16G



Door Size	Code
926 x 2040 x 44mm Standard Metric	69711
826 x 2040 x 44mm Standard Metric	69710
838 x 1981 x 44mm (2'9" x 6'6")	69709
762 x 1981 x 44mm (2'6" x 6'6")	69708

FD30 Fireshield Wired Glazed 16G




Door Size	Code
926 x 2040 x 44mm Standard Metric	22286
826 x 2040 x 44mm Standard Metric	22287
838 x 1981 x 44mm (2'9" x 6'6")	22285
762 x 1981 x 44mm (2'6" x 6'6")	22284

FD30 Fireshield Clear Glazed 18G



Door Size	Code
926 x 2040 x 44mm Standard Metric	69715
826 x 2040 x 44mm Standard Metric	69714
838 x 1981 x 44mm (2'9" x 6'6")	69713
762 x 1981 x 44mm (2'6" x 6'6")	69712

FD30 Fireshield Wired Glazed 18G




Door Size	Code
926 x 2040 x 44mm Standard Metric	22269
826 x 2040 x 44mm Standard Metric	22268
838 x 1981 x 44mm (2'9" x 6'6")	22267
762 x 1981 x 44mm (2'6" x 6'6")	22266

Further designs are available, please refer to page 57 to view the full range.



Moulded M4G



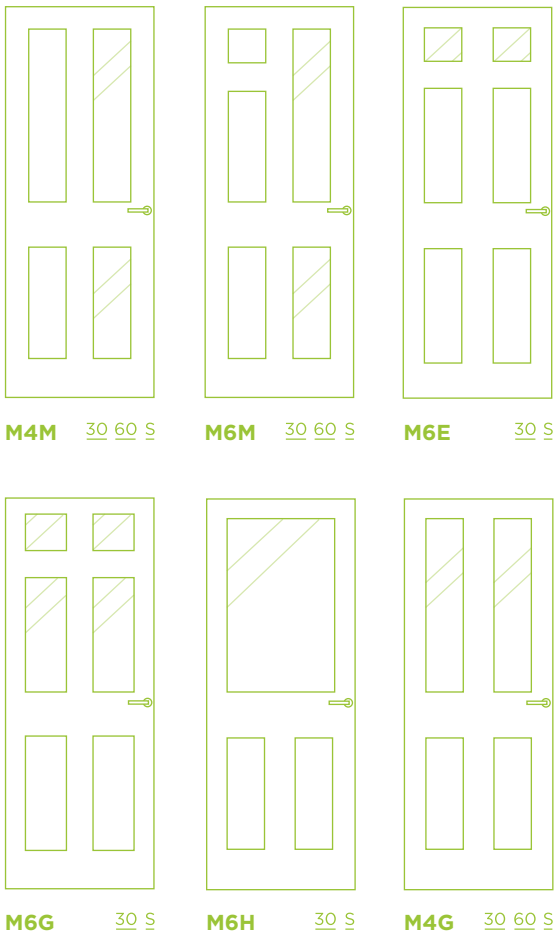

- All designs shown are available as FD30 fire doors and Safe 'N' Sound (non-fire rated) core constructions.
- FD60 fire doors available for M4M, M6M and M4G designs.
- Glazed FD30 fire doors are supplied with clear unwired fire rated glass fitted as standard. Wired option also available upon request.
- Obscure glass option available on Safe 'N' Sound doors only.
- Other glazing styles available upon request.
- Primed timber glazing cassette, and bead (foil wrapped MDF) as standard.
- White base coated textured or smooth moulded panel facings.

30 Fireshield FD30 fire rated
60 Firemaster FD60 fire rated
S Safe 'N' Sound (non fire rated)

Part M

See P115

Option Plus

See P112

Technical Information

See P114

For pricing and availability, please contact our sales office: 0844 209 0008

Note: Fire door performance is only guaranteed if the overall fire doorset assembly is correctly installed and maintained throughout the product's lifecycle.





Door Slab and Components or a Complete Doorset Solution?

What's the difference?

Time to find out more.....

With Premdor's complete doorset solutions...

YOU'RE ALL SET

PREMDOR®

DOORSETS

The difference between choosing a door slab and components versus a complete doorset solution.

A door slab needs to be installed into a compatible frame, complete with its essential ironmongery, and other components such as intumescent protection to ensure performance in the event of a fire.

A complete doorset solution combines all the essential components from door frame, ironmongery and intumescent seals (for fire doorsets) into one complete, factory-assembled product, delivered directly from one manufacturer.

The Premdor complete doorset solution is tested as a complete system and to the required specification, taking the time and effort out of separately sourcing individual components.



Secured by Design accreditation.

More peace of mind.

Repeatable complete installations

Reducing installation issues and snagging costs, more cost effective.

Third-party certification

More layers of assurance.



Everything supplied, ready to go.

Less time sourcing compatible and certificated components.

With Premdor's complete doorset solutions...

YOU'RE ALL SET

PREMDOR®

DOORSETS

Complete doorset solutions that do more.

The Power of PREMDOR

Premdor draws on almost a century of global manufacturing expertise from across the Masonite Group. We specialise in fire and non-fire doorsets and our offer is designed to provide stakeholders with robust assurance that the heavy lifting is already done for you.

Our complete doorset solutions are:

✔ Proven:

We only produce fire doorset solutions that are third party certificated to offer layers of traceability and assurance to our stakeholders. We conduct our testing on product samples that are manufactured under independent third party witness controls.

- **Transparent and comprehensive third party certification**
- **Enhanced assurance and traceability**

✔ Fast:

Our complete doorset solutions simplify and speed up installations by combining all components meaning a competent person can install our SpeedSet Doorsets in under 30 minutes*.

- **Install in under 30 minutes***
- **Helps with project deadlines**

✔ Flexible:

Our SpeedSet Interior Doorset adjustable linings and hinges allow easy modification to address variations in wall thickness and wall aperture variation you may encounter on site, ensuring a precise fit and efficient installation.

- **Adaptable product features**
- **Simplify complicated installations**

✔ Easy:

Remove guesswork from your installations with doorset solutions that combine components into one complete system.

- **Repeatable complete installations**
- **Reducing issues and cost**

✔ Safe and Secure:

Have more confidence in the knowledge that our SoundSecure Entrance Doorsets are supported by primary test evidence and independent third party certification schemes, as well as being Secured by Design accredited, offering an enhanced safety and security solution for residents.

- **Third-party certification**
- **More confident decisions**
- **More peace of mind**

* in a controlled environment.

PREMDOR®

SPEEDSET INTERIOR DOORSETS

YOU'RE ALL SET

The SpeedSet Interior Doorset is designed for fast installation, allowing each doorset to be installed in under 30 minutes by a competent person.*

The doorset lining is adjustable, allowing easy modification for variation within a given wall thickness to ensure a precise fit and efficient installation.

* in a controlled environment.



PREMDOR®

COMMUNAL DOORSETS

YOU'RE ALL SET

The Solid Rebated Communal Doorset is a timber framed internal doorset associated with the internal communal areas of busy buildings.

The communal doorset is available as an FD30 or FD60 rating. Both fire doorsets come with intumescent and smoke seals pre-installed within the frame. A non-fire doorset option is also available.



PREMDOR®

SOUNDSECURE ENTRANCE DOORSETS

YOU'RE ALL SET

The SoundSecure Entrance Doorset offers outstanding fire, security, smoke leakage and sound reduction properties, making it ideal for the complex performance demands of apartment entrances.

Supplied as either FD30 or FD60 rated fire doorsets, the SoundSecure is independently certified and tested within the Certifire and Certisecure third party certification schemes, as well as being Secured by Design accredited.



PREMDOR®

INTEGRAL GARAGE DOORSETS

YOU'RE ALL SET

Doors within integral garages are classed as an entry-point into a property so need to be as secure as any exterior door.

The Integral Garage Doorset provides a practical solution for entrances to the home from the garage providing performance for both fire safety and security.

As a PAS 24 tested and certified by Certisecure product, this doorset complies with security standards specified in Part Q, helping to reassure residents that their door can resist physical attack by a burglar.



SpeedSet Internal Doorsets

You're all set:

Fast installations: A competent person can install our SpeedSet doorsets in under 30 minutes.*

Repeatable complete installations, reducing installation and snagging costs, more cost effective.

Adaptable product features to tackle complicated installations.



Cost Effective



Rapid Installation



Risk Reduction



Certifire Approved



Options to comply with Building Regulations Part E



10 Year Guarantee (Door & Frame)


* in a controlled environment.

Product Information

The SpeedSet Interior Doorset is designed for fast installation, allowing each doorset to be installed in under 30 minutes.*

The doorset lining is adjustable, allowing easy modification to address variations in wall thickness you may encounter on site, ensuring a precise fit and efficient installation.



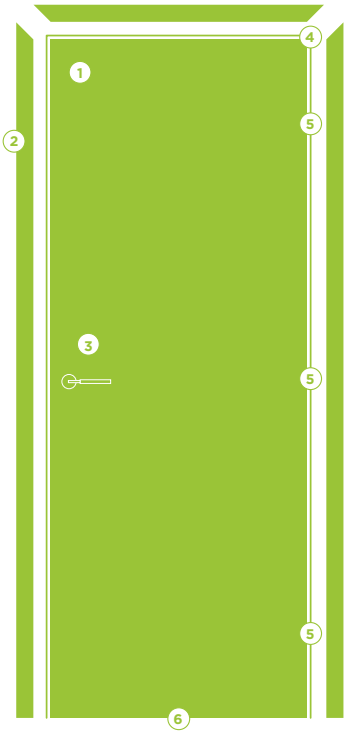

1 Door

- SpeedSet doorsets can be supplied in a variety of door styles, please refer to page 86 & 87 for further guidance.
- FD30 fire single door or double door configurations are available (pairs supplied unassembled for ease of transportation and handling).

2 Architrave

- White repaintable foil faced MDF architrave.
- Supplied pre-mitred.
- Supplied cut to length, minimal site decoration required.
- Various styles available.

3 Ironmongery

- Factory pre-serviced/fitted adjustable hinge, lock and latch options.
- Door handles need to be purchased separately via your preferred supplier.

4 Lining

- White re-coatable foil faced 25mm moisture resistant MDF linings.
- Lining widths, 77mm, 90mm, 95mm, 100mm, 115mm, 125mm, 133mm, 150mm to 300mm.
- Linings are adjustable by +/- 10mm with the exception of 77mm which is +10mm only and 300mm which is -10mm only.
- Minimal site decoration required.

5 Hinges

- Pre-hung on three adjustable hinges.
- Hinges allow adjustment to control gap between door and frame.
- Optional bearing butt hinge available on 35/40 & 44mm doors.



6 Door Stop

- 12mm factory fitted door stop as standard.

7 Fixing Pack

- Components and step by step fitting instructions.

8 Core Options

- Available with Premdor's Standard Core, Semi Solid, Safe 'N' Sound, Solid Core and FD30 fire doors.

SpeedSet Doorsets can be delivered in plot lots as required by your build programme. Individual doorsets are packaged and braced for safe transportation and storage and labelled to identify exact plot location.

* in a controlled environment.

SpeedSet Interior Doorsets Ironmongery & Accessories


Hinges
Doors are factory pre-hung on three CE Marked adjustable chrome effect hinges (bearing Class 13 hinge option available in chrome effect and satin silver). After installation and if necessary, the door to stop gap can be adjusted.

Fixing Brackets & Screws
All fixing brackets and screws required are supplied with the SpeedSet doorset. Fixing brackets and fixing screws are hidden by the architrave.


Door Stop
12mm factory fitted door stops as standard.

Lining
Manufactured from 25mm moisture resistant medium density fibreboard (MDF). FD30 doorsets come complete with intumescent strips fitted to jambs and head as standard, smoke seals available upon request.


Handles
Please note, door handles are not supplied.




65mm Latch
CE Marked
Chrome Effect




Bath Lock
CE Marked
Chrome Effect




Roller Catch
Chrome Effect
(Applied to door pairs only, not available on FD30 fire doors)



Shootbolt (optional)
Chrome Effect
(Applies to door pairs only)



Adjustable Hinge
Chrome Effect
(Standard)




Bearing Hinge
Chrome Effect or Satin Silver
(Optional on 35/40 & 44mm doors)


Architrave Designs

Architraves are supplied unassembled, but cut to length, pre-mitred and machined for 'butterfly' joining clips to connect the components together. Final installation on site is completed by gluing the architrave into the pre- machined architrave groove in the door lining using a standard construction adhesive.


White re-coatable foil faced finish frame and architrave requires minimum on site decoration, making it significantly easier to paint than a traditional timber lining.




Contemporary
58mm & 69mm



Ogee
58mm



Torus
58mm & 69mm




Art Deco
69mm

All types are 22mm thick

SpeedSet Interior Doorsets Technical Specification

SpeedSet Structural Openings

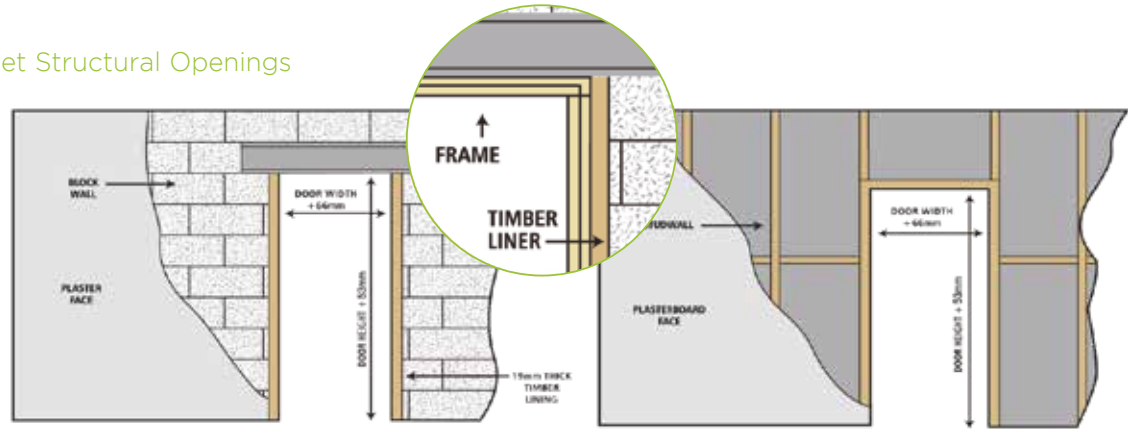

Stud wall drawing for illustration purposes only.

Standard door size	Brickwork opening size
914 x 1981mm (3' 0" x 6' 6")	980 x 2029mm
864 x 1981mm (2'10" x 6' 6")	930 x 2029mm
838 x 1981mm (2' 9" x 6' 6")	904 x 2029mm
762 x 1981mm (2' 6" x 6' 6")	828 x 2029mm
711 x 1981mm (2' 4" x 6' 6")	777 x 2029mm
686 x 1981mm (2' 3" x 6' 6")	752 x 2029mm
610 x 1981mm (2' 0" x 6' 6")	676 x 2029mm
533 x 1981mm (1' 9" x 6' 6")	599 x 2029mm
457 x 1981mm (1' 6" x 6' 6")	523 x 2029mm

Standard door size	Brickwork opening size
926 x 2040mm Standard Metric	992 x 2088mm
826 x 2040mm Standard Metric	892 x 2088mm
726 x 2040mm Standard Metric	792 x 2088mm
626 x 2040mm Standard Metric	692 x 2088mm
526 x 2040mm Standard Metric	592 x 2088mm

Restrictions may apply on some door sizes.
Bespoke sizes and pairs available upon request.


Door pair size square meeting stiles (SMS)	Brickwork opening size
1220 x 1981mm	1289 x 2029mm
1524 x 1981mm	1593 x 2029mm
1676 x 1981mm	1745 x 2029mm
1252 x 2040mm	1321 x 2088mm
1452 x 2040mm	1521 x 2088mm
1652 x 2040mm	1721 x 2088mm

Pairs supplied unassembled to ease handling.


Linings are available in a range of sizes and are adjustable up to +/- 10mm to suit wall thickness variation.

Please refer to the installation instructions for further guidance on adjustments.


Lining Dimensions

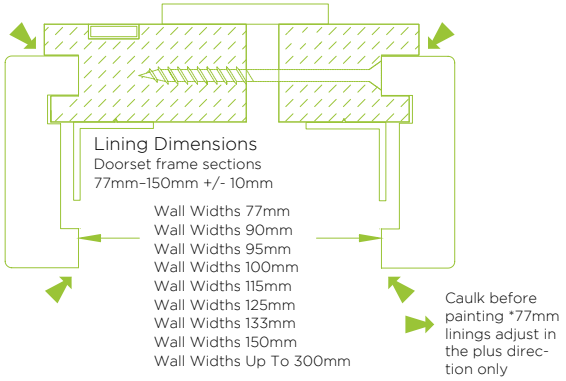

Operational Drawing

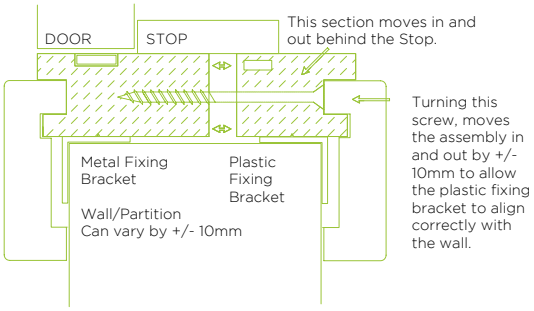

Door Handing

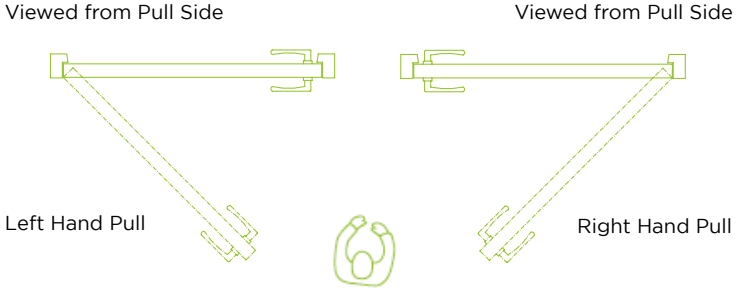

Communal Doorsets

You're all set:

Timber framed internal doorset for use in communal areas.

Commercial and residential projects where doors are in frequent use.

The FD30 and FD60 solutions both come with intumescent and cold smoke seals pre-installed within the frame.

FD30 & FD60 Options

Certifire Approved

Glazed Options Available

Equal and Un-equal Pair Options

10 Year Guarantee (Door & Frame)

Product Information

The solid rebated Communal Doorset is a timber framed internal doorset associated with the internal communal areas of busy buildings.

Available in FD30 and FD60. Both fire doorsets come with intumescent and smoke seals pre-installed within the frame. A non-fire doorset option is also available.

Door

- FD30 (44mm thick) and FD60 (54mm thick) doors.
- Non-fire option available.
- Doorsets are fully Certifire certificated once installed in line with certification.
- A wide range of doors and sizes including glazed options available.
- Equal and un-equal pairs available.

Door Frame

- FD30 doorsets are supplied with engineered softwood frames.
- FD60 doorsets are supplied with hardwood frames.
- Variations on frame finishes are available including raw timber, base stain and primed finish - please contact our team to discuss your required specifications.

Intrumescent and Seals

- Intumescent smoke seals pre-installed within the frame.

Hinges and Locks

- Single doorsets are pre-hung and pre-fitted with bearing butt hinges.
- Numerous lock types available including FB2 or Euro-sash lock.

Architraves

- Architraves are not supplied.

Door Closer

- Assa Abloy DC200A V-arm and DC500A slide arm surface mounted door closers are available on request.



Communal Doorsets Ironmongery & Accessories

Locks

Lock types available for specification include 5 lever sash lock or dead lock, Euro sash lock or dead lock, FB2 lock, plus other latches such as a tubular latch or bath lock.

Hinge Type

3x Grade 13, CE marked Stainless Steel bearing butt hinges (chrome effect or satin silver) with intumescent protection.

Intumescent / Smoke / Acoustic Seal

FD30 Doorsets include a 15mm x 4mm intumescent strip.
FD60 Doorsets include 2 x 15mm x 4mm intumescent strips.
Smoke and acoustic seal can be specified as required.

Drop Seal & Under Door Threshold

Doorsets can be specified with a drop seal. The variable height drop seal has a mechanism which lifts the seal clear of the floor as soon as the door is opened by a few millimetres. The seal is self-levelling and when fitted with the under door threshold will accommodate an under door gap of up to 12mm. An extruded aluminium threshold will be supplied where a drop seal is requested. An optional hardwood threshold is available on request. The aluminium threshold must be fitted for compliance.

Door Closers


Doorsets may be specified with a door closer. Options include V-arm or Slide Arm in silver or stainless steel. Assa Abloy DC500A Cam-action Slide Arm Door Closer and DC200A Rack and Pinion V-Arm Door Closer available on request. Suitable for both FD30 & FD60 fire doorsets, these surface mounted door closers are certified by Certifire, bear the CE mark and are available in silver or stainless steel finish. Door closers will be supplied loose for fitting on site.

Handles, Pull Handles, Push Plates, Kick Plates


Please note, door handles, pull handles, push plates or kick plates are not provided.

Shootbolt


A shootbolt (to head of door) can be specified with door pairs.



Bath Lock
CE Marked Chrome Effect



Bearing Butt Hinge
Stainless Steel
(Optional Chrome Effect or Satin Silver available)



Drop Seal




Under Door Threshold



V-Arm Door Closer



Side Arm Door Closer



Shootbolt (optional)
Chrome Effect
(Applies to door pairs only)

Communal Doorsets Technical Specification


Door Widths

Building Regulations Part M demand specific dimensions for doors and corridors, which have been calculated to assist the mobility of wheelchairs and prams into, and within, the dwelling. Details of our clear opening widths are shown in the table below.

Frame


FD30 doorsets supplied with a softwood frame. FD60 doorsets are supplied with a hardwood frame. Single door and door pairs available.

Frame Detail

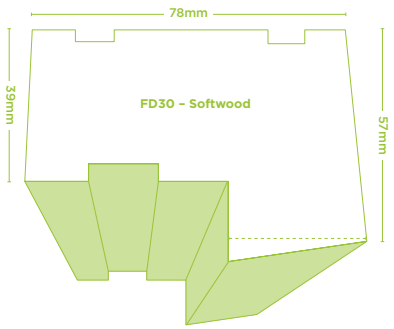


Door Handing

Viewed from Pull Side




Left Hand Pull

Viewed from Pull Side



Right Hand Pull

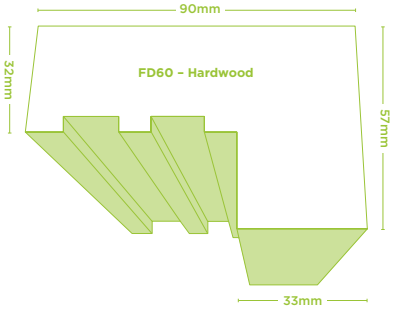

Clear opening dimensions for doors are determined by a number of components, the table below summarises this information by door size.

Door Width	Clear Opening		Overall Frame Width	Brickwork Opening	Clear Opening		Overall Frame Width	Brickwork Opening
	FD30		FD30	FD30	FD60		FD60	FD60
914mm x 1981mm	44mm	849mm	998mm	1018mm	54mm	833mm	986mm	1006mm
864mm x 1981mm	44mm	799mm	948mm	968mm	54mm	783mm	936mm	956mm
838mm x 1981mm	44mm	773mm	922mm	942mm	54mm	757mm	910mm	930mm
813mm x 2032mm	44mm	748mm	897mm	917mm	54mm	732mm	885mm	905mm
762mm x 1981mm	44mm	697mm	846mm	866mm	54mm	681mm	834mm	854mm
711mm x 1981mm	44mm	646mm	795mm	815mm	54mm	630mm	783mm	803mm
686mm x 1981mm	44mm	621mm	770mm	790mm	54mm	605mm	758mm	778mm
610mm x 1981mm	44mm	545mm	694mm	714mm	54mm	529mm	682mm	702mm
533mm x 1981mm	44mm	468mm	617mm	637mm	54mm	452mm	605mm	625mm
457mm x 1981mm	44mm	392mm	541mm	561mm	54mm	376mm	529mm	549mm
926mm x 2040mm	44mm	861mm	1010mm	1030mm	54mm	845mm	998mm	1018mm
826mm x 2040mm	44mm	761mm	910mm	930mm	54mm	745mm	898mm	918mm
726mm x 2040mm	44mm	661mm	810mm	830mm	54mm	645mm	798mm	818mm
626mm x 2040mm	44mm	561mm	710mm	730mm	54mm	545mm	698mm	718mm
526mm x 2040mm	44mm	461mm	610mm	630mm	54mm	445mm	598mm	618mm
426mm x 2040mm	44mm	361mm	510mm	530mm	54mm	345mm	498mm	518mm

(Effective clear opening, assuming door can open past 90 Degrees. Based on a 18mm stop, 7mm hinge throw and a 3mm edge gap.)

SoundSecure Entrance Doorsets

You're all set:

FD30 or FD60 fire doors in a variety of designs.

Secured by Design accreditation, meaning more peace of mind.

Third-party certification, more layers of assurance.



Secured by Design Accredited



10 Year Guarantee



FD30 & FD60 Options



White primed frame as standard on FD30 options



Opening Widths for Part M Requirements



Acoustic Seal Options Available for Part E Requirements



Fast Track - selected FD30 options available on a reduced lead-time

Product Information

The SoundSecure Entrance Doorset offers outstanding fire, security, smoke leakage and sound reduction properties, making it ideal for the complex performance demands of apartment entrances.

Supplied as either FD30 or FD60 rated fire doorsets, the SoundSecure is independently certified and tested within the Certifire and Certisecure third party certification schemes, as well as being Secured by Design accredited.

❶ Door

- SoundSecure doorsets can be supplied in a variety of FD30 (44mm thick) and FD60 (54mm thick) fire door options.
- All doorsets are supplied with full Secured by Design approval.
- Door widths available: 838mm, 864mm, 914mm and 926mm.
- Special sizes available upon request.

❷ Door Closer


- SoundSecure doorsets are supplied with a door closer that is tested and CE marked to EN 1154. Door closer options include Assa Abloy DC200A V-arm or DC500A slide arm, in silver or stainless steel finish. The V-arm option in silver is offered as the default option. Other upgradeable variants available if required.

❸ Door Frames

- FD30 doorsets are supplied with engineered primed softwood frames.
- FD60 doorsets are supplied with hardwood frames (raw timber, no variation).
- Variations on finish are available including raw timber, base stain and primed finish - please contact our team to discuss your required specifications.

❹ Lock, Handle and Cylinder System

- Secured by Design three point multipoint locking system complete with lever handles.
- Lock and handles can be used in both solid or split spindle modes.
- Locks are fitted with an escape (thumb turn) cylinder.
- 3* High Security cylinder with ergonomic thumbturn and secure cam design. Designed with multiple security features including anti-pick, anti-drill, anti-bump and a sacrificial snap section.

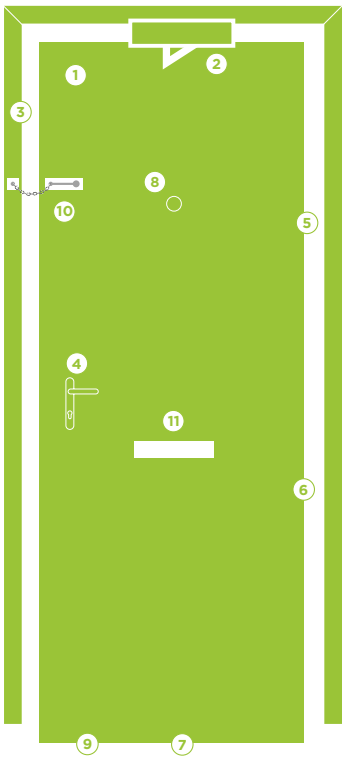

❺ Intumescent, Smoke and Acoustic Seals

- Acoustic smoke/draught seal and intumescent seals incorporated at the frame head and jambs.

❻ Hinges

- Doors are hung on three compatible grade 13 stainless steel security hinges.

❼ Automatic Drop Seal

- Self levelling drop seal is fitted at the bottom of the door as standard.

❽ Door Viewer

- Chrome security door viewer supplied as standard.
- Other upgradeable variants available if required.
- Standard door viewer included, with optional positioning available for mobility requirements.

❾ Threshold

- Aluminium threshold plate supplied as standard and must be fitted for compliance. Optional hardwood threshold available on request.

❿ Security Chain

- Chrome security door chain included, TS003 compliant.

⓫ Fire Rated Letter Plate and Cowl

- Optional TS008 compliant plate and security cowl.

SoundSecure Entrance Doorsets Ironmongery & Accessories

Locks & Cylinders
All doorsets are supplied with Secured by Design accreditation and feature a 3 point multipoint lock with an anti bump EuroProfile lock cylinder incorporating an internal thumb turn.

Hinge Type
3x Grade 13, CE marked Stainless Steel butt hinges with intumescent protection.

Letterplate
Optional TS008 compliant brushed or polished stainless steel letter plate and security cowl.


Handles
Lever handles are available in chrome (or optional silver) and can be fitted for use in either solid or split spindle modes.

Door Viewer
A chrome (or optional silver) security door viewer is supplied as standard. Low and high height locations available for accessibility requirements.

Door Chain
A chrome (or optional silver) security door chain is included to complement the system, compliant to TS003.

Automatic Drop Seal
A variable height drop seal concealed within the base of the door leaf includes a new, higher efficiency mechanism which lifts the seal clear of the floor as soon as the door is opened by a few millimetres. The seal is self-levelling when fitted with the under door aluminium threshold.


Under Door Threshold
An extruded aluminium threshold is supplied as standard and must be fitted for compliance. An optional hardwood threshold is available on request.




Chrome Handles and Thumb Turn-Key Cylinder
(Silver option available)



Chrome Security Door Viewer
(Silver option available)




Automatic Drop Seal



Chrome Security Chain
(Silver option available)



Fire Rated Letter Plate and Cowl
(Brushed or polished stainless steel available)



Under Door Threshold



Cylinder

Secured by Design
SoundSecure door and frame assembly meets the Secured by Design scheme requirements and is independently tested and certificated by the Certifire / Certisecure schemes, covering fire, security and smoke leakage. Premdor hold an SBD licence for this product. Where a Secured by Design specification is not required, please ask for a quotation for our cost effective non-Secured by Design option.

SoundSecure Entrance Doorsets Technical Specification

Smoke / Acoustic Seal

Smoke and acoutsic seal fitted into timber frames.


Door Widths

Building Regulations Part M demand specific dimensions for doors and corridors, which have been calculated to assist the mobility of wheelchairs and prams into, and within, the dwelling. Details of our clear opening widths are shown in the table below.

Intumescent Seal

FD30 10mm x 4mm strip and 15mm x 4mm strip.
FD60 2 x 15mm x 4mm strips.

Door Handing

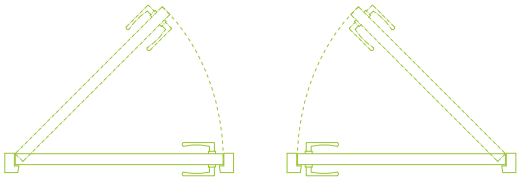

Left Hand Hinged (LHH) (Viewed from corridor)

Right Hand Hinged (RHH) (Viewed from corridor)

Door Closers

Assa Abloy DC500A Cam-action Slide Arm Door Closer

Suitable for FD30 fire doorsets. Designed with variable closing force EN 1-4 and conforming to EN 1154, this slide arm surface mounted door closer is certified by Certifire under CF5096 and bears the CE mark. Available in silver or stainless steel finish.

Door closers will be supplied loose for fitting on site.



Side Arm Door Closer

Assa Abloy DC200A Rack and Pinion V-Arm Door Closer

Suitable for both FD30 & FD60 fire doorsets. Designed with variable closing force EN 2-4 and conforming to EN 1154, this V-arm surface mounted door closer is certified by Certifire under CF5098 and bears the CE mark. Available in silver or stainless steel finish.

Door closers will be supplied loose for fitting on site.



V-Arm Door Closer

Clear opening dimensions for doors are determined by a number of components, the table below summarises this information by door size:

Door Width	Clear Opening FD30		Overall Frame Size	Brickwork Opening	Clear Opening		Overall Frame Size	Brickwork Opening
	FD30		FD30	FD30	FD60		FD60	FD60
914mm x 1981mm	44mm	851mm	998mm x 2034mm	1008mm x 2044mm	54mm	838mm	986mm x 2028mm	996mm x 2038mm
864mm x 1981mm	44mm	801mm	948mm x 2034mm	958mm x 2044mm	54mm	788mm	936mm x 2028mm	946mm x 2038mm
838mm x 1981mm	44mm	775mm	922mm x 2034mm	932mm x 2044mm	54mm	762mm	910mm x 2028mm	920mm x 2038mm
926mm x 2040mm	44mm	863mm	1010mm x 2093mm	1020mm x 2103mm	54mm	850mm	998mm x 2087mm	1008mm x 2097mm

(Based on a 18mm stop, 7mm hinge throw and a 3mm edge gap.)

Fast Track SoundSecure FD30 Entrance Doorsets



15 DAYS

NEW FD30 Fast Track service now available

on selected styles and sizes, ready for delivery within 15 days!



Vertical
5 Panel
Textured



Ladder
Smooth



2 Panel
Smooth



6 Panel
Textured

4 Line
Horizontal
Smooth

Paint Grade
Plus



Oak Vertical

3 Sizes Available

926x2040x44mm
914x1981x44mm
838x1981x44mm

For a competitive quote contact your local Area Sales Manager or our Estimating Team at **estimating@masonite.com**

Integral Garage Doorsets

You're all set:

A practical solution for entrances to the home from the garage.

PAS 24 tested and certified by Certisecure, complying with security standards specified in Part Q.

Provides performance for both fire safety and security.

SBD PAS 24

Secured by Design Accredited

10 Year Guarantee

FD30

FD30 Options

Opening Widths for Part M Requirements

Acoustic Seal Options Available for Part E Requirements

White primed frame as standard

Product Information

Integral Garage Doorsets provide a practical solution for entrances to the home from the garage, providing performance in fire safety and security.

As a PAS 24 tested product certified by Certisecure, this doorset complies with security standards specified in Part Q, demonstrating resistance physical attack by a burglar.



1 Door


- Integral Garage doorsets can be supplied in a variety of FD30 (44mm) fire door options.
- All doorsets are supplied with full Secured by Design approval.
- Door widths available: 838mm, 864mm, 914mm and 926mm.
- Special sizes available upon request.
- Open out doorsets available upon request, for further information please contact us.

2 Door Closer

- Door closer options include Assa Abloy DC200A V-arm or DC500A slide arm, in silver or stainless steel finish.
- The V-arm option in silver is offered as the default option with other variants available for specification.
- Door closers are tested and CE marked to EN 1154.

3 Door Frame

- FD30 doorsets are supplied with engineered primed softwood frames (no variation).
- Variations on finish are available including raw timber, base stain and primed finish ready for final finishing on site - please contact our team to discuss your required specifications.

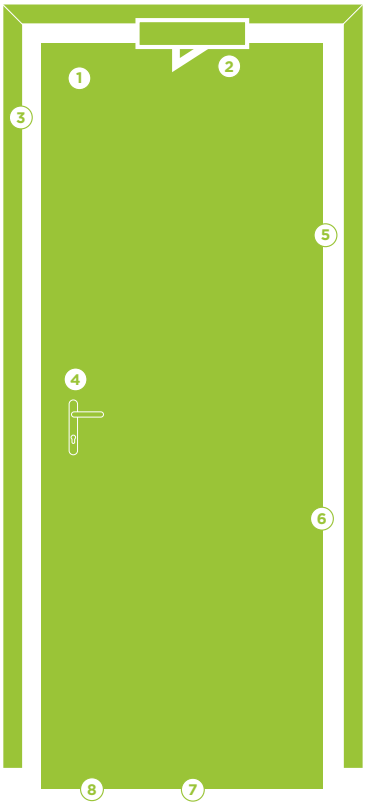

4 Lock, Handle and Cylinder System

- Secured by Design three point multipoint locking system complete with lever handles.
- Lock and handles can be used in both solid or split spindle modes.
- Locks are fitted with an escape (thumb turn) cylinder.
- 3* High Security cylinder with ergonomic thumbturn and patented secure cam design. Designed with multiple security features including anti-pick, anti-drill, anti-bump and a sacrificial snap section.

5 Intumescent, Smoke and Acoustic Seals

- Acoustic/smoke/draught seal and intumescent seals incorporated at the frame head and jambs.

6 Hinges

- Doors are hung on three compatible grade 13 stainless steel security hinges.

7 Automatic Drop Seal

- Self levelling drop seal is fitted at the bottom of the door as standard.

8 Threshold

- Aluminium threshold plate supplied as standard and must be fitted for compliance. Optional hardwood threshold available on request.

Integral Garage Doorsets Ironmongery & Accessories

Locks & Cylinder

All doorsets are supplied with a 3 point multipoint lock with an anti bump EuroProfile lock cylinder incorporating an internal thumb turn.




Cylinder

Hinge Type

3x Grade 13, CE marked Stainless Steel butt hinges with intumescent protection.

Handles

Lever handles are available in chrome (or optional silver) and can be fitted for use in either solid or split spindle modes.




Chrome Handles and Thumb Turn-Key Cylinder

(Silver option available)

Automatic Drop Seal

A variable height drop seal concealed within the base of the door leaf includes a new, higher efficiency mechanism which lifts the seal clear of the floor as soon as the door is opened by a few millimetres. The seal is self-levelling when fitted with the under door aluminium threshold.




Automatic Drop Seal

Under Door Threshold

An extruded aluminium threshold is supplied as standard and must be fitted for compliance. An optional hardwood threshold is available on request.

Intumescent Seal

FD30 10mm x 4mm strip and 15mm x 4mm strip.



Under Door Threshold

Smoke / Acoustic Seal

Smoke and acoustic seal fitted into timber frames.

Integral Garage Doorsets Technical Specification

Door Closers

Assa Abloy DC500A Cam-action Slide Arm Door Closer

Suitable for FD30 fire doorsets. Designed with variable closing force EN 1-4 and conforming to EN 1154, this slide arm surface mounted door closer is certified by Certifire under CF5096 and bears the CE mark.
Available in silver or stainless steel finish.

Door closers will be supplied loose for fitting on site.

Assa Abloy DC200A Rack and Pinion V-Arm Door Closer

Suitable for FD30 fire doorsets.
Designed with variable closing force EN 2-4 and conforming to EN 1154, this V-arm surface mounted door closer is certified by Certifire under CF5098 and bears the CE mark.
Available in silver or stainless steel finish.

Door closers will be supplied loose for fitting on site.



Side Arm Door Closer



V-Arm Door Closer

Door Widths


Building Regulations Part M demand specific dimensions for doors and corridors, which have been calculated to assist the mobility of wheelchairs and prams into, and within, the dwelling. Details of our clear opening widths are shown in the table below.

Clear opening dimensions for doors are determined by a number of components, the table below summarises this information by door size:

Door Width	Clear Opening FD30		Overall Frame Size	Brickwork Opening
	FD30		FD30	FD30
914mm x 1981mm	44mm	851mm	998mm x 2036mm	1008mm x 2046mm
864mm x 1981mm	44mm	801mm	948mm x 2036mm	958mm x 2046mm
838mm x 1981mm	44mm	775mm	922mm x 2036mm	932mm x 2046mm
926mm x 2040mm	44mm	863mm	1010mm x 2095mm	1020mm x 2105mm

(Based on a 18mm stop, 7mm hinge throw and a 3mm edge gap.)

Door Handing

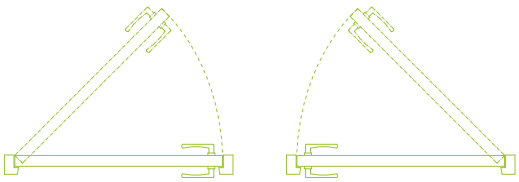

Left Hand Hinged (LHH)

Right Hand Hinged (RHH)

Moulded Door Designs

More design options available, please speak to your account manager.



2 & 3 panel shallow smooth

S SS C IG



Ladder smooth

FT S SS C IG



1 panel smooth

S SS C IG



2 panel smooth

FT S SS C IG



2 panel arch top textured

S SS C IG



Horizontal 4 line smooth

FT S SS C IG



4 panel smooth & textured

S SS C IG



Vertical 5 panel textured

(smooth coming soon)

FT S SS C IG



5 panel smooth

S




6 panel smooth & textured

FT S SS C IG



Manhattan glazed

S

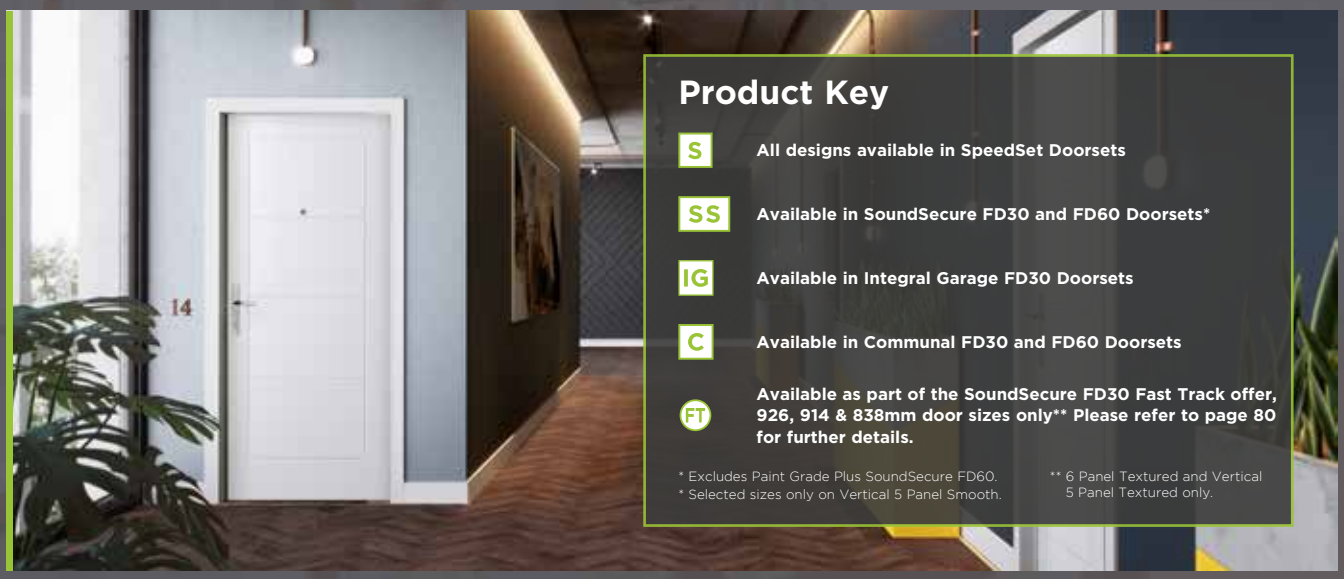

Product Key

S — **All designs available in SpeedSet Doorsets**

SS — **Available in SoundSecure FD30 and FD60 Doorsets***

IG — **Available in Integral Garage FD30 Doorsets**

C — **Available in Communal FD30 and FD60 Doorsets**


FT — **Available as part of the SoundSecure FD30 Fast Track offer, 926, 914 & 838mm door sizes only** Please refer to page 80 for further details.**

* Excludes Paint Grade Plus SoundSecure FD60.
* Selected sizes only on Vertical 5 Panel Smooth.

** 6 Panel Textured and Vertical 5 Panel Textured only.

Flush Door Designs

More design options available, please speak to your account manager.

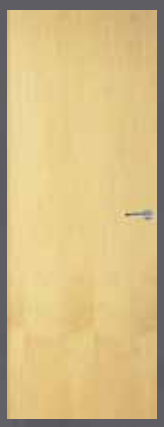

European Ash veneer

S SS C IG



Koto veneer

S SS C IG



Sapele veneer

S SS C IG



Steamed Beech veneer

S SS C IG



American Black Walnut

S SS C IG




Anegre

S SS C IG



American White Oak veneer

S SS C IG




Paint grade plus

FT S SS C IG



Popular paint grade lipped

S SS C IG



Oak vertical

FT S SS C IG




Walnut vertical

S SS C IG



Durador vertical

S SS C IG




Oak two stile

S SS C IG




Walnut two stile

S C




Charcoal horizontal

S SS C IG



Charcoal horizontal four line

S SS C IG



Light grey horizontal

S SS C IG



Light grey two stile

S SS C IG



Light grey 4 line horizontal

S C

door-stop®
INTERNATIONAL



Factory production control checks

Security of supply

Extensive testing regimes



Dual Certified Fire & Security Timber Composite Entrance Doorsets with GRP Facings

Our Door-Stop fire doorsets are designed with safety in mind

Developed with safety in mind

Our Door-Stop dual certified fire doorsets are passed for both fire and security performance.

With a strict “critical to safety” framework detailing the various quality checks throughout the production of every fire doorset we manufacture, you have added peace of mind that your new fire door systems are fit for purpose.

With ten styles in a choice of eleven painted colours we can offer design flexibility and doorset personalisation.



Please visit our website for further details

www.masonite.co.uk/firedoorsets






External Doorsets

Transform your front door into a stylish and stunning entrance to your home.

Unique colours, the latest high security hardware and beautiful features are just some of the reasons why choosing one of our external doorsets will give your property instant kerb appeal and you peace of mind.

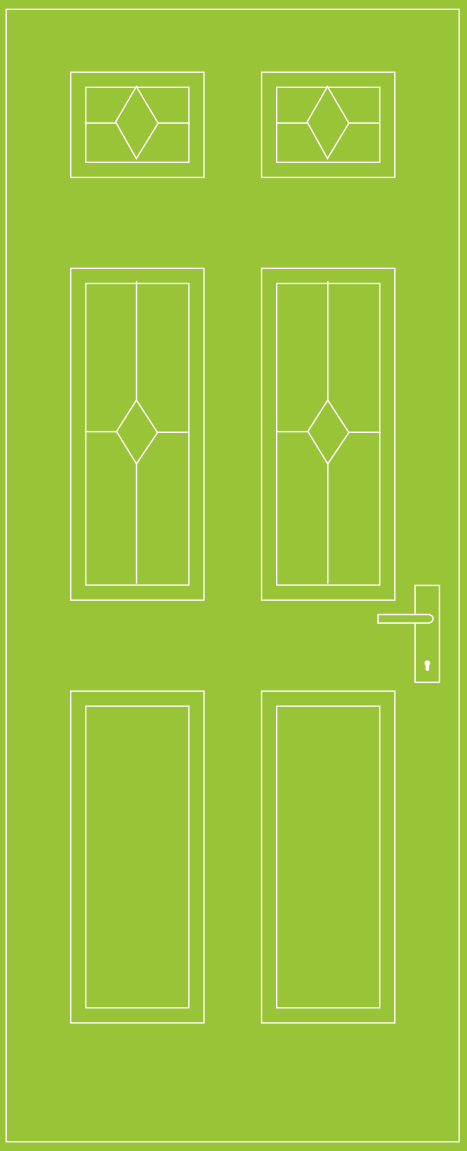


11a



Make an Entrance

No other brand has a more respected, trusted and widely installed range of quality external doorsets than Masonite.

An innovative range of product specifications, designs and price options. Our exterior Composite door collection will give your home the look it deserves.

Door-Stop International®

900 billion combinations of GRP composite doorsets configured in one minute through a 5 step online ordering system.

Solidor®

Stunning designs, unparalleled security and a unique 48mm solid timber core. No other composite door comes close to competing with Solidor in terms of sophistication and performance.


39



door-stop®
INTERNATIONAL

The Trade's Favourite Composite Door

We don't believe in compromising on quality. We've brought together materials to give you the very best in strength, easy maintenance, security, and weather resistance. Looks great too!

At the heart of every Door-Stop door is style, strength and security. With an easy to use configurator tool to determine your door specification; including the option to colour both sides of your door, choosing Door-Stop is an easy choice, the colour of your door on the other hand, may not be.

All doors delivered, ready to install, with fast and reliable lead times.

GET IN TOUCH

www.door-stop.co.uk

01623 446336



PART Q COMPLIANT

PAS 24

TS008 Letterplate

Colour matched to the furniture suite.
Internal cowl, white.

Security

At Door-Stop we're serious about providing the assurance you need for you and your customer. Our doors are part Q compliant, tested to BS 6375 Parts 1,2 and 3 and PAS 24 British standards.



Energy Rated

Tested for thermal efficiency, each Door-Stop door is given a U-Value rating that fits well within the current building regulations U-Value requirements.



Secured by Design

SBD

Police Preferred Specification



Secured by Design

If anyone knows about security, it's the Police. Our Secured by Design option meets their national standard for safer homes. It's not only Police-approved – it's recognised by many insurance companies. So as well as enjoying an added sense of safety, you could get a discount on your home insurance cover, too.

Weather Tested

The average rainfall in the UK is between 700mm a year in East Anglia and 3,000mm a year in the Scottish Highlands.* We've designed our doors for maximum resilience against the extremes of the British climate.

WATERTIGHTNESS	AIR PERMEABILITY	WIND RESISTANCE
Tested in accordance with BSEN 1027	Tested in accordance with BSEN 1026	Tested in accordance with BSEN 12211

*Meteorological Office Statistics



Part M compliant, colour-coded thresholds

We are fixated with offering the best possible looking door. Even though it is only 15mm high, and Part M compliant, the wheelchair threshold can still be seen from outside. That's why Door-Stop wheelchair thresholds will always match the external colour you chose for the door frame. This isn't something you need to select, you just get it as standard.












Contemporary Furniture

A front door speaks volumes about a property. Now you can make even more of a statement with our range of contemporary furniture suites that can transform your door into a real property feature.


Choose from the Long Bar handle suite, the ultra-modern Square suite, the elegant Bow Handle suite, or the timeless Classic suite.

These hardware choices are undeniably elegant, but also incredibly hard wearing. Crafted from stainless steel, they will endure the demands of the British weather and everyday use season after season.


CLASSIC MOULDED DOORS

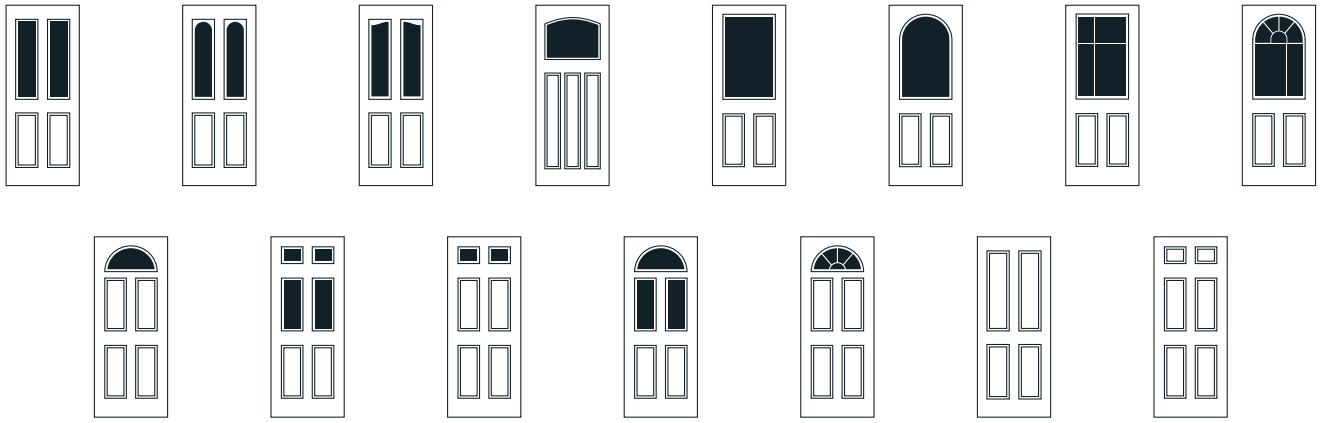

CONTEMPORARY DOORS

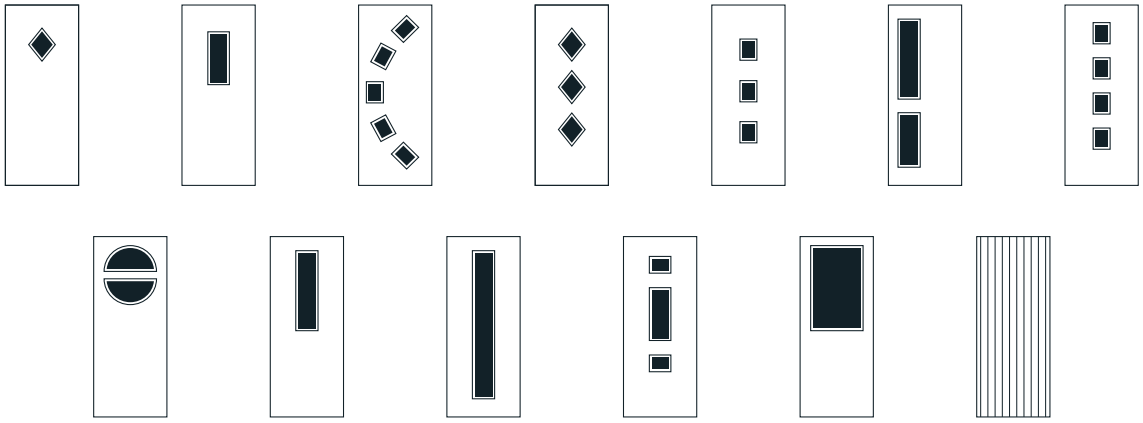

COLOUR OPTIONS

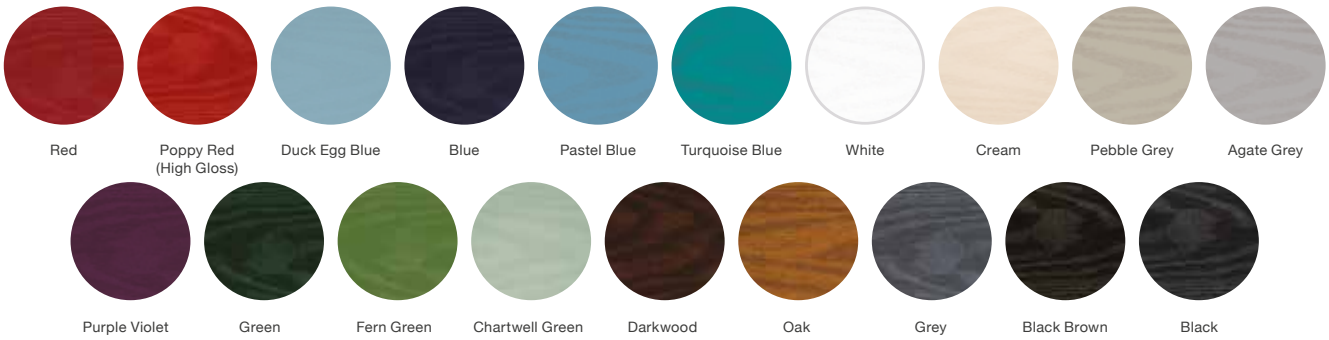

Visit www.door-stop.co.uk and try our easy 5-step door configurator to see all our options

Have questions? Get in touch with Door-Stop at sales@door-stop.co.uk or 01623 446336





The UK's best composite doors

Born in 2004, Solidor has firmly established itself as the nation's favourite manufacturer and supplier of composite doors.

Fitted and installed via a nationwide network of approved installers, the extensive Solidor range of composite doors are widely admired for their stunning design and unparalleled security. No other composite door comes close to competing with Solidor in terms of sophistication and performance.

Key features

A unique 48mm solid timber core

An industry leading range of colour options

A robust thermoplastic skin

Hidden edge banding

Chamfered or sculptured frame options

PAS24: 2016 Certified

Designer furniture

Stylish. Secure. Solidor®

www.solidor.co.uk
01782 847300





Solid timber core

All of our composite doors are based on our proven 48mm design that is 10% thicker than our nearest competitors and offers incredible around-the-clock protection. The added thickness of a Solidor is because it is manufactured from a solid timber core, which helps make it the most durable composite door on the market.

Secure as standard

Britain's most secure composite doors have just got even better thanks to Ultion. Fitted as standard in every Solidor, this revolutionary locking system will remain locked, when locked.

Supreme Security Accreditations











Beautiful glazing

A fine selection of beautiful glass to perfectly complement each door style. Including the Modernist Range, inspired by classical artistic styles, such as art deco, minimalism, and the impressionist movement. The Modernist Range of glass is unique to Solidor.

A wide range of accessories

A range of beautiful accessories for our composite doors, including an array of elegantly styled and finished hinges, handles, letter plates and door knockers.







A colourful entrance

At Solidor we offer the market's largest range of colours which currently stands at 21. Homeowners now have the choice to be as unique as possible and opt for two different finishes for each side of their Solidor.

Whilst most of our competitors are limited with choice, we've developed a colour range worthy of any home.

Stable and French doors

Many of our Traditional and Italia collection door styles can be transformed into stable and French doors. You can even opt for different colours, inside and out!

Stylish. Secure. Solidor®

www.solidor.co.uk
01782 847300

THE Traditional COLLECTION

The Traditional collection from Solidor, brings classic designs into the modern era. Each door design is suited to both traditional and modern properties alike, and will add a touch of elegance to every home.



THE Italia COLLECTION

The Italia collection from Solidor is a new generation of truly contemporary designs which will add a touch of style to your home. Carefully designed and crafted from the finest materials, every door in the Italia collection has a definite style inspired by the Italian passion for design.



Side panels

We offer matching side panels for our full range of doors in full height and half height options. There's also a complete range of matching glass designs from our extensive range, so your side panel will be in complete harmony with your front door.



A colourful entrance

Standard colour options * Available as a door and/or frame option

Ruby Red | Green | Blue | Black | * White

Premium colour options * Available as a door and/or frame option

* Anthracite Grey | * Cream | * Golden Oak | * Foiled White | * Schwarzbraun Black | * Rosewood

Truffle Brown | Pistachio Green | Buttercup Yellow | Forest Green | Granite Grey | Pebble Grey | Pottery Blue

Luxury colour options * Available as a door and/or frame option

French Grey | Duck Egg Blue | Peacock Blue | * Irish Oak | Twilight Grey | * Chartwell Green

Midnight Grey | Tangerine | Painswick

Discover the Solidor Sales Generator



The Solidor Sales Generator allows your customers to design their own personal Solidor door, and send the enquiry directly to you.

- ✓ Fully mobile responsive for all devices
- ✓ User friendly and tested interface
- ✓ Easy to integrate into any website
- ✓ Fully branded to your company
- ✓ Sends your personalised emails to customers
- ✓ Lead generation
- ✓ Include full Solidor Range

Visit www.solidor.co.uk or call 01782 847300 to find out how Solidor can help you grow your composite door business

Stylish. Secure. Solidor®

www.solidor.co.uk

01782 847300





Exterior French and Folding

Design trends aren't just restricted to the inside of our homes. Show stopping French and folding doors can instantly create the impression of a much larger, more vibrant space.

Still one of the most popular concepts in interior design around 'inviting the outside in' French and Folding doors allow you to completely open up the back of your house to the garden. This can be great in the summer to expand your living area outdoors, but also create a seamless connection between your home and the green spaces beyond the whole year round.

This trend will continue to thrive, so whatever your style, enjoy making it your own.

Oak French Doors

Oak Folding Doors

White French Doors

White Folding Doors

Oak French Doors

PART L COMPLIANT



Bring the Outside In

- The doors are 54mm thick, with both the doors and frames built using a modern engineered construction, with a hardwood core and 1.2mm oak surface.
- Sets are supplied ‘ready to assemble’, with most components pre-machined at our factory.
- The 54mm double glazed units incorporate special Low ‘E’ thermal glass, which is toughened to BS EN 12150 and BS EN 12600.
- Supplied unassembled for on site assembly, with full fitting instructions included.
- Our sets incorporate double weather and draught seals.
- Supplied with Zinc alloy concealed hinges with Polished Chrome handle.
- Doors are open out only; the main opening door is not reversible.

Door Size	Code
1190 x 2090mm (4ft approx)	FDPFO 04S
1490 x 2090mm (5ft approx)	FDPFO 05S
1790 x 2090mm (6ft approx)	FDPFO 06S

All doors are to the nearest metric equivalent size (allow an extra 10mm for brickwork opening sizes). Pre-glazed with 54mm Argon filled Low ‘E’ double glazed units.
U Value 1.4 W/m2•K

Oak Folding Doors

PART L COMPLIANT



A Touch of Elegance

- Door sets are factory finished with 3 coats of high-build micro-porous finish applied and ready to install on-site.
- All sets incorporate a 3 point insurance rated PAS 23/24 tested lock on the main access door and lockable slide bolt on the inside.
- These pre-glazed oak veneered sets are unique in that they are reversible, allowing the choice of right or left hand opening.
- Supplied unassembled for on site assembly, with full fitting instructions included.
- The doors are 54mm thick, with both the doors and frames built using a modern engineered construction, with a hardwood core and 1.2mm oak surface.
- Oak folding doors are supplied with a fully finished oak cill with aluminium sub cill for drainage.

Door Size	Code
1790 x 2090mm (6ft approx)	54PFO 06S
2090 x 2090mm (7ft approx)	54PFO 07S
2390 x 2090mm (8ft approx)	54PFO 08S
2690 x 2090mm (9ft approx)	54PFO 09S
2990 x 2090mm (10ft approx)	54PFO 10S
3590 x 2090mm (12ft approx)	54PFO 12S
4190 x 2090mm (14ft approx)	54PFO 14S
4790 x 2090mm (16ft approx)	54PFO 16S

All doors are to the nearest metric equivalent size (allow an extra 10mm for brickwork opening sizes). Pre-glazed with 24mm argon filled Low ‘E’ double glazed units. U Value 1.4 W/m2•K

White French Doors

PART L COMPLIANT



A Modern Statement

- All of the timber components are manufactured using the latest technology to reduce warping or twisting.
- The doors are 54mm thick, with both the doors and frames built using a modern engineered construction, with a hardwood core and 1.2mm hardwood veneered surface.
- Sets are supplied 'ready to assemble', with most components pre-machined at our factory.
- The 54mm double glazed units incorporate special Low 'E' thermal glass, which is toughened to BS EN 12150 and BS EN 12600.
- Supplied unassembled for on site assembly, with full fitting instructions included.
- Our sets incorporate double weather and draught seals.
- Supplied with Zinc alloy concealed hinges with Polished Chrome handle.
- Doors are open out only; the main opening door is not reversible.

Door Size	Code
1190 x 2090mm (4ft approx)	FDPFW 04S
1490 x 2090mm (5ft approx)	FDPFW 05S
1790 x 2090mm (6ft approx)	FDPFW 06S

All doors are to the nearest metric equivalent size (allow an extra 10mm for brickwork opening sizes). Pre-glazed with 54mm Argon filled Low 'E' double glazed units.
U Value 1.4 W/m2•K

White Folding Doors

PART L COMPLIANT



Fully Adjustable

- Our hardwood folding white doors are fully finished using a 3 coat Hi Build Microporus Wood Coating System, so they are ready to install on site without further finishing.
- Sets are fully reversible so can be hung to operate from right to left or left to right.
- The set includes a 3 point locking system plus internal keyed drop bolts for extra security. The 3 point security locks are PAS 23/24 tested.
- Supplied unassembled for on site assembly, with full fitting instructions included.
- The doors are 54mm thick, with both the doors and frames built using a modern engineered construction, with a hardwood core and 1.2mm hardwood veneered surface.
- Folding doors are supplied with a fully finished hardwood cill with aluminium sub cill for drainage.
- Supplied with polished chrome handles and stainless steel hardware.


Door Size	Code
1790 x 2090mm (6ft approx)	54PFW 06S
2090 x 2090mm (7ft approx)	54PFW 07S
2390 x 2090mm (8ft approx)	54PFW 08S
2690 x 2090mm (9ft approx)	54PFW 09S
2990 x 2090mm (10ft approx)	54PFW 10S
3590 x 2090mm (12ft approx)	54PFW 12S
4190 x 2090mm (14ft approx)	54PFW 14S
4790 x 2090mm (16ft approx)	54PFW 16S

All doors are to the nearest metric equivalent size (allow an extra 10mm for brickwork opening sizes). Pre-glazed with 24mm argon filled Low 'E' double glazed units.
U Value 1.4 W/m2•K

Option Plus

Save time and cost by adding our factory options to your door. Prices are available on application.

Contact **0844 209 0008**



Factory Glazing

- Doors can be supplied fully factory glazed where applicable.
- Available on both Solid Core, Safe 'N' Sound and fire door options.
- Glazed mobility fire doors meet Building Regulation Part M.
- Fire doors available with either clear, clear wired or obscure glass.
- Available on Portfolio, Standard Veneer, Moulded and Paint Grade doors.



White Factory Paint (Face Only) Finishing

- Textured and Smooth Moulded panel doors (where applicable) can be supplied factory 'face only' finished in white satin paint (RAL 9003). **Does not include door edges.**
- Edge banding available on moulded doors. Please specify if required.
- Cost effective solution, providing a high-quality durable paint finish.
- Paint finish guaranteed for two years.*
- 'Touch up' paint available for on-site repair. Order code: 43075 (can).



Factory Priming (Face only)

- Textured and Smooth Moulded panel and Popular Paint Grade doors can be supplied factory 'face only' primed (RAL9002). Does not include door edges.
- Edge banding available.
- Reduces the number of coats of paint required on site.
- Saves time and reduces on site painting costs.



Non Standard Sizes

- If our standard sizes do not meet your requirements, variations are available. Details and quotation available on request.

N.B. On Moulded doors special sizes may be limited by the configuration of the moulded design.



Supply and Fit Intumescent Seals to Fire Doors

- Standard intumescent and combined intumescent smoke and cold seal available.
- Saves time on site.
- Ensures that the correct seal is accurately fitted to comply with fire test certification.

* Please refer to Masonite.co.uk to view current guarantee information.



Product Category	Non Fire Door Glazing*	Factory Glazing Fire Doors*	White Factory Paint (Face Only)	Factory Priming (Face Only)	Non Standard Sizes*	Intumescent Brush and Cold Seals (Fire Doors Only)
Portfolio	✓	✓			✓	✓
Portfolio Glazed Fire Doors (Excludes 50R Design)		✓			✓	✓
Standard Veneer		✓			✓	✓
Standard Veneer Glazed Fire Doors		✓				
Moulded (Textured – Excludes Bi-Fold)	✓	✓	✓	✓	✓	✓
Moulded (Smooth – Excludes Bi-Fold)	✓	✓	✓	✓	✓	✓
Paint Grade Plus		✓		✓	✓	✓
Popular Paint Grade		✓		✓	✓	✓
Paint Grade – Glazed Fire Doors		✓				

*Availability depends on Portfolio, Veneer and Moulded design and core type.

Technical Information

Moulded Specification

Door Finishing

Moulded panel doors are suitable for on-site paint finish only. Door faces are supplied with a white base coat ready for on-site finishing. Base coat and priming does not seal the door fully against moisture penetration on-site, so it is important to ensure correct handling and storage of products in a dry and temperature controlled environment before fitting. Refer to the Masonite website for storage, handling and finishing guidance.

Factory prime finish (RAL 9002) is available on textured and smooth doors, face only.

White factory paint finishing (RAL 9003) is available on textured and smooth doors, face only.

Bi-fold doors are available with a base coat primer finish only.

Touch Up Paint

Order code: 43075 – Can.

Glazing

Glazed doors are supplied with glass tested to the requirements of BS EN 12600 and BS EN 12150.

On-site preparation may be required to fill bead pin holes.

Vertical 5 panel 1 light and half light clear etched glazed, 5 panel smooth 3/4 light and 5 light clear glazed are suitable for residential use only.

Canadian glazed doors feature individual clear bevelled glass panels.

Manhattan doors feature single pane glazing. The glazing bar effect is created using white or chrome effect decorative leaded detail on both sides.

Interior glazed moulded (page 46), obscure glass is supplied in a Stippolyte design.

Moulded glazed Fireshield FD30 and Firemaster FD60 doors are supplied with clear (unwired) fire resistant glazing systems as standard.

Door Pairs

Horizontal 4 Line Moulded is not suitable to use as door pairs.

When installing Canadian glazed pairs ensure the glass bevel is located on the same side on both doors.

Bi-Fold Doors

Bi-fold doors have the moulded panel design on both sides and are suitable for use as room dividers or wardrobe doors. The doors are supplied pre-hinged with running gear included. Door sizes shown are aperture size, with actual product dimensions slightly smaller to allow for door
gear and clearance.

For track and kit guarantee please contact the sales office.

Factory priming and white factory paint finishing are not available on Bi-fold doors.

Standard Veneer, Portfolio & Paint Grade Specification

Standard Veneer Doors

Veneered doors are manufactured using commercial grade available veneer cuts and timber lippings to complement the door design.

Faces are lacquered for a superior finish (this does not include door edges).

Veneers are natural products, and colour and graining can vary and should be expected, dependent on species.

Book matched standard flush veneers are available, for further information contact the sales office.

Our standard veneer cut specifications are:

Anegre: Mixed crown, half-crown and quarter cut

European Ash: Mixed crown and half-crown

Steamed Beech: Quarter cut only (slip match)

Koto: Quarter cut only

Sapele: Quarter cut only

American White Oak: Mixed crown and half-crown

American Black Walnut: Mixed crown and half-crown

Portfolio Doors

Portfolio doors are made with engineered timber veneers that provide an industry leading colour and grain match.

Prolonged exposure to direct sunlight can cause colour changes in these veneers.

All 35mm doors are Solid Core construction with the exception of Durador which is 35mm Standard Core.

Portfolio doors are also available as fire doors with a thickness of 44mm (30 minute fire doors) or 54mm (60 minute fire doors).

Doors are supplied with engineered timber lippings to the two long edges as standard, designed to complement the face finish.

Popular Paint Grade Doors

Paint Grade doors are supplied without a surface finish as standard, with lipped vertical exposed edges and are suitable for paint finish only.

Faces and edges will require surface preparation before finishing on-site.

Paint Grade Plus Doors

Paint Grade Plus doors are manufactured using smooth timber fibre faces, to offer a smooth surface suitable for paint finishing.

Doors are available in a lipped or un-lipped specification.

Door Pairs

Portfolio Charcoal and Light Grey Four Line Horizontal doors are not suitable for door pairs.

Standard timber veneers are a natural material and as such, we cannot guarantee matching grain or colour on any standard flush veneered door style. For book matched veneers, please contact the sales office for further information or advice.

The customer must highlight at the point of order if doors are going to be used in a ‘double door’ configuration and on opening direction, as this may affect availability and associated components.

Glazing Bead

Paint Grade doors are supplied with timber beads that do not have a surface coating in order to be finished on-site. All other doors are supplied with beading to complement the veneer faces.

Portfolio doors are supplied with co-ordinating glazing bead.

ExtraCORE

ExtraCORE is available in selected styles where extra trimming maybe required on-site, such as refurbishment situations. Approximately 40mm can be trimmed from each door stile or rail without affecting the integrity of the door, although it is recommended that equal dimensions are removed from opposite edges.

For full details and re-sizing limitations please contact the sales office.

Supporting General Product Information – Internal Doors

Masonite in the UK manufacture a wide variety of door styles and specifications. Please reference specific product information to confirm specification is suitable for the intended use. All products are supplied with specific installation and care and maintenance instructions.

Visit www.masonite.co.uk or contact the customer services or sales teams for more information on 0844 209 0008.

Door Thickness

Imperial doors: 35mm (1 ⅜") or 44mm (1 ¾")
Metric doors: 40mm
Fireshield doors – FD30: 44mm (1 ¾")
Firemaster doors – FD60: 54mm (2 ⅛")

Core Specification*



Standard Core: A multi-cell or spacer pad core for light duty, non-fire rated applications. Specification for catalogue standard core interior and exterior door types.



Semi Solid Core: Offering additional weight and stability to the 35mm Standard Core door.



Safe 'N' Sound: Solid core material in a standard 35mm thick door.



Solid Core: A 35mm solid core construction provides the extra benefits of added strength, durability and flexibility.



Moulded Fireshield FD30: A high density particle board surrounded by timber framing. This specification may be used on Fireshield and Firemaster doors at our discretion.



PremCor FD30 / FD60: PremCor is a high-density particle board core material that does not require perimeter timber framing. This design (when fitted with correct and compatible fire resisting components) is third party certified by CERTIFIRE. This specification may be used on Fireshield and Firemaster doors at our discretion.



Framed FD30: A high-density particle board fire door core surrounded by timber framing. This proven design (when fitted with correct and compatible fire resisting components) is third party certified by CERTIFIRE. This specification may be used on Fireshield and Firemaster doors at our discretion.

*Actual core construction may vary.

Non-Standard Sizes

Non-standard sizes are available on Moulded, Portfolio, Standard Veneer and Paint Grade Plus doors.

30-minute fire doors (up to 2400 mm tall) Paint Grade Plus doors are available upon request.

For further details please contact the sales office.

Pair Maker Kit

Available in White or Oak, suitable for use on 35mm internal doors only.

White: Code 61569

Oak: Code 61570

Fire Doors

Fire doors are tested to relevant British standard or European standards and are third party certified by Warringtonfire, under the CERTIFIRE scheme. Premdor Crosby and Door-Stop International are members of the BWF Fire Door Alliance.

All fire door leaves must be hung in the correct and compatible frame and fitted with the correct and compatible components, glazed apertures, including intumescent protection and ironmongery.

Glazed Fireshield doors are supplied with clear (unwired) fire resistant glazing systems as standard, unless further options are available.

Please refer to relevant certificate and data sheet available from the Certifire website.

Resizing

Standard Core doors and fire doors must not be resized from the top edge as this will remove or damage the fire door label/s and traceability markings. The amount of material that our internal doors and fire doors can be resized on the stiles and threshold edge varies depending on door design and configuration.

Fire doors that are resized in excess of the specified limitations will invalidate third party certification.


Always reference the specific limitations on resizing fire doors by referencing the certificate and data sheet available from the Certifire website.

Standard core doors that are resized in excess of the limitations may affect performance. Always reference the specific limitations detailed on the accompanying product documentation and installation instructions.

Lock Blocks

Standard core doors have a single lock block. The side of the door that the lock block is located is indicated by inkjet markings on the top edge of the door. Always check the location of the lock block before starting installation.

Refer to specific product information regarding compatible ironmongery specification, height and size of lock block and fitting instructions for ironmongery.

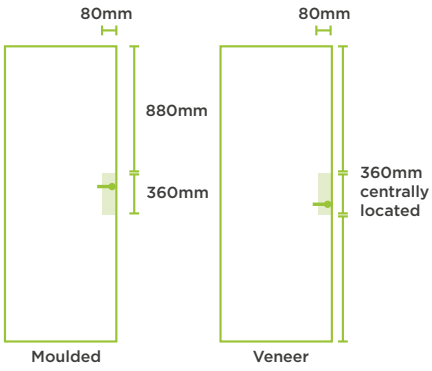

Building Regulations

It is the building designer's responsibility and not that of Masonite, to ensure that the correct fire door complies with the relevant Building Regulation guidance, and that the correct specification is used for the particular development, construction or building type used in the building.

Mobility

The range includes size options and glazing designs suitable for use under Approved Document M.

Warranties

Warranties are subject to the products being handled in accordance with our instructions for storage, handling, installation, inspection, maintenance and use, and exclude ironmongery where applicable.
Failure to follow these instructions may invalidate your warranties.

This does not affect your statutory rights.

Please refer to specific product terms and conditions and warranty information for further information.

Environmental and Sustainability Commitment

Our manufacturing and central warehouse facility in the UK is located at Barnsley and has been independently third party accredited to meet the environmental management standard ISO 14001.

All of our timber-based material suppliers are obligated to ensure that, wood is sourced in accordance with local legal forestry and logging controls and is EUDR and UKTR compliant.

The majority of timber used in our manufactured products is certified under, license numbers FSC® (FSC-C016232), PEFC (PEFC/16-37-346), FLEGT, approval.

Please contact us for more information relating to specific door styles, designs and certifications.

Storage and Handling

Doors should be stored and handled as described in our instructions and in accordance with the BS Code of Practice, BS 8000:5 1990.

Doors should be stored flat on a minimum of three equal thickness bearers located along the door length to evenly distribute weight, avoid movement and avoid damage.
Product must be kept dry and clean until immediately before finishing.
Take care to ensure damage does not occur during moving or handling of doors. Do not store doors or components outside. Do not store doors or components or install in an area that may be subject to extremes of temperature or humidity. Use a dry, well ventilated building, in areas that have not been recently plastered.

It is recommended that unfinished doors be inspected for damage, fully sealed as soon as practicable after delivery. They should be sealed or primed on both faces and all four edges, and should then be fully finished, preferably before installation.

Do not paint over labels or product markings. Fire door labels should not be painted over, removed or damaged.

Do not store or install in an area that may be subject to extremes of temperature or humidity. Use a dry, well ventilated building, in areas that have not been recently plastered.

It is recommended that precautions are taken to prevent moisture content build up of timber parts. Particular care is needed in centrally heated or air-conditioned buildings as the rapid change of temperature or moisture (e.g. air conditioning or central heating) can be detrimental to joinery.

It is important that any protective packaging material be left on the door for as long as is practically possible to avoid damage to door surfaces.
This is particularly relevant to fully finished products.

It is recommended that if the finish is broken in any way (e.g. trimmed, drilled or cut for hinges etc.) any such exposed area should be sealed and refinished immediately.

Finishing

Decoration should be carried out in accordance with and as described in our installation instructions and in accordance with the manufacturers instructions of the chosen finish. Manufacture and relevant parts of BS 6150 and BS 8000 Part 5.

Products must be clean and dry prior to finishing, and ensure that moisture content equal to the conditions of the intended installation location.
Always follow the manufactures instructions provided with the finishing system that is to be applied.

It is important that the finishing system is balanced by equal application to both sides at the same time to ensure that an imbalance of moisture does not occur, particularly in the decoration of doors.

The complete surface area should be fully treated with topcoat paint prior to installation. All edges and any areas that have been cut, drilled, should be fully finished to limit moisture ingress.
Always follow the instructions of the specific finishing product and do not paint over fire door labels.

Masonite in the UK has no control over customer applied finishes of doors and therefore cannot accept any claims for issues/problems of any type relating to customer finishing of the doors.

Do not to use oils (e.g. Danish oil), waxes, polishes or dyes, as they may not adequately seal the door. Coatings must be regularly maintained to prevent a breakdown of the protective surface finish, which could lead to deterioration of the door.

Installation

Doors should be installed as described in our installation instructions and in accordance with the relevant parts of BS Code of Practice, BS 8000:5 and BS 8214 (fire door installation).

Fire Door Installation

Always refer to the specific installation instructions for the specific product. Instructions are supplied with the product and are also available at www.masonite.co.uk

Further information regarding installation methods is provided in the fire door certificates, and data sheets specific to the product being installed. It is important to always follow the instructions to ensure certification is maintained. Certificates and data sheets can be accessed from the Warringtonfire website.

Incorrect installation, the use of incompatible (non certificated) components, or exceeding limitations detailed on the specific accompanying certificate or data sheet will invalidate certification and can affect product performance and may present a safety risk.

The Fitting of Ironmongery

When fitting locks and latches in fire and non-fire doors, it is important to ensure that the construction and performance of the door is not adversely affected.
Ensure you follow the relevant installation instructions and supporting product documentation, including the certificate ad data sheet to confirm location, fixings and any additional intumescent protection required.

The Selection and Fitting of Ironmongery and Intumescent Protection in Fire Doors

Information regarding compatible components, method and location of fitting ironmongery and associated intumescent protection and seals is provided in the fire certificate and accompanying data sheet.

Some items of ironmongery require additional intumescent protection. Reference the fire door certificate and accompanying data sheet to ensure compatible intumescent product and fixings are used, in the correct location.

Exceeding any of the limitations or using incompatible components will invalidate certification and may affect product performance and may present a safety risk.

Glazed Apertures in Fire Doors

Fire doors must not be glazed on site, as this will invalidate certification, may affect product performance and present a safety risk. Always order fire door product with glazed apertures as Masonite in the UK offers a wide variety of glazed aperture styles and designs. Please reference specific product information for available specifications or contact us for further information.

It is recommended that any glazed aperture requirements are highlighted at time of ordering to ensure the work is undertaken under the factory production control system and certification is maintained. Premdor Crosby, part of the Masonite group is third party certificated by Certifire for the preparation and installation of components into apertures in fire doors, doorkits and doorsets.

Other Apertures in Fire Doors

Fire doors may be required to contain a number of other apertures for items such as eye viewers, letter plates, and air transfer grilles or other items or ironmongery; however, there are specific limitations related to these components. These limitations can include the specification of compatible component, the location, fixings and intumescent protection where required. The certificate and data sheet should be referenced to ensure all limitations are upheld and certification is maintained. Exceeding these limitations may invalidate certification and impact on product performance.

Please highlight any other aperture requirements at time of order to ensure the work is undertaken under the factory production control system and certification is maintained.

Exceeding any of the limitations or using incompatible components will invalidate certification, may affect product performance or present a risk to safety. Please reference the certificate and data sheet, available to download from the Warringtonfire website.

General External Door & French and Folding Doorset Specification

External Flush & Glazed Fire Doors

Door Specification

Standard Core doors: 44mm (1 ¾")
Fireshield doors – FD30: 44mm (1 ¾")
Firemaster doors – FD60: 54mm (2 ⅛")

Construction

External Flush doors are lipped on both long edges with additional timber blocks to support the fixing of ironmongery.

Recommendations

Doors used in exterior positions can face particularly harsh environmental conditions.

Porches or canopies can provide additional protection. It is recommended that regular maintenance is undertaken on the surface finish, to ensure that a suitable level of protection is maintained, and to limit damage or distortion.

Glazing

Standard Core doors (non-fire) are supplied aperture only (unglazed).

All Fireshield FD30 doors are supplied with clear wired fire rated glass to maintain certification.

Glass openings have equal side margins.

Beading

Unglazed (non-fire) flush doors are supplied with bead packs as standard.

Door Finishing

Flush doors are ready for on-site paint finishing and must be fully finished on faces, all edges and ironmongery rebates before installation.

Factory priming is available on F1X face only.

There can be no guarantee against moisture ingress/loss related problems (such as swelling, shrinkage, wrapping, splits and open joints) if the door is not correctly coated with a quality exterior door finish specifically formulated to protect exterior doors.

It is recommended not to use non-permeable coatings on exterior doors. If using a water-based product, this may lift the fibers of the timber veneer. It is also not recommended to use stain, waxes, polishes, dyes or oils (e.g. Danish oil) as they do not properly seal the door and can lead to delamination of the veneer. Do not apply varnishes to the door as due to resinous nature of some hardwoods there can be adhesion problems causing a breakdown in the coating.

Doors are not treated with preservative. Decoration must be carried out in line with BS 6150 and BS 8000 Part 5.

Weather Protection

To ensure door and door frame provide adequate performance in exposed situations, it is recommended that installation is within a porch or canopy. This is particularly critical with open in doors and pairs.

Letter Plates

Please ensure all letter plates are installed in line with the relevant fire certification and are Certifire approved fire resisting design.

Warranties

Warranties are subject to the products being treated in accordance with our instructions for storage, handling, installation, maintenance and use and exclude ironmongery where applicable.

Failure to follow these instructions may invalidate your guarantee and invalidate certification. This does not affect your statutory rights.

Please refer to specific product and component guarantees for further information.

French and Folding Doorset Specification

Construction

Doors are 54mm thick. Doors and frames are manufactured using an engineered timber construction and have a hardwood core and 1.2mm thick oak or hardwood timber veneer on each visible surface.

Sets are supplied complete with doors, frame, cill, hardware, threshold, locks, handles, weather and draught seals.

Oak folding doors are supplied with a fully finished oak cill, hardwood folding doors are supplied with a fully finished hardwood cill both with aluminium sub cill for drainage.

Finished Frame Sizes

The finished frame height is 2090mm for both French and folding doorsets.

Handing

French sets open outward and are not reversible. The left door is the slave door (viewed from the outside) and the door to the right is the access door (viewed from the outside). Bifold sets are open outwards and are reversible.

Glazing

The 24mm double glazed units incorporate special Low 'E' thermal glass with an argon filling to enhance the thermal performance, the double-glazed units are fitted into the doors so there is no glazing required on site.

Please contact Masonite for further information regarding glass specification, including safety requirements.

Hardware

Folding doorsets are supplied with polished chrome handles and stainless steel hardware.

French doors are supplied with zinc alloy concealed hinges with polished chrome handle.

All sets incorporate a 3 point insurance rated PAS 23/24 tested lock on the main access door and lockable slide bolt on the inside.

Fitting

All sets are supplied unassembled for on-site assembly with full fitting instructions included.

Finishing

The sets have been factory finished with 3 coats of high-build microporous finish applied and ready to install on site without further finishing. The finish incorporates UV protection.

It is very important that the finish on your doorset is inspected and maintained regularly. This will maintain the protective finish.

The length of time between re-coating depends greatly on exposure to weather and the direction the sliding/folding doors face. The coating will last longer in a sheltered position. However, if the site is south facing, or in a heavy weather exposure area, we recommend checking for break down regularly after purchase and re-coating if necessary.

We recommend that your doorset is maintained and refinished using suitable medium or high-build exterior grade wood finishes. In addition, it's better to refinish as soon as you see any breakdown of the finish. Don't wait until it's too late and the finish has completely broken down as this may allow moisture into the timber and affect the performance.

We do not recommend the use of yacht varnish, waxes or oil applications to pre-finish our doorsets for external use.

Weather protection

All our sets incorporate double weather and draught seals.

Thermal efficiency

The Building Regulation Part L rating of the whole set is 1.4 (FD) & 1.4 (bifold) W/m2•K which passes the regulations for refurbishment, extensions to existing dwellings or new build homes. The Low 'E' glass used has a 1.1 W/m2•K rating.

Please note that the 'U' values are indicated alongside products for guidance only. Values shown are independently tested by an accredited testing company. The 'U' value indicates thermal efficiency (W/m2•K). The lower the rating can result in greater energy saving. For further information see relevant Building Regulation guidance.

'U' Values

Bifold
Part 'L' 1.4 W/m2•K, Glass 1.1 W/m2•K

French Door
Part 'L' 1.4 W/m2•K, Glass 1.1 W/m2•K

Guarantees

Guarantees are subject to the products being treated in accordance with Masonite instructions for storage, handling, installation, inspection and maintenance and use, and exclude ironmongery where applicable. Failure to follow these instructions may invalidate your guarantee and invalidate relevant certification of the product. This does not affect your statutory rights.

Guaranteed for 10 years against door and hardware manufacturing defects.


Factory fitted glass carries a 10-year guarantee.

Handing and Brickwork Sizes


Choose between left and right handing – There is no need to order left or right opening sets as our folding sets are all reversible and this can be chosen when the set arrives on site. All our folding doors fold outside to allow maximum use of space in your room.

Brickwork sizes and how your folding doors open.

3 door configuration
6' Brickwork size 1800 x 2100mm
7' Brickwork size 2100 x 2100mm
8' Brickwork size 2400 x 2100mm
9' Brickwork size 2700 x 2100mm




Looking from outside right hand opening




Looking from outside left hand opening

4 door configuration
10' Brickwork size 3000 x 2100mm




Looking from outside right hand opening




Looking from outside left hand opening

5 door configuration
12' Brickwork size 3600 x 2100mm




Looking from outside right hand opening



Looking from outside left hand opening

6 door configuration
14' Brickwork size 4200 x 2100mm
16' Brickwork size 4800 x 2100mm



Looking from outside

External Door Storage, Handling, Installation, Maintenance and Use

Storage and Handling

Doors and doorsets should be stored and handles as prescribed in BS Code of Practice BS 8000 5 1990.

Doors and doorsets should be kept dry and clean inside the polythene packaging until immediately before painting/staining. Do not store or install in an area which may be subject to extremes of temperature or humidity. Use a dry well ventilated building in areas which have not been recently plastered.

Doors that are destined to be installed in environments that have high temperature or humidity environmental range should be slowly conditioned to the intended environment to avoid warping or distortion.

Please inform us at the time of tender and order whenever doors are needed for such buildings.

The testing and rapid switching on and off of heating during the construction is detrimental to joinery.

Doorsets are heavy. Make sure that there is sufficient labour to handle doors and components.

- Ensure that employees are trained in manual handling heavy objects.
- Doorsets must be lifted evenly and securely to avoid any bending or damage of components or frames.
- Protective wrapping should be kept in place as long as possible.
- Consider fully any handling risk, including danger from glazed panels.

Installation

It is essential that doors be fully sealed and any air gaps plugged immediately after delivery. They should be sealed and knotted and primed on both face and all four edges, and should then be fully finished, preferably before installation. Any surface subsequently cut should be fully finished before the door is fixed into position, this particularly applies when end grain is exposed. This may not detract from the protective performance; however, a regular regime of maintenance should be undertaken to ensure natural wear and tear of surface finishes is maintained to ensure performance.

It is essential that if the preservative seal is broken in any way (e.g. trimmed, drilled or cut for letterbox, hinges etc.) then any such exposed area should be preservative treated, painted or stained.

Decorative Finished Products

Coated surfaces require regular maintenance and cleaning at least annually to remove surface pollution. Some 'chalking' of the finish may occur over time due to natural erosion of the microporous paint finish.
This may not detract from the protective performance; however, a regular regime of maintenance should be undertaken to ensure natural wear and tear of surface finishes is maintained to ensure performance.

On occasion timber can exude natural resins that can appear after installation. This is a natural process and can be limited by selection of appropriate surface finishing system.

Discolouration can occur which will require attention and maintenance to retain the aesthetics and integrity of the coating. On occasion timber products may exude resin after installation. Typically if resin is present this 'bleeding' cannot be prevented. Discolouration can occur which will require attention and maintenance to retain the aesthetics and integrity of the coating. Resin exudation is excluded from our performance guarantee.

Environmental conditions and exposure can vary significantly according to location. South facing elevations and coastal sites will reduce to some extent the finish life to first maintenance. Our guarantees are intended to cover reasonable average UK conditions.

Finishing

Decoration should be carried out in accordance with and as described in our installation instructions and in accordance with the relevant part of BS 6150 and BS 8000 Part 5.

Products must be clean and dry prior to finishing, having a moisture content which is no greater than the average for the intended location. Always follow the manufacturer's instructions provided with the stain or paint which is to be applied.

The use of dark coloured paint finishes should be avoided on all softwood external joinery to avoid adverse deterioration due to exposure to high temperature environmental conditions. A neutral colour undercoat should be considered when it is desired to finish frames in pastel shades.

It is important that the finishing system is balanced by equal application to ensure that an imbalance of moisture does not occur, particularly in the decoration of doors.

The complete surface area should be fully treated with a suitable topcoat paint or stain prior to installation.

To ensure adequate coverage at least three coats of topcoat paint/stain needs to be applied. All edges, rebates for glazing and any areas which have been cut, drilled, etc. must be fully painted/stained to the same standard as the rest of the door.

It is recommended not to use oil (e.g. Danish oil) waxes, polishes or dyes as they do not properly seal the door and can lead to delamination of the veneer or surface fibers.

Coatings must be regularly maintained to prevent a breakdown of the protective paint or stain finish which can lead to moisture ingress/loss and deterioration of the door.

Maintenance

At annual intervals or more frequently if necessary, inspect and lubricate all ironmongery, hinges, pivoting and sliding parts. Inspect the condition of the decorative and glazing systems on all external joinery at maximum intervals of one year and carry out remedial work as required.

Please contact us for detailed information regarding specific care, maintenance and inspection requirements, including the compatible specification of replacement parts.

Weather protection

It is recommended that exterior doors which are in exposed areas should be protected by a canopy or porch.

Please note: Finger-jointed materials may be used in manufacture, enhancing product stability.

P12
New Arrivals
Worth a Second Look

P18&19

Portfolio Light Grey
and Charcoal Doors

P20
Veneered Doors

P28

Shallow 2 & 3 Panel Moulded

P32

Vertical 5 Panel
Moulded Smooth

P43

Vertical 5 Panel Half Light
Clear Etched Glazed

P60

Premdor Doorsets

Index

#	
1 Panel Smooth Glazed Moulded	42
1 Panel Smooth Moulded	30
2 Panel Arch Top Textured Moulded	34
2 Panel Smooth Moulded	34
2 Panel Shallow Moulded	29
3 Panel Shallow Moulded	29
4 Panel Bi-fold Textured	36
4 Panel Smooth/Textured Moulded	35 & 36
5 Panel Smooth Glazed Moulded	43
5 Panel Smooth Moulded	37
5 Panel Vertical Glazed Moulded (Half and Full Light)	43
5 Panel Vertical Smooth / Textured Moulded	33
6 Panel Bi-fold Smooth/Textured	39
6 Panel Smooth/Textured Moulded	38 & 39
A	
American Black Walnut Flush Veneer	24
American White Oak Flush Veneer	23
Anegre Flush Veneer	22
Apartment Entrance Doorsets	76
Ash Flush Veneer	24
B	
Beech Flush Veneer	22
Bi-fold Interior Doors	36 & 38
C	
Canadian Door Range	45
Charcoal 4 Line Horizontal	19
Charcoal Horizontal	19
Communal Doorsets	72
Contact Us	122
D	
Defining Doors	8 & 9
Door-Stop International	94 - 99
Doorsets	62 - 105
Door-Stop International Fire Doorsets	88
Duel Certified Doorsets	88
Durador Vertical	16
E	
European Ash Flush Veneer	24
External Doorsets	90 - 105
External Fire Doorsets	88
External Flush	53
External French & Folding Doorsets	106 - 111
F	
F1X Flush – External	53
F2X Flush – External	53
F4X Flush – External	53
Flush Glazed Fire Doors – Options & Styles	56
Folding – External	109 & 111
French – External	108 & 110
G	
Glazed Canadian Range	45
Glazed Fire Door Range	54 - 61
Glazed Manhattan Range	46 & 47
Glazed Moulded Range	40 - 47
H	
Horizontal 4 Line Smooth Glazed Moulded	44
Horizontal 4 Line Smooth Moulded	31
I	
Integral Garage Doorsets	82
Internal Doorsets	62 - 87
Internal Flush Paint Grade	48 - 52
Internal Flush Veneers	20 - 25
Internal Moulded Door Range	26 - 47
K	
Koto Flush Veneer	22
L	
Ladder Smooth Glazed Moulded	43
Ladder Smooth Moulded	30
Light Grey Horizontal	18
Light Grey 2 Stile	18
Light Grey 4 Line Horizontal	18
Lipped Paint Grade Plus	51
M	
Manhattan Glazed Moulded	46 - 47
Manitoba 6 Light Glazed Moulded	45
Moulded Panel Door Range	26 - 47
Moulded Glazed Range	40 - 47
Moulded Glazed Fire Doors	61
N	
O	
Oak French & Folding Doorsets	108 - 109
Oak 2 Stile	16
Oak Flush Veneer	23
Oak Vertical	16
Ontario 10 Light Glazed Moulded	45
Option Plus	112
P	
Paint Grade Plus & Paint Grade Plus Lipped	51
Popular Paint Grade Lipped Glazed Fire Doors	60
Popular Paint Grade Lipped	52
Portfolio Doors	14 - 19
Product Ranges	5
S	
Sapele Flush Veneer	24
Secured by Design Doorset	76 - 81
Sliding (Folding) Doorsets – External	109 & 111
Shallow Moulded 2 Panel Smooth	29
Shallow Moulded 3 Panel Smooth	29
Solidor	100 - 105
SoundSecure Doorsets	76 - 81
SpeedSet Doorsets	68 - 71
Steamed Beech Flush Veneer	22
Stocking Policy	13
Storage, Handling & Installation	119
T	
Technical Information	114 - 119
Trends	10 - 11
V	
Veneer Flush Range	20 - 25
Vertical 5 Panel Textured Glazed Moulded (Half and Full Light)	43
Vertical 5 Panel Smooth / Textured Moulded	33
W	
Walnut Flush Veneer	24
Walnut Vertical	17
Walnut 2 Stile	17
What's New	12
White French & Folding Doorsets	110
White Oak Flush Veneer	23

Contact Us

To place or enquire about an order use the details below:

MASONITE®
DOORS THAT DO MORE™

PREMDOR®

Premdor Internal Doors, Internal Doorsets, French and Folding

Address:
Premdor, Birthwaite Business Park, Huddersfield Road, Darton Barnsley, S75 5JS

Telephone:
0844 209 0008*

Facsimile:
0844 371 5334*

For orders / order amendments email:
barnsleysales@masonite.com

For general enquiries email:
customerservices@premdor.com

Website:
masonite.co.uk

door-stop®

External Doorsets

Address:
Door-Stop International Limited
Export Drive, Huthwaite
Nottingham, NG17 6AF

Telephone:
01623 446336

Email:
sales@door-stop.co.uk
partsorders@door-stop.co.uk
customerservices@door-stop.co.uk

For orders / order amendments email:
doors@door-stop.co.uk

Website:
door-stop.co.uk

Solidor®

External Doorsets (Retail Enquiries)

Address:
Meir Park, Whittle Road,
Stoke on Trent, ST3 7TU

Telephone:
01782 847300

Email:
enquiries@solidor.co.uk

Website:
solidor.co.uk

Stocking Policy

Green Tint Flashed items are available from stock on a 3 day lead-time from key order date, terms and conditions apply, see page 123 for further details.

* Please be advised that calls to our 0844 number may incur additional charges.

These charges may include both a service and access charge. We recommend checking with your provider for specific rates before making a call, as costs may vary depending on your tariff.

How to Code Your Internal Door Order

Internal Door Orders

1. Select the numeric code for the chosen door; Interior 6 panel moulded 762 x 1981 x 35mm = 12411
2. Select any options required e.g. white factory paint face finishing.

How to place your order

Orders can be placed in various ways:

1. Order by fax.
2. Order by post.
3. Order by email.
4. Order by E.D.I. (contact us for details).

The information needed to process your order:

1. Your company name and address.
2. An order number.
3. A postcoded delivery address (including a contact name and telephone number).

For each item ordered:

1. The product and any option.
2. The quantity required.
3. The price per unit.
4. Quotation number if relevant.

General Information

Stocking Policy Terms & Conditions

Green Tint Flashed items are available from stock on a 3 day lead-time from key order date. This lead-time may vary subject to quantity of doors ordered and available stock at time of ordering.

Amendments and Cancellations

Any order amendment or cancellation will not be accepted without prior written agreement, and a charge will be levied for any specific costs incurred.

Delivery

Masonite in the UK delivers across mainland UK on a published multi-drop schedule based on key order days for the delivery address postcode area. Please note that delivery dates may change and will vary around bank holidays. Details of the current delivery arrangements can be obtained from Masonite (UK).

Please supply post code details when ordering to avoid unnecessary delay.

Premdor Crosby Limited reserve the right to amend or implement carriage charges, minimum order quantities and storage costs for deliveries to yard or site (including charges for scheduled deliveries that are rejected at delivery point).

For site deliveries please contact the sales office for prices and terms and conditions.

Delivery Lead-Times

Delivery lead-time indications are given subject to the availability of materials and production loadings. Whilst every effort will be made to achieve these dates, they may vary without notice.

After Sales

Masonite in the UK prides itself in providing a complete after sales package. Our after sales service can be contacted through the Sales Office or email customerservices@premdor.com

Environmental Chain of Custody

Please note that where products are supplied with third party environmental accreditation, it is the purchaser's responsibility to ensure continuity of certification as required through the supply chain.

Marketing Information

Reproduction

Drawings and photographs are intended as being illustrative only and do not represent a product offering. Colours and photographs depicted are as accurate as photographic and printing processes can allow.

Illustrations

Products are shown glazed and fully finished for illustration purposes only. To confirm details for particular products please check within the relevant specification section.

Catalogue Supplies

For merchant customers who wish to receive copies of our catalogues, please request via masonite.co.uk

Sample Swatches

Masonite offer a wide selection of sample swatches to help you make the right choice. To order visit masonite.co.uk

Trade Descriptions Act 1968

In the interest of continuous product design and improvement, Masonite in the UK reserves the right to alter specifications and descriptions or withdraw products without prior notice.

The current specifications of any product are available on request and whilst every effort is made to produce up to date literature, this catalogue should only be regarded as a guide to current specifications.

It does not constitute an offer for the sale of any particular product.

Terms & Conditions

To view please visit Masonite.co.uk/terms-and-conditions

MASONITE
DOORS THAT DO MORE™

Premdor®
Internal Doors

Door-Stop International®
Composite Doorsets

Portfolio
Internal Premium
Veneered Doors

Solidor®
Composite Doorsets

Premdor Doorsets
Internal & Apartment
Entrance Doorsets

Version 4.0 - October 2025