Creda

HEATING

Product Catalogue **2025**

About Creda Heating

Creda Heating has over 40 years of experience in providing safe, clean and efficient heating products that offer specifiers, installers and users an attractive and simple range, compliant with new legislation and regulations.

It's easy to specify and install Creda's reliable and responsive heating into both domestic and commercial buildings.

BEAB Approved

Intertek

Ecodesign Compliant

With access to an expert sales and after-sales support team, Creda works nationwide to provide maximum convenience for customers:

- Over 40 years' experience in heating
- Designed to comply with regulations including Lot 20
- Access to expert sales and after-sales teams
- Maintenance-free product range



TSRE Storage Heater

An advanced electric storage heater with a clean look and reliable performance, providing an upgraded and compliant replacement for older storage heaters.

Controls

Digitally controlled electronic thermostat accurate to (±0.2°C). Setpoint range (7-26°C).

Timer modes: 7-day programmable user timer,
Out All Day, Home All Day, Away

- Graphical display with white backlight
- Touch-sense buttons with audio feedback
- User replaceable battery (coin-type)

Controller Functions

- Open window detection
- Boost mode and settings
- History/reporting
- Automatic charge control
- Bluetooth for software updates
- Child lock

Safety Features

- Electronic overheat protection
- Additional electromechanical overheat protection
- LVD and EMC compliance

IPX4

2 Year Guarantee

Colour/Finish

Traffic White (RAL9016), Grille - RAL7035 anodised.

Supply

1/N/1/N/PE (off-peak + peak) ~230-240V / Hz


Key Features

- Complies with Lot 20 of ERP Directive
- Efficient heating system with low running costs delivered by maximising the use of off-peak tariffs
- Dynamically stores the right amount of energy to heat a room
- Controllable electronic heat output to match user lifestyle
- Fan assisted to quickly, quietly and more effectively distribute heat
- Supplied with 40mm feet for weight distribution when secured to wall, two feet positions available
- Slimline design that covers traditional storage heater fixing marks



TSRE050

Dimensions (mm)

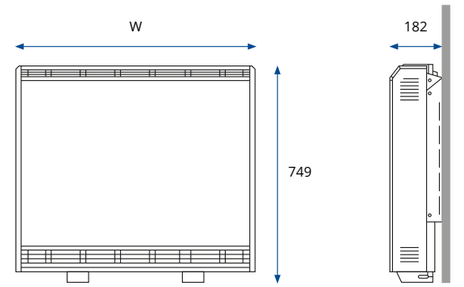

Model No.	Rating		Energy Cell Packs Required	Dimensions			
	Input (kW)	Output (kW)		Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
TSRE050	1.02	0.5	4	749	581	182	63
TSRE070	1.56	0.7	6	749	703	182	85
TSRE100	2.22	1	8	749	825	182	107
TSRE125	2.76	1.25	10	749	947	182	133
TSRE150	3.3	1.5	12	749	1069	182	155

CPHT Panel Heater

Creda's Lot 20 compliant CPHT panel heater boasts a Scandic-inspired design with easy-to-use intuitive user controls.

Controls

- Digitally controlled electronic thermostat
- 15° viewing angle control panel for easy programming

Controller Functions

- Adjustable max temperature range (5-30°C)
- 7 day timer
- Adaptive start technology
- Four programme periods per day

Safety Features

Thermal cut-out. Auto reset type.

Colour/Finish

Metal chassis, air outlet grille & control moulding—Traffic White.

Supply

1.3 metres fitted for spur connection.

~230-240V 50Hz, Class I.

Construction

Durable epoxy-polyester powder coated steel casing.

Installation


H-frame wall bracket for easy fixing.

Key Features

- Seven-day electronic timer and temperature control with four time blocks per day for complete flexibility
- Full on-board control via integral control panel with LCD display and battery back-up
- Top outlet grille for optimum heat circulation
- Child lock to prevent tampering



Dimensions (mm)

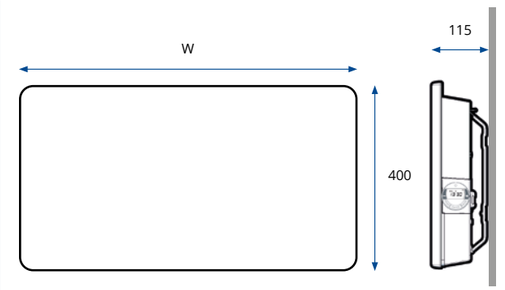

		Dimensions			
Model No.	Output (kW)	Height (mm)	Width (mm)	Depth (mm)	Weight (kg)
CPH05T	0.5	400	425	115	3.4
CPH10T	1	400	525	115	3.8
CPH15T	1.5	400	625	115	4.6
CPH20T	2	400	925	115	6.5
CPH24T	2.4	400	925	115	6.5

IP20

2 Year Guarantee



CTR Towel Rail

A stylish ladder towel rail range with 2025 Lot 20 compliant integrated time and temperature programmer. Available in three sizes and white or chrome finishes.



Element

Submersion element with temperature limiter and fuse link.

Thermal Cut-Out

Built-in temperature limiter and overheat protection.

Colour/Finish

Chrome plate or white stove enamel.

Supply

Class 1, 3 core cable – live, neutral, earth.
Cable entry on bottom right.

Controls

- Electronic thermostat (7-28°C)
- 7 day timer: three preset time profiles and three custom profiles
- Preheat mode: two periods to be set for same time each day
- Programmes remain in the event of power outage
- Boost (variable)

Controller Functions

- Open window detection
- Keypad lock

Construction

Mild steel, straight horizontal bars, vertical mounted heating element.

Key Features

- Easy and quick to install
- Integrated 2025 Lot 20 compliant timer located at the base of the towel rail for ease of programming
- Timer with three preset time profiles and three custom profiles, additional 'preheat' mode enabling two periods to be set to come on for the same time each day
- Boost mode function
- Energy saving electronic thermostat accurate to ±0.1°C
- Open window detection




CTR10W



CTR10C

Dimensions (mm)

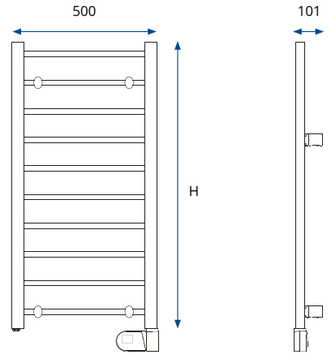

Model No.	Rails	Output (W)	Dimensions			Weight (kg)	Finish
			Height (mm)	Width (mm)	Depth (mm)		
CTR7C	7	80	692	500	101	5.4	Chrome
CTR7W	7	120	692	500	101	5.4	White
CTR10C	10	120	992	500	101	7.6	Chrome
CTR10W	10	175	992	500	101	7.6	White
CTR12C	12	175	1192	500	101	9.2	Chrome
CTR12W	12	250	1192	500	101	9.2	White

Support

Customer Contact


credaheating.co.uk/contact-us

Customer Support Team: **0344 879 3588**

Customer Support Opening Times:

Monday - Thursday: 08:30 - 17:00
Friday: 08:30 - 16:00
Saturday - Sunday: Closed

Cable Entry Points



TSRE - Storage Heater



CPHT - Panel Heater



CTR - Towel Rail

Product Guarantee Registration

Faster Customer Service

Once you have registered your product, our customer service team will be able to quickly access your details when you contact us, allowing them to help you sooner.

Guarantee Management

Upon registration, you will receive a confirmation email including a summary of your product guarantee, a copy of our terms and conditions and a copy of your proof of purchase (optional).

Product Recall Notification

If your product is registered you will automatically be contacted with applicable safety notifications, or in the unlikely event of a product recall.

Visit **credaheating.co.uk/register**
or scan this QR code:

Safety

Creda products are designed to comply with the requirement of EN60335 part 1 of the British Standard covering the safety requirements of electric heating appliances, and momentary contact with any part of the heater should not cause injury.

However, in order to be effective, heaters or towel rails of any type do get hot, especially (if applicable) around the air outlet grille. Therefore if aged or infirm persons, or young children, are likely to be unsupervised in the vicinity of a heater, we advise precautions should be taken. We recommend a guard is fitted around the heater, as is normal with many types of heating appliance in similar circumstances, to ensure contact with the heater is avoided and objects cannot be inserted into the product.

Heating appliances should never be covered or positioned where objects may fall onto them.

Installation Guidance

This brochure is not intended as an installation guide. For safety, products should only be installed by a competent person, in accordance with current regulations and the manufacturers instructions. Please note that the dimensions contained within this brochure do not in all cases include clearances required around installed products for safe operation.



To find out more about how our team can help you to specify compliant, efficient and intelligent solutions, contact us on **0344 879 3588** or visit **credaheating.co.uk.**

Creda
HEATING

Creda is a Glen Dimplex brand. Millbrook House, Grange Drive, Hedge End, Southampton SO30 2DF

All the products shown in this brochure are protected by intellectual property rights own by members of the Glen Dimplex Group on an international basis. The Glen Dimplex group of Companies will actively protect these rights.

© Creda. All rights reserved. Material contained in this publication may not be produced in whole or in part without prior permission in writing.

CH1124