THE FLOOR BELONGS TO YOU.

QUICK, CLEAN & EASY FLOORING INSTALLATIONS

SWITCH ON TO SWITCHTEC® TAPES.

UPLIFT, PREPARE, DPM, LAY AND TRAFFIC IN A DAY OR SIMPLY OVERLAY!



UZIN UTZ®

PRODUCTS, SYSTEMS & SOLUTIONS.

UZIN switchTec® is a range of self-adhesive tapes in roll format. All switchTec® products provide an alternative to wet adhesives or loose lay systems when installing floor coverings or skirting. Sigan® is one range of products from switchTec® whereby various floor coverings such as vinyl, luxury vinyl tiles and carpets can be fitted onto subfloors or existing floor coverings. Plurafilm Hydro is an innovative moisture-resistant tape that allows floors to be installed onto unheated damp cement screeds without any limitation on moisture. It is also possible for floors with underfoot heating, but prior commissioning is required.

CONTENTS

Why UZIN switchTec®?	**04-05**
Product Overview	**06-07**
Damp Screed System	**08-09**
Dry Screeds, Metal & Chipboard System	**10-11**
Floor Refurbishment System	**12-13**
The Art of Floor Systems	**14-15**



UZIN switchTec® is a revolutionary method of installing various floor coverings on subfloors or existing floors, and our UZIN Plurafilm Hydro tape provides an innovative solution for installing floors on damp cement screeds without any limitation on moisture!

Steve Dykes,
Head of Technical & Product Management




SIGAN

WHY UZIN SWITCHTEC®?

REPLACE FLOOR COVERINGS EASILY, QUICKLY AND CLEANLY

With switchTec®, it is possible to refurbish floors without causing unnecessary disruption or closing businesses. You can install a new floor covering onto a subfloor or an existing floor covering without removing the old one. Therefore, avoiding the typical disturbances caused when refurbishing floors, as well as helping save your clients time and money. Once applied, the installed areas can be trafficked immediately without any negative effect on the installed floor covering.



SAFE AND SUSTAINABLE

SwitchTec® allows you to install floors quickly, quietly and cleanly. When the time comes to replace the floor covering, it can easily be removed without leaving any residue. All switchTec® tapes are solvent-free, low in emissions, and EC1 Plus accredited, making them safe for you, your clients and the environment. All switchTec® are compatible with environmental building certifications such as BREEAM or LEED. UZIN Sigan is also part of the ECO_2CHOICE range of products, which include a proportion of raw materials made from bio-based origins rather than fossil fuels alone. This significantly reduces greenhouse gas emissions from the manufacturing of UZIN Sigan products.

ADHESIVE EXPERTISE AT UZIN

SwitchTec® products have been made and developed in Switzerland for over 50 years. During this time, various systems have been installed across millions of square metres. The tapes are durable, long-lasting and can be used over underfloor heating systems. SwitchTec® products are ideal for shops, offices, hospitals and homes.



	TRADITIONAL REFURBISHMENT	SWITCHTEC REFURBISHMENT
DAY 1	• Remove & dispose of old flooring • Remove adhesive residues • Prime • Apply smoothing compound • **Waiting time overnight**	• Apply the tape onto the old floor covering* • Install new flooring • Groove & weld the floor covering if required • **No waiting times and immediately load-bearing**
DAY 2	• Apply adhesive • Install floor covering • **Waiting time overnight**	
DAY 3	• Groove & weld the floor covering if required • **Setting time** (2 days)	
DAY 4	• **Setting time**	
DAY 5	• **Now load-bearing with furniture**	


*When applying onto existing floor coverings

THE BENEFITS FOR YOU WITH SWITCHTEC®:


- Clean, quiet and low-odour
- Suitable for sensitive environments
- Quick and easy to install
- No waiting time
- Floor coverings can be welded immediately
- Floor coverings are ready for foot traffic and can be used immediately
- Suitable for time-critical sites



INSTALLATION OVER SUBFLOORS

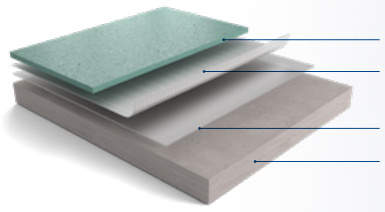

INSTALLATION OVER EXISTING FLOOR COVERINGS

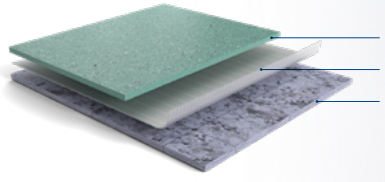

PRODUCT OVERVIEW

PRIMERS

UZIN PE 360 PLUS

Fast drying primer for new and old substrates.

+ Fast drying with excellent penetration
+ Reduces absorbency of the substrate and binds surface dust
+ Sustainable packaging

Pack size	Approx. Coverage	Drying Time*
5 kg 10 kg	33 – 63 m² 66 – 125 m²	30 – 60 min.

UZIN PLANUS

Quick drying primer for UZIN Sigan® or UZIN Elements.

+ Ready-mixed
+ For use over smoothing compounds, flooring grade chipboard or metal
+ Easy to apply

Pack size	Approx. Coverage	Drying Time*
5 kg	50 – 71 m²	Approx. 2 – 24 h**



SMOOTHING COMPOUNDS

UZIN L2 CONTRACT

Cost effective 2 part Smoothing Compound

+ Quick setting ready for fit on the next day
+ Excellent flow and workability
+ Suitable on substrates subject to residual construction moisture

Pack size	Approx. Coverage	Drying Time*
20 kg & 4.8 kg	5 m² at 3 mm	6 h

UZIN NC 151

Heavy duty Smoothing Compound

+ Quick, reliable and consistent drying
+ Dries on absorbent and non-absorbent substrates in 6 hours
+ Great flow, easy to spread and extremely smooth finish

Pack size	Approx. Coverage	Drying Time*
20 kg	5 m² at 2-3 mm	6 h

UZIN NC 196

Fibre-reinforced Smoothing Compound

+ Enriched with reinforcement fibres to reduce the formation of cracks
+ Excellent flow characteristics for ease of use
+ Low stress even when applied up to 40 mm

Pack size	Approx. Coverage	Drying Time*
20 kg	5 m² at 3 mm	24 h

UZIN NC 161

Moisture Tolerant Smoothing Compound

+ For substrates without a structural DPM or containing high residual moisture
+ It can be used before applying UZIN PE 404 moisture suppressant or UZIN Plurafilm Hydro
+ No limitation on pH and RH values
+ Resistant against alkaline moisture
+ Good flow characteristics

Pack size	Approx. Coverage	Drying Time*
20 kg	5 m² at 3 mm	24 h



*Approximate drying time at 20 °C / 68 °F and 65 % relative humidity ** See product data sheet



UZIN PLURAFILM HYDRO

Double sided moisture-resistant tape that allows LVT, vinyl, carpet or rubber to be installed onto damp cement screeds without any limitation on moisture.**

+ Quickest DPM system on the market
+ Simple and easy to use
+ Floors are immediately ready for use

Pack size	Approx. Coverage	Drying Time*
75 cm x 25 m & 5 cm x 25 m roll	20 m²	None, immediately ready

UZIN REMUR

Adhesive tape for skirting, capping and coving.

+ Reinforced with metal to prevent shrinkage and gapping
+ Quick, clean & easy installation
+ Extremely strong bond

Pack size	Dimensions	Drying Time*
8 rolls / pack	25 mm x 50 m	None, immediately ready
3 rolls / pack	95 mm x 50 m	

UZIN SIGAN

Double sided tape for installing new carpets & vinyl onto existing vinyl, linoleum, wood, laminate and terrazzo or smoothing compounds and chipboard.

+ Fast and easy to install
+ Immediately ready for foot traffic
+ Easily removable without leaving residues

Pack size	Approx. Coverage	Drying Time*
75 cm x 25 m & 5 cm x 25 m roll	20 m²	None, immediately ready

UZIN ELEMENTS

Double sided adhesive tape for installing luxury vinyl tiles onto existing vinyl, linoleum or smoothing compounds and chipboard.

+ Quick and easy to install
+ Strong bond
+ Removable without leaving residues

Pack size	Approx. Coverage	Drying Time*
75 cm x 25 m & 5 cm x 25 m roll	20 m²	None, immediately ready

UZIN U-TACK

Multi-Purpose Skirting Tape

+ Quick, clean & safe installation of skirting, capping and coving
+ Strong and secure bond
+ Solvent-free

Pack size	Dimensions	Drying Time*
1 roll / pack	25 mm x 50 m	None, immediately ready
1 roll / pack	40 mm x 50 m	
1 roll / pack	50 mm x 50 m	
1 roll / pack	85 mm x 50 m	





QUICKEST DPM SYSTEM ON THE MARKET!

Vinyl

UZIN Plurafilm Hydro Moisture-resistant Tape**

UZIN L2 Contract Cost Effective Smoothing Compound or
UZIN NC 161 Moisture Tolerant Smoothing Compound

UZIN PE 360 PLUS Primer

Cement screed with residual moisture up to 99.9% RH



UZIN NC 161 Moisture Tolerant Smoothing Compound

UZIN PE 360 PLUS Primer

Cement screed with moisture up to 99.9% RH

DAMP SCREED SYSTEM

When installing flooring in areas where subfloor moisture is a problem, traditional methods can take 3 or 4 days. UZIN continually develops new solutions to make flooring installations quicker and easier. With the innovative UZIN Plurafilm Hydro Tape, you can install LVT, vinyl, carpet or rubber floor coverings over damp cement screeds with moisture up to 99.9% RH in 1 to 2 days. Once the tape has been installed, it is immediately ready for foot traffic and use. The system is ideal for projects with time constraints or refurbishment work.

UZIN PLURAFILM HYDRO

MOISTURE-RESISTANT TAPE

With Plurafilm Hydro LVT, vinyl, carpet, or rubber floor coverings can be installed on unheated damp cement screeds without any limitation on moisture.** It is also possible for floors with underfoot heating, but prior commissioning is required. The innovative system prevents delays and long waiting times for the cement screed to dry.

Benefits:

- Rapid system
- No moisture measurement necessary
- Resistant to alkaline moisture
- Simple and easy to use
- Floors are immediately ready for use

Pack Size:	**Approx. Coverage:**	**Drying Time*:**
75 cm x 25 m & 5 cm x 25 m roll	20 m²	None, immediately ready

UZIN REMUR

SKIRTING, CAPPING & COVING TAPE

UZIN REMUR provides a superior method of installing skirting, coving and capping compared to hot-melt gluing, nailing or solvent-based adhesives. Unlike other contact tapes, UZIN REMUR is metal reinforced to prevent gapping and shrinkage. It does not become brittle, providing a secure and highly durable bond. UZIN REMUR allows you to fit skirting, capping and coving easily, quickly, and cleanly.

Benefits:

- Reinforced with metal to prevent gapping and shrinkage
- Quick, clean & easy installation
- Extremely strong bond
- Solvent-free

Pack Size:	**Dimensions:**	**Drying Time*:**
8 rolls / pack	25 mm x 50 m	None, immediately ready
3 rolls / pack	95 mm x 50 m	

* Approximate drying time at 20 °C / 68 °F and 65 % relative humidity
** See product data sheet





EASY REPLACEMENT OF FUTURE FLOORING COVERINGS

Vinyl


UZIN Sigan Tape

UZIN Planus Primer

UZIN NC 196 Fibre-reinforced Smoothing Compound, UZIN NC 151 Heavy Duty Smoothing Compound or UZIN L2 Contract 2 Part Smoothing Compound

UZIN PE 360 PLUS Primer

Dry cement screed

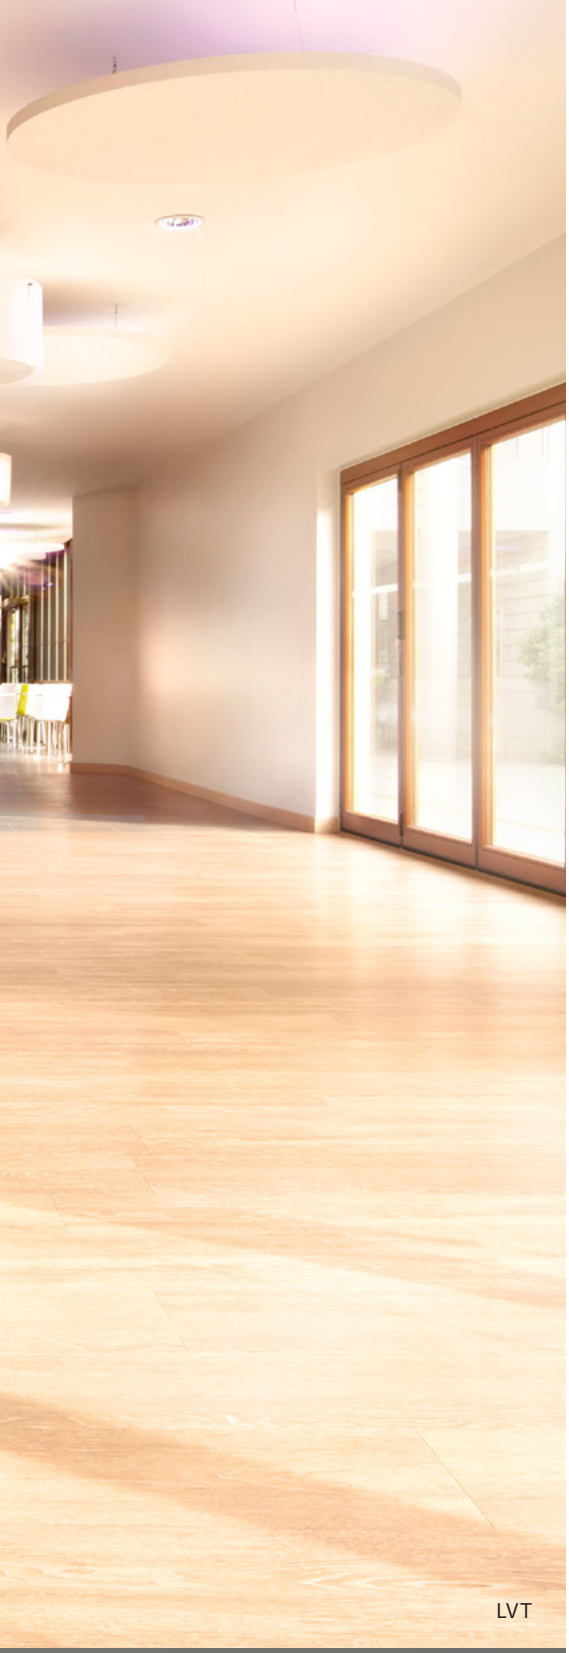

DRY SCREEDS, METAL & CHIPBOARD SYSTEM

SwitchTec® tapes allow carpet and resilient floor coverings such as vinyl and LVT to be replaced quickly and efficiently when refurbishment is required. Fast and flexible floor refurbishments are critical in newly constructed rental flats, offices or shops to avoid unnecessary closures or downtime between renovations. UZIN Sigan and UZIN Elements can be easily installed onto smoothing compounds, flooring-grade chipboard or metal when used in conjunction with Planus primer, and is guaranteed to leave no residues or damage to the substrate when the floor covering is removed.

UZIN SIGAN

HIGH PERFORMANCE TAPE

UZIN Sigan Tape allows vinyl, rubber or carpet to be installed onto smoothing compounds, flooring grade chipboard and metal after being primed with UZIN Planus. UZIN Sigan also allows vinyl or carpet to be installed onto terrazzo, vinyl, lino, wood or laminate and other resilient floors. UZIN Sigan protects the subfloor, and then years later, the floor covering can be replaced quickly and cleanly when refurbished.

Benefits:

- Quick, clean and easy to install
- Can be walked upon immediately after installation
- Easily removable without leaving residues
- Solvent-free and low-emission

Pack Size:	**Approx. Coverage:**	**Drying Time*:**
75 cm x 25 m & 5 cm x 25 m roll	20 m²	None, immediately ready

UZIN PLANUS

SYSTEM PRIMER

UZIN Planus is a versatile primer suitable for use over smoothing compounds, flooring-grade chipboard, or metal, ensuring that no residues or damage occur when the floor covering is removed.

Benefits:

- Ready-mixed
- For use over smoothing compounds, flooring grade chipboard or metal
- Easy to apply

Pack Size:	**Approx. Coverage:**	**Drying Time*:**
5 kg	50 – 71 m²	Approx. 2 – 24 h**

* Approximate drying time at 20 °C / 68 °F and 65 % relative humidity
** See product data sheet



QUICK AND EASY INSTALLATIONS OVER OLD FLOORS



Vinyl or Carpet

UZIN Sigan Tape

Old vinyl, linoleum, wood, laminate and terrazzo



UZIN Elements Tape

FLOOR REFURBISHMENT SYSTEM

Removing floor coverings requires an area or premise to be closed during the refurbishment because it is distributive, noisy and dusty, especially if the old floor has been adhered to the subfloor. With switchTec® Tapes, you can quickly, quietly and cleanly install a new floor covering onto an existing one without removing the old floor. Once installed, the new floor covering can be used and walked upon immediately. The tapes will leave no residues on the old floor when the floor covering is removed. The original floor can then be used again or serve as a substrate for new floor coverings. Therefore, the systems are designed to meet your client's needs to help save them the expense, time and potential loss of sales caused by closing down operations when refurbishing.

UZIN ELEMENTS

HIGH PERFORMANCE LVT TAPE

UZIN Elements offers a quick, clean and reliable solution for installing luxury vinyl tiles onto existing floor coverings such as vinyl, lino and other resilient floors. It can also be used in conjunction with UZIN Planus primer to install LVT onto smoothing compounds, flooring grade chipboard or metal. UZIN Elements helps prevent gapping and shrinkage as it is metal-reinforced to counteract the potential effects of plasticiser migration.

Benefits:

- Quick, clean and easy to install
- Prevents shrinkage and gapping
- Immediately ready for foot traffic
- Can be removed without leaving residues

Pack Size:	**Approx. Coverage:**	**Drying Time*:**
75 cm x 25 m & 5 cm x 25 m roll	20 m^2	None, immediately ready

UZIN U-TACK

MULTI-PURPOSE SKIRTING TAPE

UZIN U-Tack is a double-sided, multi-purpose adhesive tape that allows for the easy, quick, and clean installation of skirting and floor covering strips. UZIN U-Tack is solvent-free and does not become brittle, providing a durable bond.

Benefits:

- Quick, clean & safe installation of skirting, capping and coving
- Strong and secure bond
- Solvent-free

Pack Size:	**Dimensions:**	**Drying Time*:**
1 roll / pack	25 mm x 50 m	None, immediately ready
1 roll / pack	40 mm x 50 m	
1 roll / pack	50 mm x 50 m	
1 roll / pack	85 mm x 50 m	

* Approximate drying time at 20 °C / 68 °F and 65 % relative humidity





THE ART OF FLOOR SYSTEMS

Over 111 years, our family of brands has grown and now represents all the disciplines in the art of floor installation. As a family business, the world of flooring is our vocation.

Together all our brands provide the foundation for professional craftsmanship. Whether UZIN, WOLFF, PALLMANN, Arturo, codex or Pajarito, each brand with its particular character is a building block in our flooring expertise and part of the UZIN UTZ family.

We started as a small, regional adhesive manufacturer in Vienna that has developed over the years into a leading global manufacturer of products and systems for flooring technology as well as a pioneer and leader in the industry.

We are united by the passion and ambition to provide our partners with the resources to achieve perfect results for every task. In the future, we will concentrate our diverse expertise under a common banner: “The Art of Floor Systems”.

UZIN UTZ®

YOUR FLOOR. OUR PASSION.



Installation systems for screeds, flooring and wood flooring.



Machinery and special tools for subfloor preparation and installation of floor coverings.




Complete product range for the installation, renovation and maintenance of wood flooring.



Resin and cementitious floor finishes combining performance and design.



Installation systems for tiles and natural stone.



High-quality painting, plastering and drywalling tools.

STRONG BRANDS FOR A STRONG TRADE.

THE FLOOR BELONGS TO YOU.

Uzin Utz UK Ltd.
Unit 2, Mitchell Court
Central Park, Rugby
Warwickshire, CV23 0UY
United Kingdom

T +44 1788 530080
F +44 1788 536508
uzin.uk@uzin-utz.com
www.uzin.co.uk

05.2026/ms

UZIN UTZ®