



Schlüter[®]-**BEKOTEC**

Thin screed assemblies without joints





Advantages at a glance

- ✓ Low assembly height
- ✓ Material and weight savings
- ✓ Guaranteed crack-free covering
- ✓ Full warranty by Schlüter-Systems
- ✓ No joints required in screed
- ✓ Non-buckling construction
- ✓ Quicker installation pace
- ✓ Short construction time thanks to quick curing
- ✓ Cost-effective CT/CA-C25-F4 usable without reinforcement
- ✓ High load-bearing capacity up to 5kN/m²
- ✓ Suitable for all floor coverings

The BEKOTEC system

Schlüter®-BEKOTEC is a safe assembly system for crack-free, non-buckling and functionally safe screeds with coverings made of ceramic tiles, natural stone, and other materials. The system is based on the patented studded polystyrene screed panel Schlüter®-BEKOTEC-EN, which is directly installed on top of load-bearing substrates or conventional insulation panels. Thanks to its low assembly height, BEKOTEC not only requires less space, but also results in significant material and weight savings compared to conventional screed systems, since the screed only has to cover the studs by 8 mm.

As part of the heated ceramic thermal comfort floor Schlüter®-BEKOTEC-THERM, the system forms a thin, energy-efficient, and highly responsive floor heating system that is ideally suited for new construction and renovation projects alike.

Warranty

On the safe side: Schlüter-Systems offers a five-year warranty for the cover assembly's suitability for use and absence of damage, provided all installation instructions were observed and the covering is used as intended.

Schlüter-Systems
PROFILE OF INNOVATION

Warranty agreement for the Schlüter®-BEKOTEC covering assembly

Construction project: _____ Projektnummer: _____
 Street: _____ City, Post Code: _____
 Floor level: _____
 Total area: _____
 Covering material: EN 250 P EN 1500 PF EN 23 F EN 12 FK EN 18 FTS 5
 Studded screed panels: Heated (with Schlüter®-BEKOTEC-THERM heating components)
 Construction type: Unheated


Type of use:
 Residential with load up to 1.5 kN/m²
 Commercial area with loads up to 2.0 kN/m²
 Special agreement for loads up to ____ kN/m²

Owner / contractor / order given by: _____

Date of completion: _____
For parties having the building's health care to be entered in the deed at the time.

Warrenter: _____
 Date, signature _____ Date, signature _____

Schlüter-Systems KG
 Schmölestraße 7
 58849 Iserlohn
 Company stamp _____

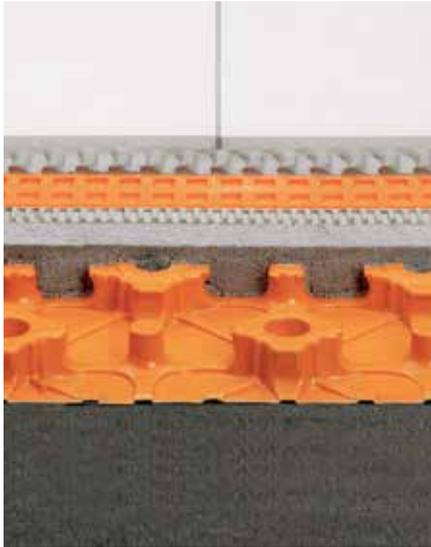


Low assembly height

Compared to conventional screeds, the Schlüter®-BEKOTEC system saves up to 37 mm in construction height, making it an ideal solution for renovation projects. The assembly height depends on the installed studded panel. When using BEKOTEC-EN 12 FK, the assembly height can be as low as 20 mm plus uncoupling membrane and covering. BEKOTEC is also available with an integrated insulation layer.

Material and weight savings


The estimated screed volume of a conventional screed floor is 61 liters or 122 kg/m². The Schlüter®-BEKOTEC system reduces this volume to quantities between 56 and 40 kg/m², depending on the selected type of studded panel. Accordingly, BEKOTEC can save up to 40 litres or 80 kilograms per square meter—an advantage that is also clearly reflected in the design calculation.

The right choice for every application area

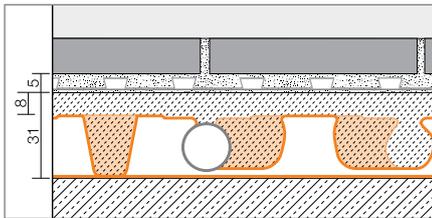


Schlüter®-BEKOTEC-EN 23 F

The perfect solution for renovation projects thanks to low assembly height. 31 mm

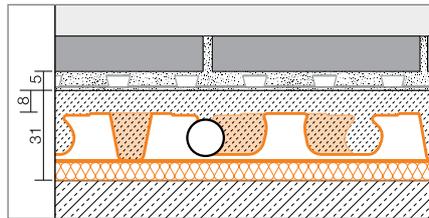


Schlüter®-BEKOTEC-EN 18 FTS

With integrated sound insulation to reduce impact sound by up to 25dB. 31 mm

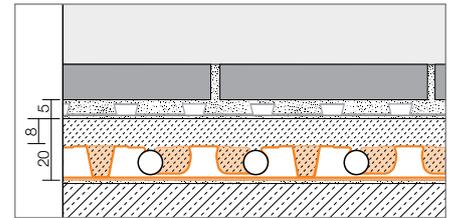


Schlüter®-BEKOTEC-EN 12 FK

Extremely thin variation for scenarios with minimal height availability. 20 mm

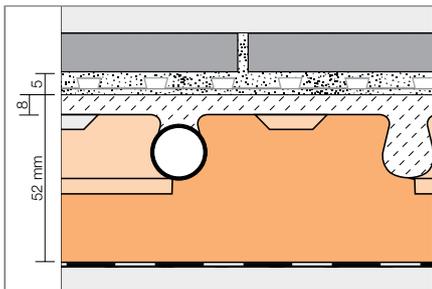

Schlüter®-BEKOTEC-EN

With integrated thermal insulation, ideally suited for floor heating systems. 52 mm

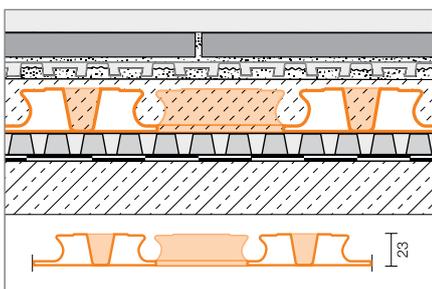

Schlüter®-BEKOTEC-DRAIN


Perfect solution for exterior areas. 31 mm



For further details and information, please see the step-by-step installation recommendations of the corresponding product data sheets.



No buckling, no cracks, no joints

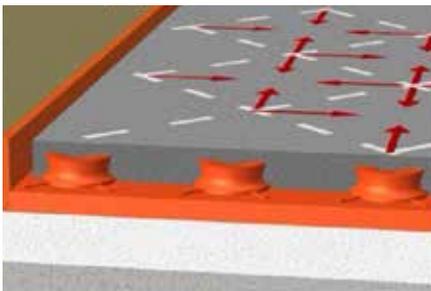

Contraction buckling may occur during the curing phase of screed and affect the entire area. In BEKOTEC covering assemblies, any contraction that occurs is absorbed by the studded pattern of the screed panel. Once cured, the screed is therefore free of inherent stresses, making it virtually impossible for buckling to occur in the area. BEKOTEC assemblies therefore don't show problems such as torn joints at the floor-wall transition and in skirtings.

Since tensions are evenly absorbed over the

entire area, no construction reinforcement or control joints are required in the screed. Properly installed BEKOTEC assemblies with the bonded uncoupling membrane Schlüter®-DITRA 25 also ensure that no cracks can form in the covering.

With the Schlüter®-BEKOTEC system, the design of movement joints can be matched to the selected joint pattern of the covering, since the screed can be built without joints and any intermediate or daywork joints can be covered with DITRA 25 and are not continued to the surface covering.

Of course, the general rules for the dimensions of covering segments still have to be followed.

Short construction time

Thanks to its easy installation and material savings, screeds made with Schlüter®-BEKOTEC can be installed much quicker. What's more, the bonded uncoupling membrane Schlüter®-DITRA 25 ensures that the screed can be covered with ceramic tiles, natural or artificial stone as soon as the screed is able to bear weight.

This eliminates long waiting times for screed curing and CM measurements and cuts up to four weeks out of construction time—a huge advantage for new construction and renovation projects alike. The residual moisture level for calcium sulfate and anhydrite screeds must be below 2 CM%.



Screed properties

Screeds used with Schlüter®-BEKOTEC do not require expensive specialty materials. You can use conventional CT/CAC25 F4 screeds without reinforcement that can be mixed with a screed pump or a drum mixer. Poured screeds are as suitable as moist screeds.

Quicker installation pace

The installation pace for conventional screed is about 70 m² per day. With Schlüter®-BEKOTEC, this can be increased to approx. 100 m² per day.

Time-consuming auxiliary work such as creating movement joints in the screed, installing reinforcement mesh, or adding costly additives is not necessary. In addition, the required screed volume is significantly lower.






Up to 25 dB impact sound insulation

Highly durable

Floor assemblies with Schlüter®-BEKOTEC are highly durable and long-lived the system can easily withstand loads up to 5 kN/m² in residential and commercial structures.

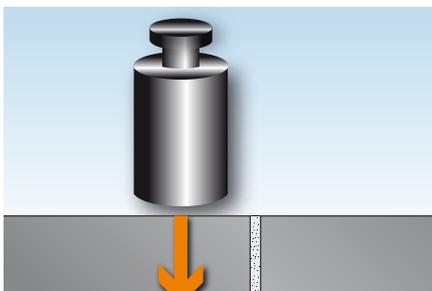

Free design choices

Because of the safe Schlüter®-BEKOTEC assembly, there are no restrictions regarding the size of tiles and pavers. Even large-scale elements can be installed without problems and remain permanently free of damage.

Impact sound

Schlüter®-BEKOTEC-EN 18 FTS is a special solution. It includes an integrated 5 mm sound insulation layer, which reduces impact sound emissions by up to 25 dB, although the assembly height is just a con-

venient 31 mm.

This creates a valuable added benefit for restorations and renovation projects that also pleases the neighbors.


Suitable for all covering materials

In addition to ceramic tiles or natural stone, Schlüter®-BEKOTEC is of course also suited for all other surface coverings and can be used as a universal system in combination with parquet, laminate, linoleum, PVC, or carpeting. If these materials are used, they are directly installed on the screed without DITRA 25. In that case, the height of the screed has to be adjusted to the corresponding covering materials and the applicable material-specific residual moisture level of the screed must be observed.






Screed assemblies in exterior areas: Schlüter®-BEKOTEC-DRAIN

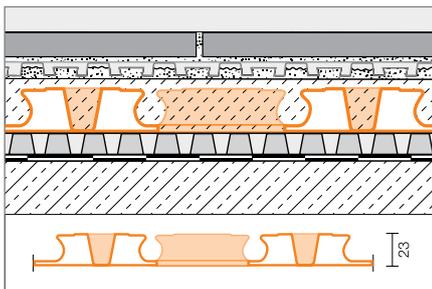

Schlüter®-BEKOTEC-DRAIN

Schlüter®-BEKOTEC-DRAIN is an ideal solution for reliably functional thin screeds in exterior areas with ceramic tile and natural stone coverings and is very well suited for use of pervious mortar and drainage screeds. The system is based on the studded screed panel Schlüter®-BEKOTEC-EN 23 FD, which features regular perforations and communicating drainage channels. Again, a minimum screed thickness of just 31 mm can be achieved, provided the studs are covered by at least 8 mm. The bonded drainage and uncoupling membrane Schlüter®-DITRA-DRAIN can be installed as soon as the screed is ready to bear weight, immediately followed by the installation of ceramic tiles or natural stone.

With BEKOTEC-DRAIN, you are free to choose the dimension of tiles used in exterior areas, for example to continue modern, large-scale tiles uniformly from the living room onto the balcony or terrace. Again, no joints need to be included in the screed, allowing for the perfect adjustment of the movement joints in the covering layer, which have to be created in the mandated spacing with Schlüter®-DILEX, to the selected joint pattern.

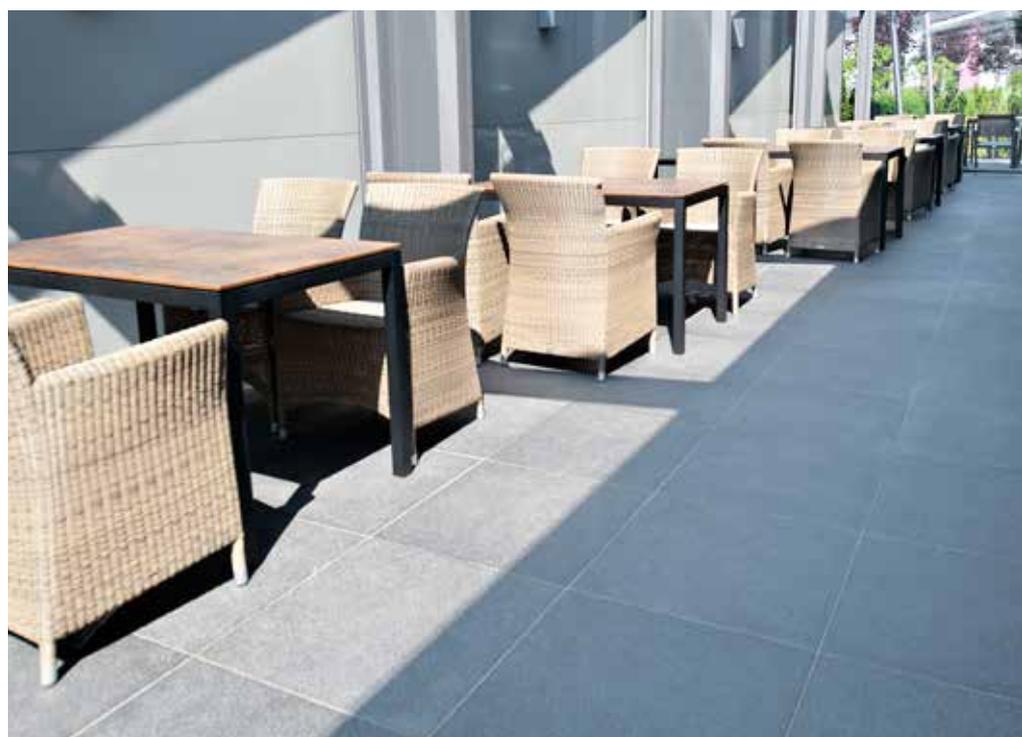



Schlüter®-BEKOTEC-THERM

The innovative ceramic thermal comfort floor

The Schlüter®-BEKOTEC system is a quickly installed, thin-layered, non-buckling and tension-free screed assembly. The heating and cooling components of Schlüter®-BEKOTEC-THERM can be used for building low-energy ceramic thermal comfort floors.



Schlüter®-BEKOTEC-THERM: The innovative ceramic thermal comfort floor

The intelligent heating, cooling, and control technology of Schlüter®-BEKOTEC-THERM turns a thin floor construction into an energy-efficient, highly responsive floor heating system. Due to the low height and mass of the screed, the desired temperature quickly reaches the surface, which allows for opera-

ting the floor heating system at low temperatures. That makes the system ideally suited for use with renewable energy sources. Furthermore, the bonded uncoupling with Schlüter®-DITRA 25 ensures even heat distribution and also eliminates time-consuming cure heating so that the heated space

is ready for use after approx. seven days—up to four weeks faster than with conventional floor heating systems.



Bathroom renovations with BEKOTEC?

No problem – **Schlüter®-BEKOTEC-THERM** can also be connected to existing heating systems.

Heating technology advantages

- ✓ Even heat distribution
- ✓ Comfort
- ✓ Hygienic and healthy
- ✓ Easy control options

Ecological benefits

- ✓ Low supply temperature, low heating cost
- ✓ Effective use of renewable energy sources
- ✓ Highly responsive heated floor assembly
- ✓ Low energy consumption



Saving energy with
ceramic tiles

... made by Schlüter-Systems
www.bekotec-therm.co.uk

i

Information

For those who want to know more!

Would you like to learn more about the bonded covering assemblies of Schlüter-Systems?



For a quick overview of our products, visit us online at www.schluter.co.uk and www.bekotec-therm.co.uk, where you can find additional information with the click of your mouse.



Our illustrated price lists and current technical information leaflets contain many more details on our intelligent system products.

Your retail specialist:



PROFILE OF INNOVATION

Schlüter-Systems KG · Schmölestraße 7 · D-58640 Iserlohn · Tel.: +49 2371 971-261 · Fax: +49 2371 971-112
info@schlueter.de · www.schluter-systems.com

Schlüter-Systems Ltd · Units 4-5 Bardon 22 · Beveridge Lane · Coalville · Leicestershire · LE67 1TE
Tel.: +44 1530 813396 · Fax: +44 1530 813376 · technical@schluter.co.uk · sales@schluter.co.uk · www.bekotec-therm.co.uk