



Lindab
ISOL


Pre-insulated ducting with many benefits

- Hot dip galvanised steel ducting with intermediate mineral wool insulation between inner and outer steel sheets
- Eliminates the need for any additional site fitted insulation, sealants or finishes
- Incorporates Safe seal push-fit joints Eurovent certified to airtightness Class D
- Cut to design lengths at the factory and ordered to exact site requirements.



Suited to many applications

- A consistent, high quality finish particularly appealing for exposed installations
- Especially suitable when low temperature fresh air is supplied to the space and risk of condensation is present
- Reduced breakout noise from ventilation system
- Self-finished or can be painted

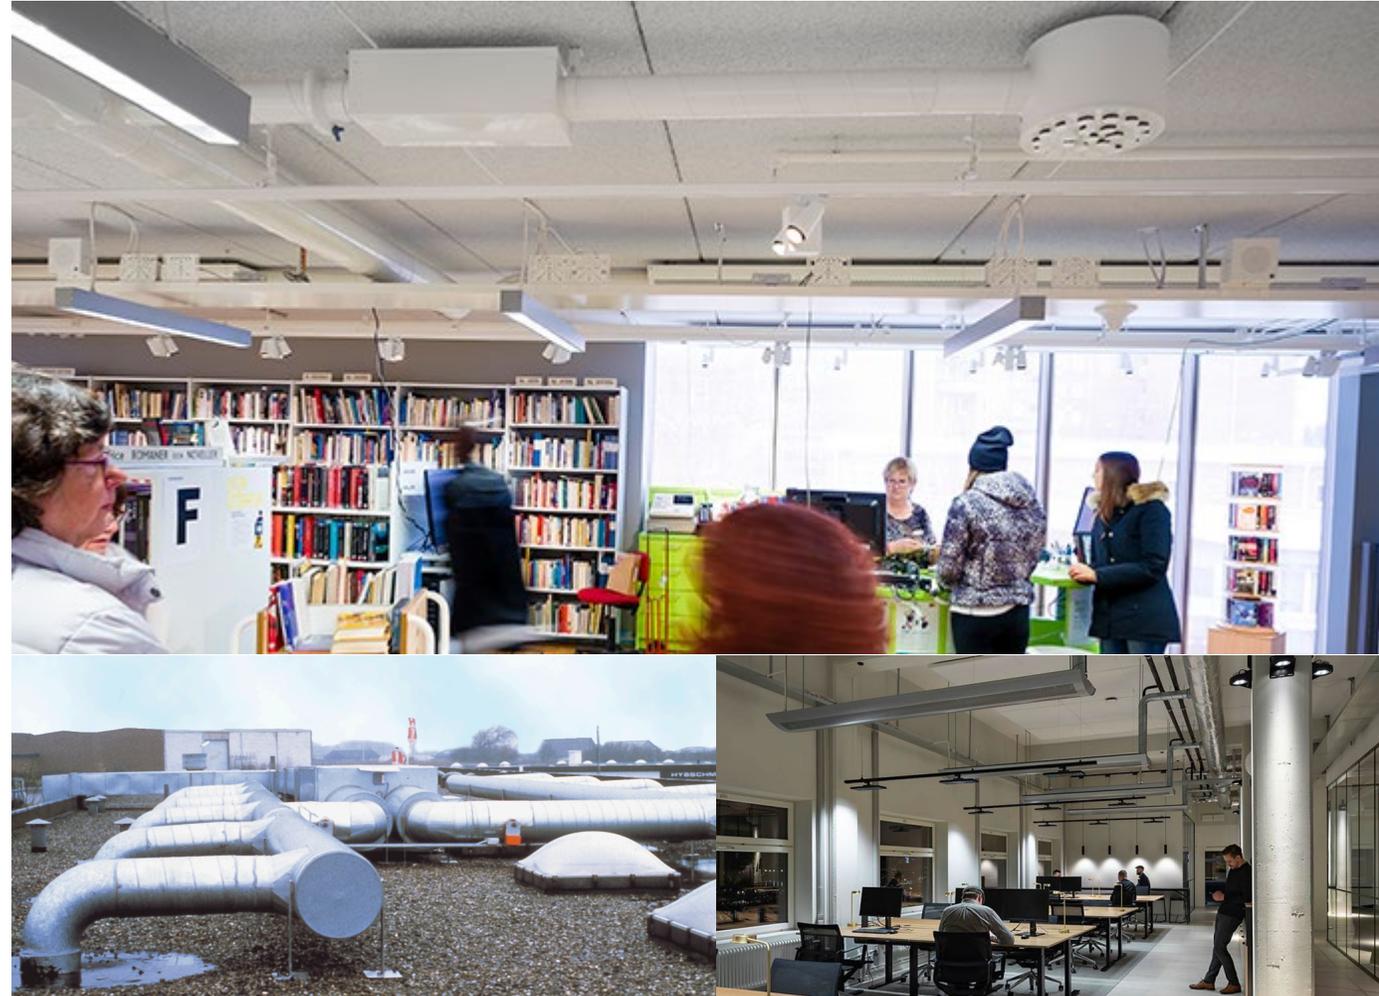

Full range of fittings



SRI
circular duct



BUI 90°
bend



BUI 45°
bend



BUI 30°
bend



BFUI 90°
bend



BFUI 45°
bend



BFUI 30°
bend



RCLUI
long reducer



RCFLUI
reducer



TCPUI
T piece



TCUI
T piece



TRUI
cleaning T piece



NPUI
coupling



MFI female
coupling



ESUI
end cap



EPFUI
access door



ESHUI
access door



EPFHUI
access door



SVK
sealing clamp



MFK
sealing clamp



ILUI
take off

Brunel Building

Modus Space

Alpha FX

London

[Project Video](#)



Berwick Works

Alexander Martin Architects
London

[Project Walkthrough](#)



ISOL support

Documentation

- [Technical Guide](#)
- [Installation Guide](#)
- [Building product declaration](#)

Software

- [LindQST](#)





Tel: 01604 788383
Email: ics@lindab.co.uk