

ROLLERCASH

DIMENSIONS (mm)

H: 550 W: 320 D: 375 plus 115 for the drum

PLINTH DIMENSIONS (mm)

H: Range 60 - 200 plus bespoke
W: 340 D: 390

WEIGHT (kg)

Excluding Plinth 85Kg

RESISTANCE

BS EN1143-1 Class 1

CONSTRUCTION

Door leaf and frame are fabricated from timber and composite materials to match the required bullet and/or manual attack resistance levels.

The door leaf is hung on heavy duty hinges that include dog bolts and fitted with a T section to protect the leading edge of the door.

ROLLERCASH

RollerCash is a combined cash handling system and cash recycling device that allows instant deposits and time controlled withdrawals of cash at the cashier position. Cashiers can increase or decrease their till drawer cash without leaving their workstation minimising transportation of bulk cash between tills. Typical applications are banks, building societies, foreign exchange, cash in/cash out businesses.

MAIN FEATURES

- Highly cost effective and reliable
- No maintenance required
- Activated by coded electronic key and controlled by numeric keypad for deposits and withdrawals
- Large 20 segment rotating drum with a 200 note per segment capacity
- Instant deposit of bank notes
- Time controlled withdrawals of cash
- All models have a total withdrawal function without time delay when the branch is closed and the perimeter is secured
- The drum is controlled to expose only one segment at a time. Between segment openings, and also in the off state, a shutter closes the segment aperture

OPTIONAL

- Nationwide Installation, service & support
- Standard plinth heights are 60mm, 120mm and 200mm but bespoke heights are available




SERVICE &
MAINTENANCE
AVAILABLE

+44 (0) 1322 223 233

sales@safetell.co.uk safetell.co.uk

TECHNICAL DRAWINGS

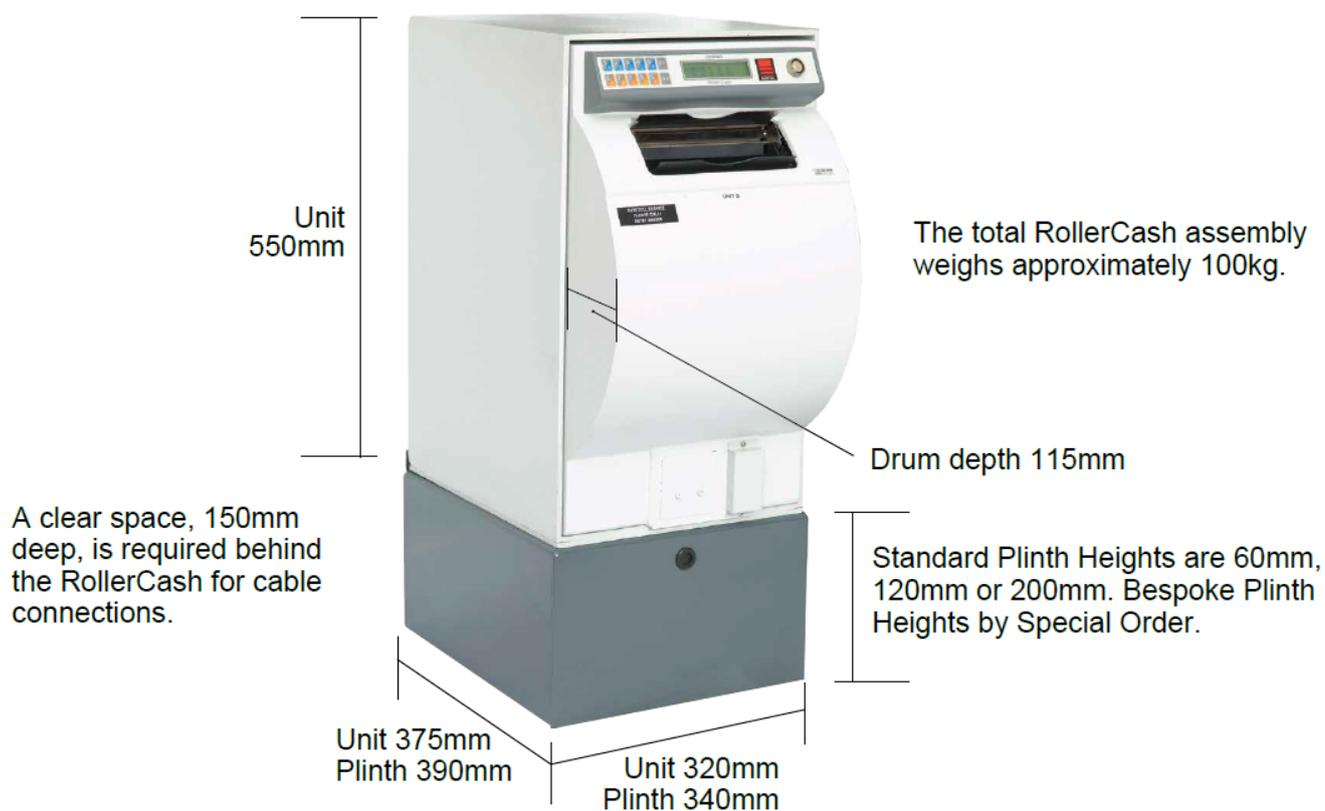

WE ARE FULLY ACCREDITED



+44 (0) 1322 223 233

sales@safetell.co.uk safetell.co.uk



Safetell
SECURITY | MAINTENANCE