Safetell
SECURITY | MAINTENANCE

DATASHEET

MERIDIAN MODULE

Safetell's Meridian Module combines two of our proven products, the Stalwart Steel Door and the Bulk Transfer Unit, providing secure transfer of cash to external locations. The combination offers significant manual attack resistance. The security vision panel allows staff to see who is on the other side of the transfer unit with the Stalwart Door offering increased vandal and weather resistance.

DIMENSIONS (mm)
H: 300 W: 410 D: 585

INTERNAL DIMENSIONS:
410w x 300h x 585d

WEIGHT(kg)
176

WALL REQUIREMENTS
Prepared structural opening of 800mm x 1000mm with cavities closed and finished.

Ballistic protection to FB4 of BSEN 1522: 1999 and BSEN 1522: 1999 is maintained throughout the module, even with the external door open and only one Meridian door closed.

CONSTRUCTION
The outer frame and external door are supplied factory primed ready for finishing on site, whilst the Meridian 70 is powder coated light grey. The surrounding framework for the security laminated glass vision panel and the external audio cover are both finished in satin polished stainless steel.

The outer frame is secured into a prepared opening and then the Meridian unit is secured into the frame. Two electrical power points need to be located near the module to provide power to the Meridian 70 and the electrical door release/intercom.

The external door can be either opened by an authorised key held by the courier or by the courier alerting the staff by the call button/microphone. Once the door is open a member of staff controls the access of the electronically controlled Meridian doors - only one door can be opened at a time. Each door opens 90 degrees to rest, closing is assisted by gas springs to ensure positive latching.

PART NUMBER
011721

MAIN FEATURES

- The external door can either be opened by an authorised key holder or by the courier alerting staff by the call button/microphone
- Integrated electronic intercom
- Transfer capacity 70ltrs
- With the external door open, the internal staff control the access of the electronically controlled Bulk Transfer Unit
- Only one door of the BTU can be opened at any one time. Closing is assisted by gas springs to ensure positive latching
- Outer frame is secured into a prepared opening
- Electrical points are required for the BTU and electrical door release and intercom
- Stalwart door locked by a Chubb 3R35 mortice locking latch with electrical door release fitted into the stile

OPTIONAL

- Nationwide installation if required
- If the installation position does not have sufficient wall width to support the unit, Safetell can provide an enhancement with CityWall



STAFF VIEW




CUSTOMER VIEW

SERVICE & MAINTENANCE AVAILABLE

+44 (0) 1322 223 233

sales@safetell.co.uk safetell.co.uk

TECHNICAL DRAWINGS

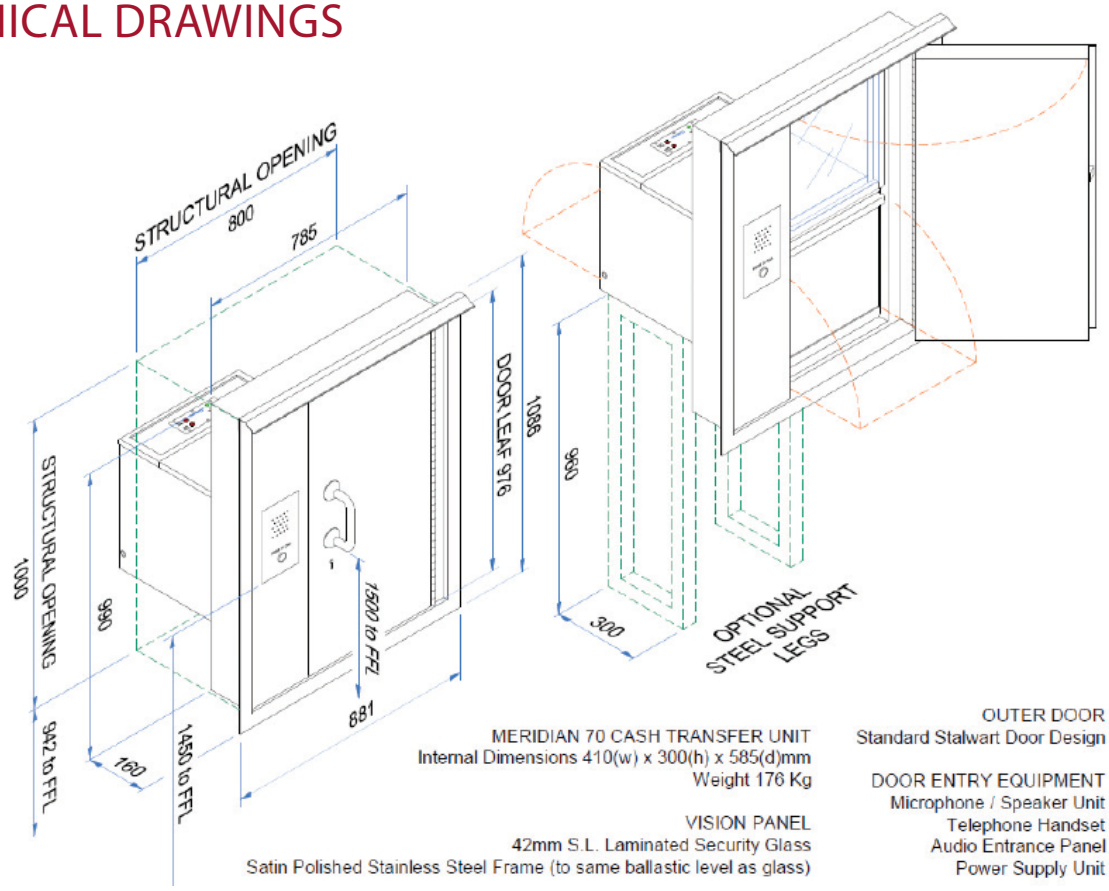

MERIDIAN 70 CASH TRANSFER UNIT
Internal Dimensions 410(w) x 300(h) x 585(d)mm
Weight 176 Kg

VISION PANEL
42mm S.L. Laminated Security Glass
Satin Polished Stainless Steel Frame (to same ballastic level as glass)

OUTER DOOR
Standard Stalwart Door Design

DOOR ENTRY EQUIPMENT
Microphone / Speaker Unit
Telephone Handset
Audio Entrance Panel
Power Supply Unit

WALL REQUIREMENTS
Prepared structural opening of 800mm x 1000mm with cavities closed and finished.



WE ARE FULLY ACCREDITED

SafeContractor APPROVED
BUILDER'S PROFILE
Constructionline Gold Member
LRQA CERTIFIED ISO 9001 · ISO 14001 UKAS MANAGEMENT SYSTEMS 0001
ADSA Automatic Door Suppliers Association

+44 (0) 1322 223 233

Safetell SECURITY | MAINTENANCE