

Faster fastenings

Powder coated AP rivets delivered in 3 days*

Premium quality Outstanding service

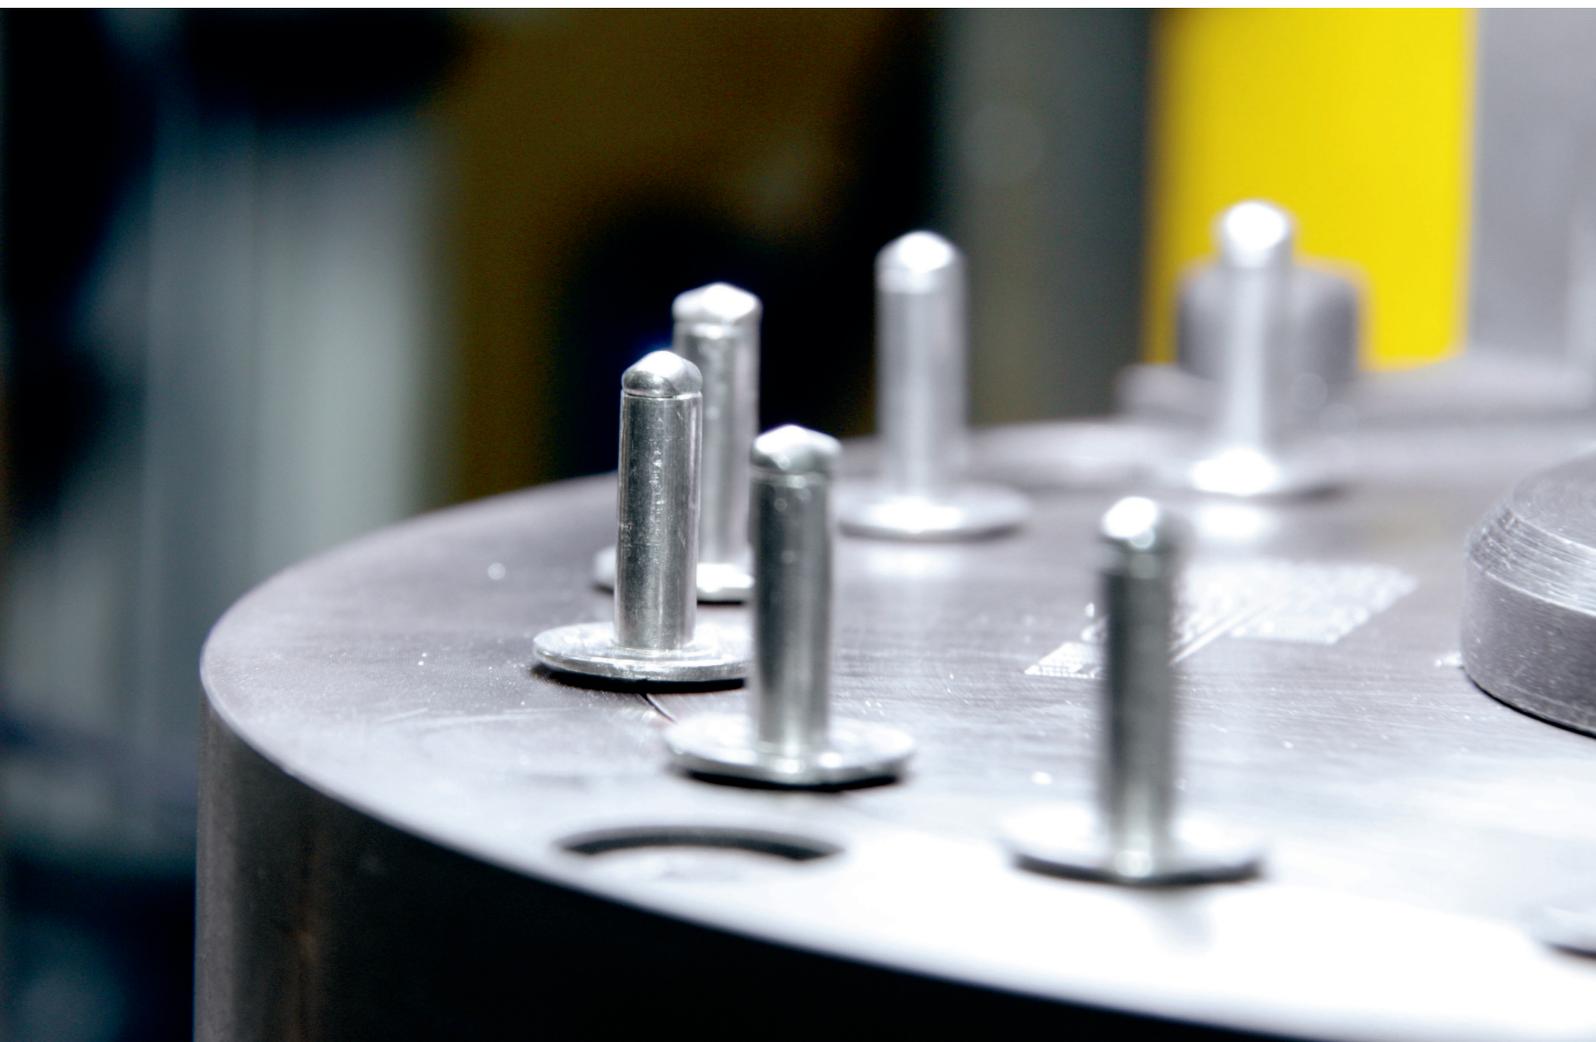
The SFS AP rivets are ideal for securing high performance cladding panels to steel or aluminium support systems. Their superior quality and performance makes them an ideal choice, colour matched to leading OEM's panels and despatched within three days from ordering.

*Our Service Offering



We powder coat our AP rivets to your specific colour requirements at our Leeds production facility.

Orders will be despatched within **three days** when the order is placed before 12 noon for all 100+ **standard colours** outlined overleaf.

More colours are available though longer lead times and additional costs may apply. Please contact your local sales representative or our customer services team for a quotation.




Range / Properties

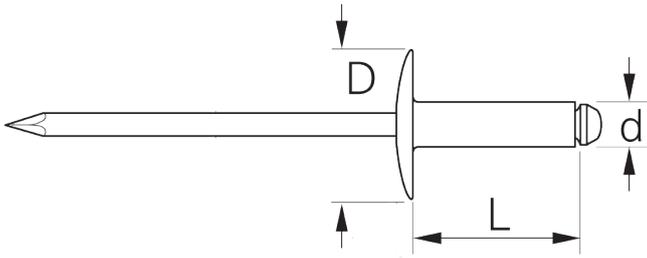

Code	Dia (d) mm	Length (L) mm	Flange (D) mm	KL / Grip Range mm	Drill Hole Dia mm	Units of Sales
AP16-50160-S	5.0	16	16	8.0 - 12.0	5.1	100
AP16-50180-S	5.0	18	16	9.5 - 13.5	5.1	100
AP16-50210-S	5.0	21	16	12.5 - 16.5	5.1	100
AP14-50120-S	5.0	12	14	4.0 - 8.0	5.1	100
AP14-50160-S	5.0	16	14	8.0 - 12.0	5.1	100
AP14-50180-S	5.0	18	14	9.5 - 13.5	5.1	100
AP14-50210-S	5.0	21	14	12.0 - 16.0	5.1	100
AP14-50230-S	5.0	23	14	14.0 - 18.0	5.1	100
AP11-50120-S	5.0	12	11	4.0 - 8.0	5.1	100
AP11-50180-S	5.0	18	11	9.5 - 13.5	5.1	100


Rivet Body

Aluminium AlMg5




Mandrel

A2 Stainless Steel (304)



Tensile Strength

2250N (AP11 - 2384N)



Shear Strength





3950N (AP11 - 3785N)

















Standard Colours

Orders will be despatched within three days when the order is placed before 12 noon for all standard colours outlined below.

Other colours will be despatched as soon as possible with dates and any additional costs confirmed during the order process.

RAL1001	
RAL1003	
RAL1013	
RAL1015	
RAL1019	
RAL1021	
RAL1033	
RAL1035 (Pearl)	
RAL2000	
RAL2002	
RAL2004	
RAL2009	
RAL2010	
RAL3000	
RAL3004	
RAL3007	
RAL3009	
RAL3011	
RAL4005	
RAL5002	
RAL5003	
RAL5007	
RAL5008	
RAL5009	
RAL5010	
RAL5011	

RAL5014	
RAL6002	
RAL6003	
RAL6005	
RAL6007	
RAL6009	
RAL6024	
RAL6025	
RAL6026	
RAL6027	
RAL7000	
RAL7001	
RAL7002	
RAL7004	
RAL7005	
RAL7006	
RAL7011	
RAL7012	
RAL7013	
RAL7015	
RAL7016	
RAL7021	
RAL7021-MATT	
RAL7022	
RAL7022-MATT	
RAL7024	

RAL7030	
RAL7030-MATT	
RAL7031	
RAL7032	
RAL7035	
RAL7036	
RAL7037	
RAL7038	
RAL7039	
RAL7040	
RAL7042	
RAL7043	
RAL7043-MATT	
RAL7045	
RAL7046	
RAL7047	
RAL7048 (Pearl)	
RAL8004	
RAL8012	
RAL8014	
RAL8019	
RAL8023	
RAL8028	
RAL8080-MATT	
RAL9001	
RAL9002	












High Performance Powder Coating

It is essential that fasteners deliver a level of aesthetics and durability that match the building envelope.

The high quality powder coating used on SFS fasteners was developed to keep up with architect's increasingly innovative designs and to provide increased benefit over the outdated moulded head products that are subject to UV degradation.

The powder coating process results in a robust finish that is excellent for weathering and colour stability in exposed external applications.

SFS powder coated fasteners can also qualify for our unrivalled 12 year colour stability guarantee without the need for regular cleaning.

RAL9003	white	NCS-3060-B (BS18E53)	
RAL9004		NCS-5020-B10G (BS18C37)	
RAL9005		NCS-6005-B20G (BS18B25)	
RAL9006		NCS-8005-Y50R (BS08B29)	
RAL9007		NCS-S-2005-B80G (BS18B17 MATT)	
RAL9007-MATT		NCS-S-3000-N (BS00A05)	
RAL9010		NCS-S-3010-Y (BS10B19)	
RAL9011		NCS-S-4020-G10Y (BS14C37)	
RAL9016		NCS-S-4020-G70Y (BS12B21)	
RAL9018		NCS-S-4550-R80B (IKEA BLUE)	
RAL9022 (Pearl)		NCS-S-6020-B10G	
RAL9023 (Pearl)		NCS-S-8010-G50Y (BS12B29)	
BS14C39			
BS18C39			
BS20E51			
NCS-2502-Y (BS10A05)			

Tools and Accessories

Centralising drilling gauge

Ensures accurate drilling of substructure.

Available in 4 nose dimensions



Rivet spacer nosepiece

Ensures rivet installed off the panel to allow sliding point.

Suitable for Accubird & Powerbird



Alternative centralising nosepiece

Alternative nosepieces for centralising drilling gauge. 4 sizes available



Drill bit

5.1mm diameter x 110mm



Fixed point sleeves

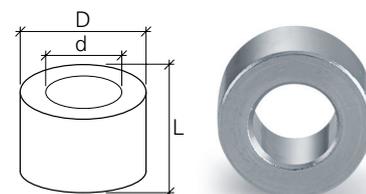
Ensures rivet is installed at a fixed point by filling the hole in the panel.

Material: Aluminium



FP-A-7,9x6

FP-A-8,4x6

FP-A-9,4x6



The centralising drilling guage can be used with all cordless screwdrivers available on the market





Technical advice and sales

SFS Group Fastening Technology Ltd
153 Kirkstall Road,
Leeds, LS4 2AT
T +44 113 2085 500
uk.leeds@sfsintec.biz
www.sfsintec.co.uk