


Center Point System

The Center Point System simplifies installation compared to conventional rivets.

The new Center Point System
Provides concentric installation of the fastener

The new Center Point System, simplifies the installation of rainscreen facades. The pre-fitted centring sleeve, drill tip and special thread geometry ensures effective positioning of the fastener to the façade panel. Thanks to the patented thread, the fastener is protected from potential overdriving issues resulting in a secure installation.

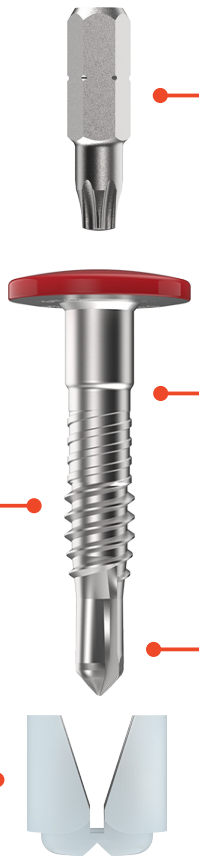

Optimised bit
- Bit engages effectively with the fastener
- Optimal guidance during installation
- Allows for a controlled installation

Screw head
- Paintable in a large range of colours
- Coning shape under the fastener head prevents scratches on the panel surface

Reduced thread
- Allows for deliberate overdriving

Double-start thread
- Ensures alignment of the fastener to the panel
- Prevents the fastener from unscrewing due to expansion and contraction

Drill tip
- Bites immediately and drills through the substructure efficiently
- Also available as a bimet version for steel substructures


Centring sleeve
- Centres the fastener perfectly in the panel hole
- Leaves no residual material in the drill hole
- The centering sleeve contains biopolymers recognised for natural decomposition

Patented complete system
Twice as fast as a conventional rivet solution


Reduced installation steps
Compared to conventional rivet solutions, the Center Point System has streamlined and simplified the installation process. Fastening is done swiftly, in one step and without a special tool. You save time and avoid the nuisance of poorly set fasteners.

For aesthetical, long-lasting façades
Façade panels expand and contract due to temperature fluctuations. This can often lead to unsightly damage at the fastening points, which can be expensive to put right. The Center Point System prevents this damage in two ways: First no material from the centring sleeve remains in the drill hole, which allows full expansion and contraction. Second the conical shape of the head prevents it from scratching the panels when they move.


Improved installation speed
With the new Center Point System, you work more than twice as fast as with a conventional façade rivet.

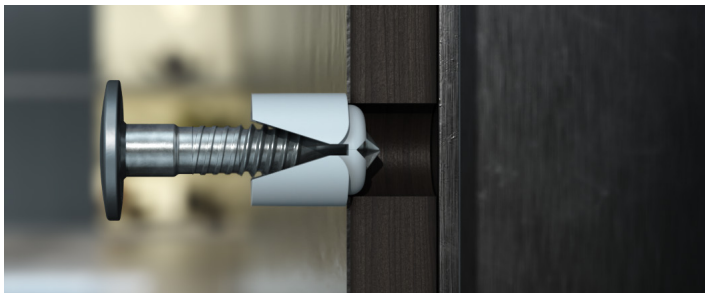


1. Position fastener with pre-fitted centring sleeve

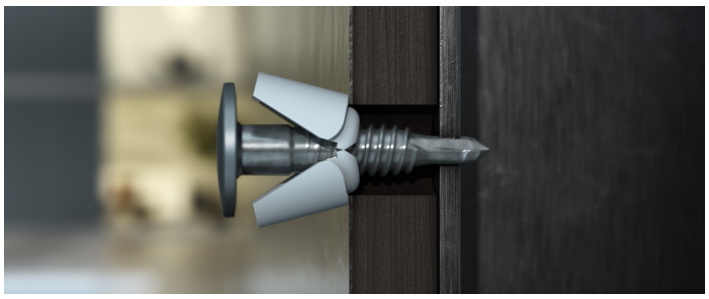

2. Set fastener → the centring sleeve springs apart

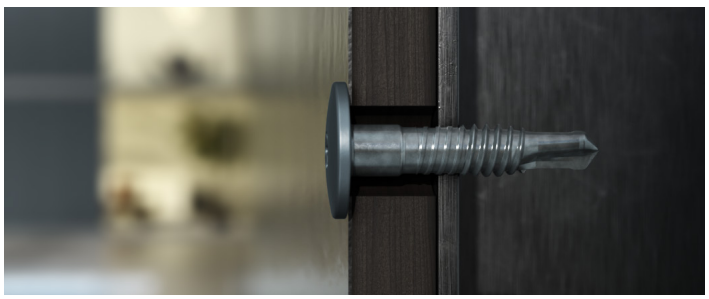

3. The centring sleeve leaves no residual material in the drill hole

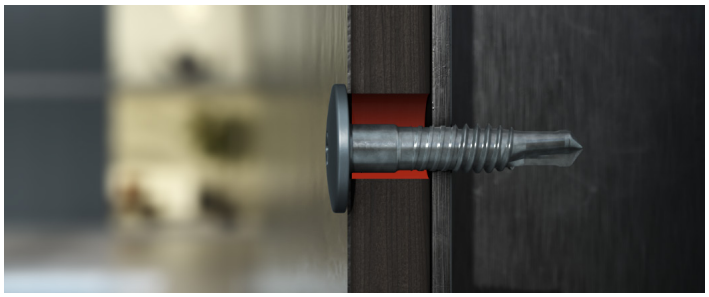

4. Correct alignment allows full expansion and contraction

www.sfs.com/cps-en →

Fastener

Description	Panel thickness (mm)	Pre-drilled panel hole Ø (mm)	Clamping length (mm)	Aluminium thickness (mm)	Steel thickness (mm)	Material No.	
SDA4-D15-CSB10/6-5,8×25-A4	6,0	10,0	7,8–9,0	1,8–3,0	–	2157359	
SDA4-D15-CSB10/8-5,8×29-A4	8,0		9,8–11,0			2157375	
SDA4-D15-CSB10/10-5,8×33-A4	10,0		11,8–13,0			2157377	
SDA4-D15-CSB10/13-5,8×38-A4	12,0–13,0		13,8–16,0			2157378	

The fasteners are supplied with a suitable bit.



Accessories

Description	Application	
FP-S-10.0×6-6.0	Fixed point sleeves in stainless steel A2	
GP-S-10.0×6-6.0	Sliding point sleeves in stainless steel A2	
GP-H-10,0-CPS	Impact tool for aligning and setting the sliding point sleeve	
VHM-10.0×80	For pre-drilling the façade panels Ø10.0 mm	
T25W-25-HEX-¼"	Bit	
Bit holder ZA¼"	Universal bit holder	

SFS Group Fastening Technology I 153 Kirkstall Road I Leeds LS4 2AT I ukenquiries@sfs.com I uk.sfs.com

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes. 10/2025 V2.

© SFS, 10/2025, BR_Center_Point_System_en_V2