

# ANTI-GRAFFITI PRODUCTS

**KEIM MX Glaze** - KEIM MX Glaze is an engineered siloxane coating with the properties of both a high performance epoxy and a polyurethane in one coat.

KEIM MX Glaze provides a general purpose high gloss, clear coating which has good weathering and wear resistance properties.


The finish provides a wipeable, durable surface that has excellent anti-graffiti properties and is suitable for all mineral substrates.

KEIM MX Glaze can be applied over KEIM Mineral Paints to provide anti-graffiti protection.

**KEIM APP-S** - KEIM APP-S is a sacrificial anti-graffiti system applied as a two coat system.

KEIM APP-S is a mix of natural polysaccharides and water and is designed to be easily removed and re-applied. Graffiti can be removed using a high pressure sprayer.

KEIM APP-S has a low sheen finish and does not significantly darken the surface to which it is applied. It is suitable for all mineral surfaces and for surfaces which have been treated with KEIM Mineral Paints.

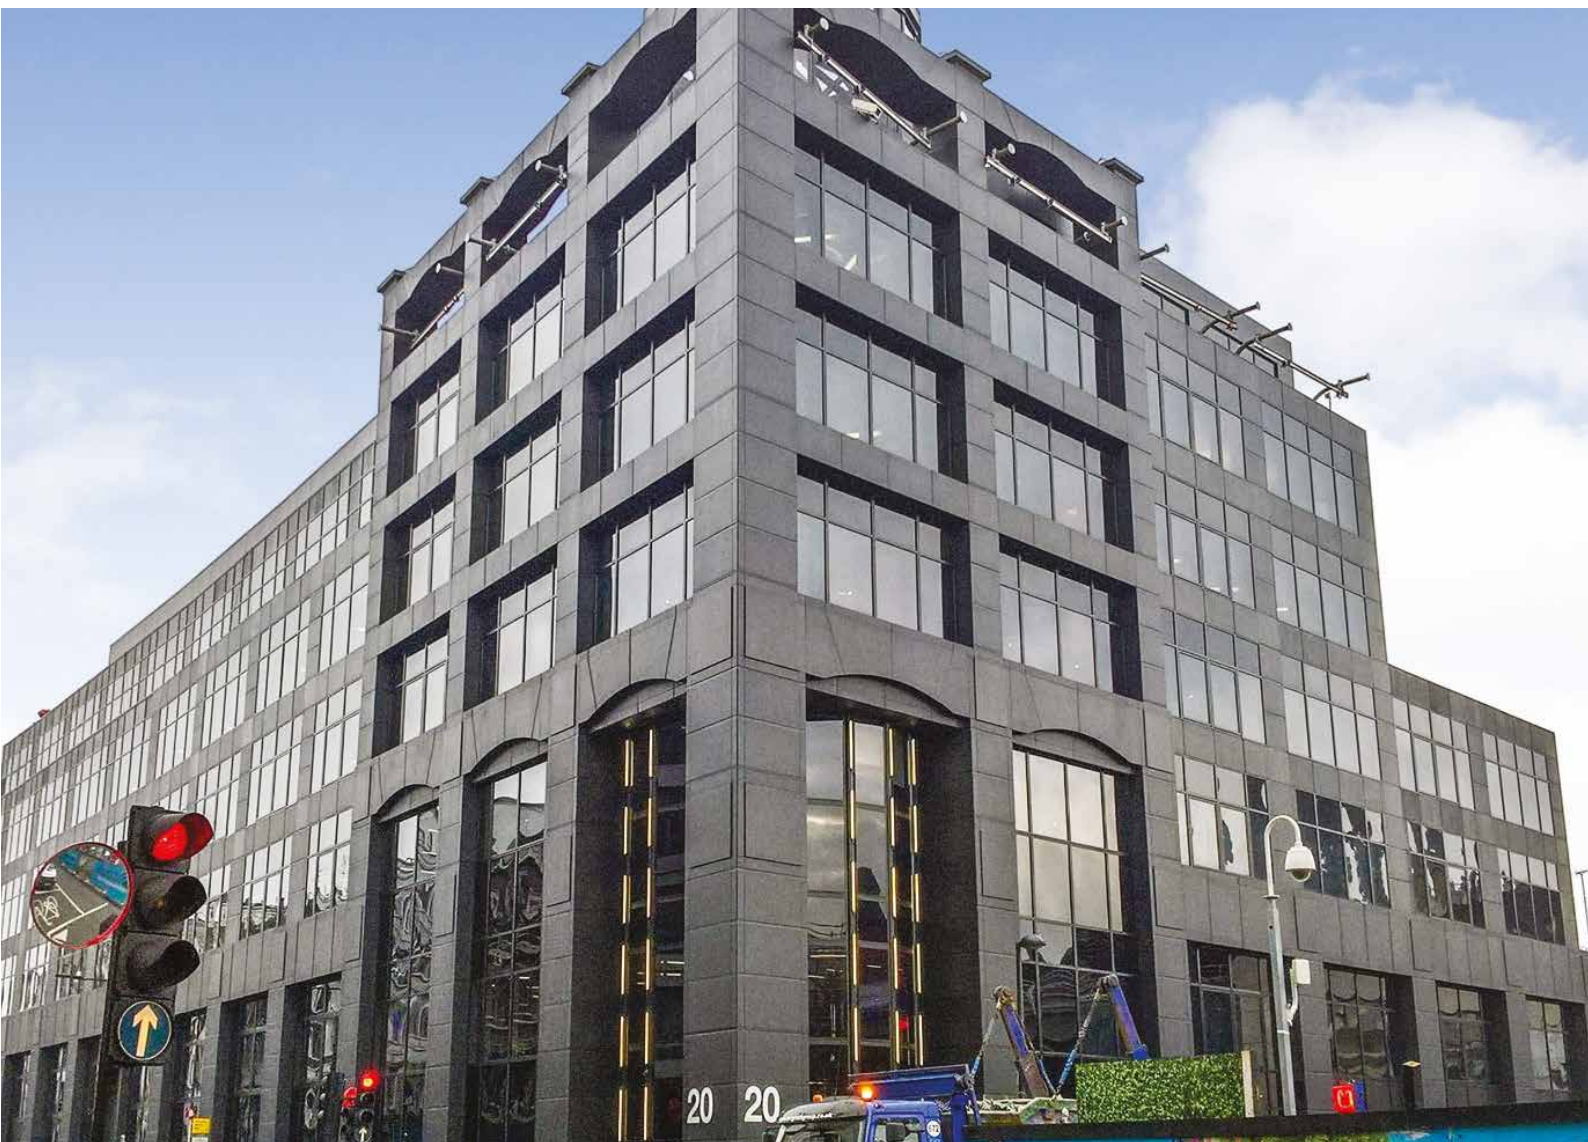

# ANTI-GRAFFITI TECHNICAL INFORMATION

Product	KEIM Glaze MX	KEIM APP-S
<b>1. Field of Application</b>	KEIM MX Glaze is an engineered siloxane coating with the properties of both a high performance epoxy and a polyurethane in one coat. General purpose high gloss coating offering good weathering and wear resistance. Provides a wipeable, durable surface that has good anti-graffiti properties for all mineral substrates.	KEIM APP-S is a two coat semi-permanent/sacrificial anti-graffiti system made from a mix of natural polysaccharides and water. KEIM APP-S is suitable for all mineral surfaces and for surfaces which have been treated with KEIM Mineral Paints.
<b>2. Product Properties</b>	<ul style="list-style-type: none"> <li>• Gloss appearance</li> <li>• Easy to remove graffiti</li> <li>• Clear</li> </ul>	<ul style="list-style-type: none"> <li>• Non-flammable</li> <li>• Easy to remove graffiti and recoat</li> <li>• High vapour permeability</li> <li>• Clear</li> </ul>
<b>3. Application Instructions (onto clean dry surfaces)</b>	KEIM MX Glaze is supplied in the correct mixing proportions of resin and cure. Add cure to resin and stir thoroughly with mechanical mixer for five minutes. Apply a thin and even coat by brush or short pile roller.	KEIM APP-S should be applied as a two coat system. Each coat applied in a horizontal manner, followed by a vertical manner by airless spray, brush or roller.
<b>Cleaning of tools</b>	Clean immediately after use with solvent.	Clean immediately after use with water.
<b>Consumption*</b>	Approx. 0.1lt/m <sup>2</sup> per coat	Approx. 0.2 – 0.61 lt/m <sup>2</sup> (for two coats)
<b>Packaging</b>	5 lt containers	5 lt containers

\*Please note all consumption rates given in the technical information section are offered for guideline purposes and are quoted for smooth surfaces. Actual rates are the responsibility of the applicator. Project specifications should be referred to for specific rates.