




Complete heating solutions 2023

Revised edition, September 2023

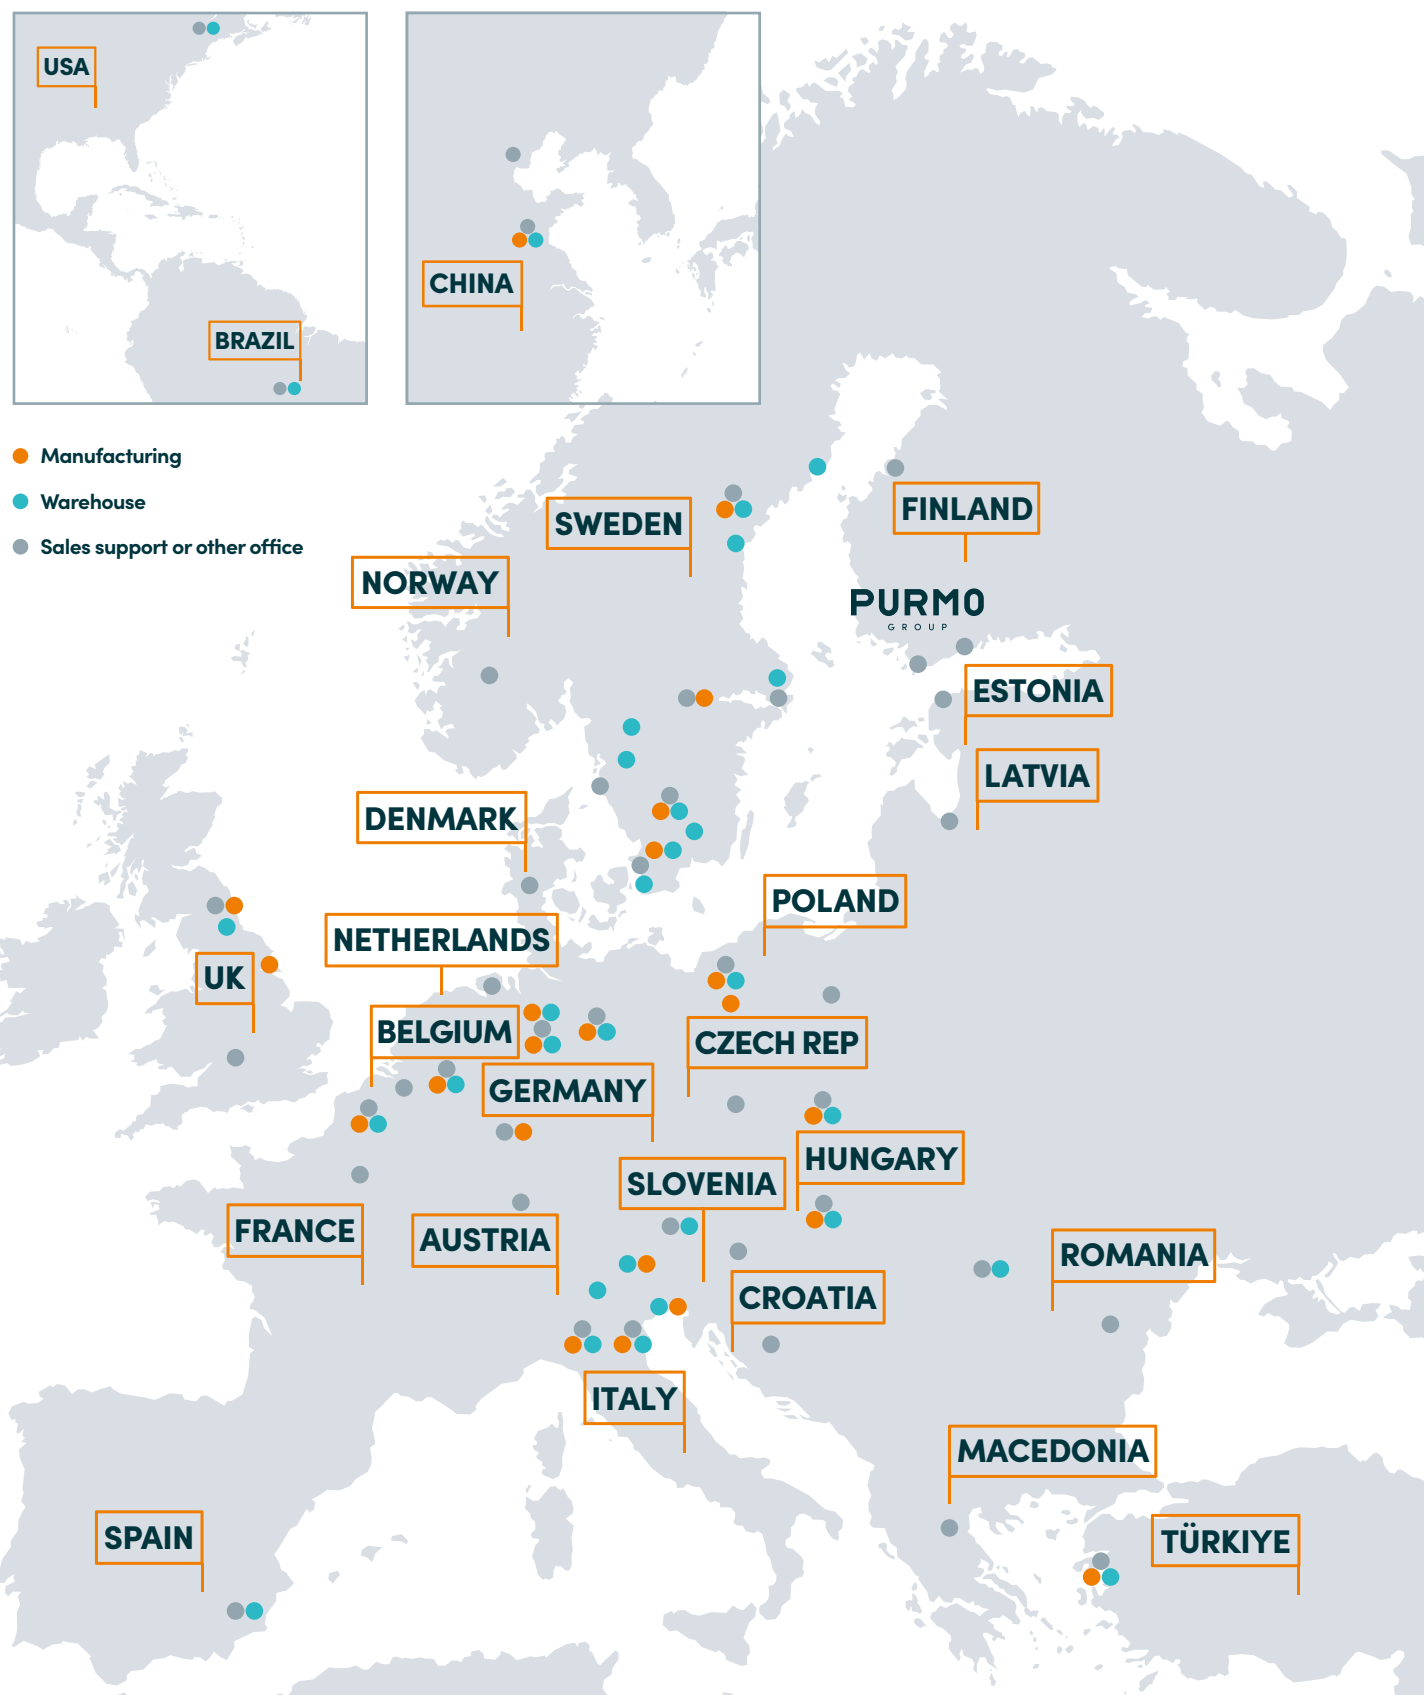

PURMO
GROUP

Purmo Group is Europe's Leader in sustainable indoor climate comfort solutions

Our heating and cooling systems are designed to offer the highest levels of comfort and efficiency.

Our vision

Comfort delivered is our promise to all our stakeholders. It's all about our dedication and our ability to deliver. About listening and responding to the needs of our personnel, our customers and end users.

Purmo Group delivers comfort by doing things smarter, by always moving forward, and by staying ahead of the competition.

We will drive the future of complete heating, cooling and ventilation solutions through state-of-the-art innovation – and we will continuously endeavour to ensure this is done in sustainable ways.

We are Purmo Group – Comfort delivered.

Manufacturing in
12 countries

Customers in
100+ countries

Operations in
24 countries

Our 10 commitments

1
Emissions and energy

2
Resource efficiency and waste

3
Responsible sourcing

4
Climate-smart choices

5
Circularity and end of life

6
Diversity, equality and inclusion

7
Engagement at work

8
Employee upskilling

9
Health and safety

10
Community engagement

Contents

Panel radiators				13	Underfloor heating				165
PREMIER HE	14	VERTICAL		34	FIXING SYSTEMS	170	CONTROLS		186
PREMIER METRIC	14	LST		40	PIPE	182	SINGLE ROOM PACKS		194
PREMIER COMPACT	14	LST VERTICAL		40					
SELECT COMPACT	28								
Premium panel radiators				49	Electric heating				199
PLAN	50	T6 COMPACT		60	FINESSE	200	ELECTRIC AVONMORE		210
PLAN PLUS	50	T6 PLAN		60	RIO COMPACT PLUS	202	TAMAR		212
PLAN VERTICAL	50	ULOW-E2		72	RIO PLAN PLUS	202	INNOKO		214
PLAN PLUS VERTICAL	50				RIO LINEA PLUS	202	ELECTRIC UNDERFLOOR HEATING		216
					ELECTRIC DÉCOR	206			
					ELECTRIC COLUMN	208			
Design radiators				79	Heating valves				219
COLUMN	80	OPUS		96	MATCHMATE	220	MYSON PLUS		234
DÉCOR	86				MATCHMASTER	222	LST TRV KITS		236
					FULLFLOW	224	REMOTE THERMOSTATS		238
					DECORATIVE TRV	226	AUTOMATIC BYPASS VALVES		240
					DECORATIVE SLIMLINE, MODERN & TRADITIONAL	228	HEATING VALVES ACCESSORIES		241
					TRV2	230			
					PETITE	232			
Towel warmers				101	Electronic controls				243
Contemporary	102	DEE		120	MRT1	244	TOUCH4		250
TOPAZ	104	INN		122	MRTE	245	MEP1C, MEP2C, MEP3C & MEPTWOZONE		251
FATALA	106	SAXBY		123	MCT1	246	MOTORISED VALVES & ACCESSORIES		252
INTERLUDE	107	THIRLMERE		124	MPRT	247	CONTROL PACKS		254
KASAI	108	ULLSWATER		125	TOUCH	248			
MARANOA	110	Multi-rail		126	TOUCH2 WiFi	249			
MERSEY	112	AVONMORE		128					
OUSE	113	ANGARA		130					
SOKOTO	114	FERLO		132					
STOUR	115	LINDI		134					
Traditional	116	TYNE		136					
AWE	118	TOWEL WARMERS ACCESSORIES		138					
BUTTERMERE	119								
Fan convectors				141	General Information				261
KICKSPACE®	142	HI-LINE LV		148	Colour Options	258	Index		262
HI-LINE RC	148	LO-LINE RC		148	Heat Output Calculation	260			
HI-LINE SUPER RC	148	IVECTOR MKII		156					

For prices please refer to the full price book. Contact customer services on **0330 0415474** for a copy.

Our promise

Comfort delivered


The indoors. The place where we spend so much time – learning, sleeping, relaxing, sharing. It's where we live. That's why a healthy and comfortable indoor climate is so important. But in a world facing climate challenges, unprecedented population growth and a need to use resources better, ensuring sustainability is paramount.

Committed to innovation, we take a system and solution approach to delivering optimal heating and cooling that offers the highest levels of comfort and energy efficiency. With our complete range and expert knowledge, we can help you find exactly the right solution – whether you're a planner, installer, wholesaler or homeowner. So, let's work together and create innovative solutions that will meet tomorrow's indoor climate challenges today. Let's advance indoor climates as we know them.

Comfort

delivered by ...



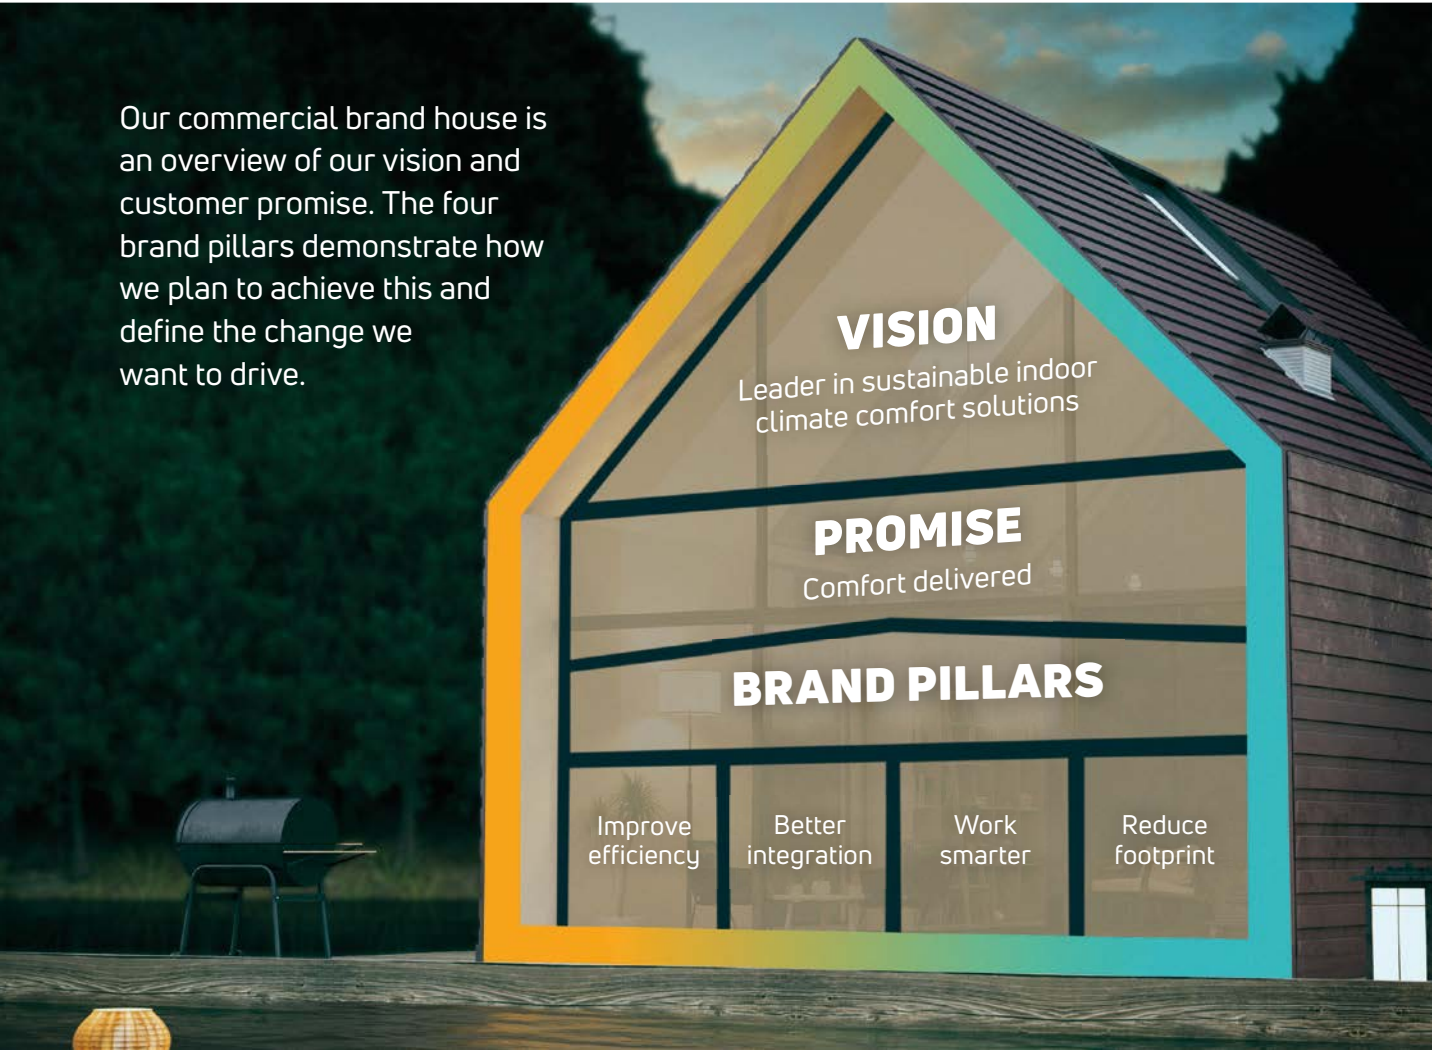

Our commercial brand house is an overview of our vision and customer promise. The four brand pillars demonstrate how we plan to achieve this and define the change we want to drive.

Improve efficiency

Optimise energy efficiency through system accuracy

Better integration

Let's **integrate solutions** in innovative systems for better performance

Work smarter

Let's work together and **work smarter**

Reduce footprint

Let's focus on the full product life cycle and **reduce impact on our climate**



MYSON provides complete, industry-leading solutions for hydronic, electrical and air-based heating and cooling systems.

We go beyond single products and components to offer an extensive portfolio that combines innovative design, R&D insight, extensive technical know-how and industry expertise. Our decades of experience enables us to offer integrated system designs which maximise comfort and minimise energy use, so that net zero becomes feasible without compromising indoor climate comfort.

The big picture

By delivering complete solutions we can offer indoor climate comfort that takes multiple aspects of performance optimisation into account and ensures that our solutions match customer needs.


This approach enables us to deliver higher energy efficiency, eg, by combining low temperature heat emitters with underfloor heating, we can deliver an optimal balance between swift changes in room temperatures and energy efficiency.

As one of the UK's leading brands, MYSON has made a commitment to help reduce CO₂ emissions with an extensive portfolio of solutions that enable you to balance the need for better indoor climate comfort with lower energy consumption, through market-leading, innovative eco-friendly technology.

With our broad range of low temperature heating products we can support the current changes to the building regulations and help to deliver net zero in the UK, starting with a 30% reduction of CO₂ emissions for new build homes.

- We optimise energy efficiency through system accuracy.
- We integrate solutions in innovative systems for better performance and lower energy consumption.
- We focus on reducing our ecological footprint in all aspects of our operations.

MYSON products are compatible with all heat sources and renewable energy sources. This is your guarantee of an economically and ecologically efficient heating solution.

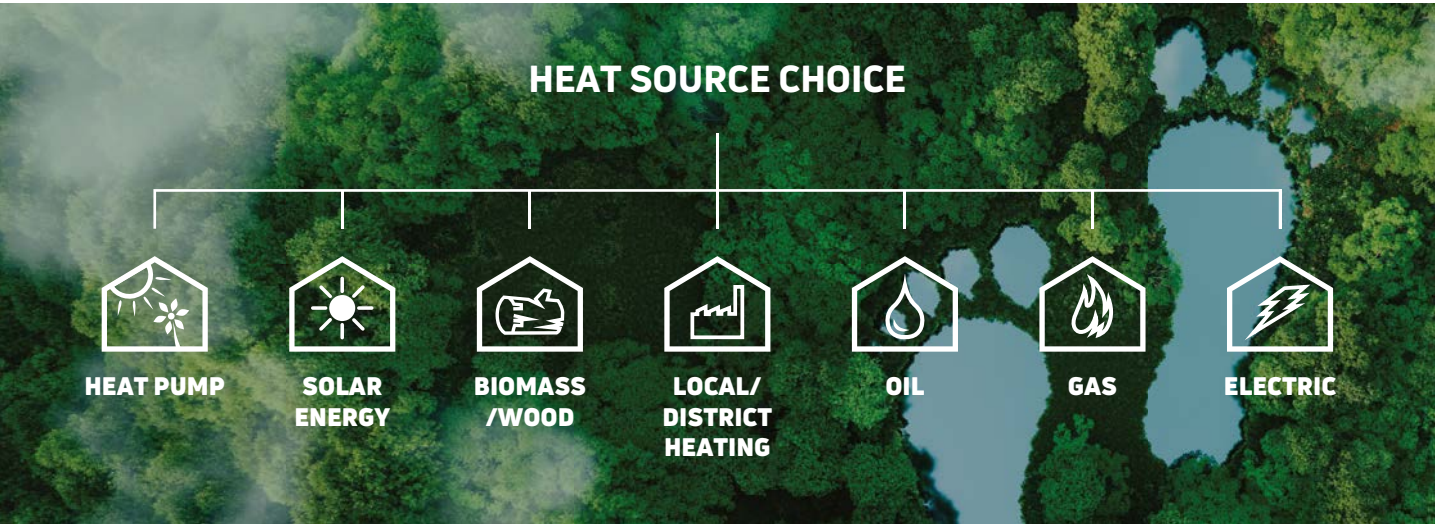



The UK's only total solutions provider

MYSON's expertise in the design, development and manufacture of heat emitters goes back over 50 years, making us one of the most trusted, reliable and innovative heat emitter manufacturers in Europe.

As the UK's only total heating solutions provider, MYSON is in a unique position to offer unbiased advice on the most effective indoor climate solutions, integrating mixed system layouts for maximum efficiency.

Our representatives are always there to make selecting our products easier for you, and our customer support team are on hand, ready to provide assistance when you might need it.



TECHNICAL SUPPORT

With years of knowledge about our products, our technical support team is here to assist with anything from practical support and advice to where to install our products.



DESIGN SERVICES

Our systems and solutions experts have years of experience in designing heating plans and we offer a full and complete design service for all our products, tailored to individual needs, that includes mixed system layouts.



BIM

Our core range of products are available to download via Bimstore, as well as the MYSON website, making it even easier to specify our products.



TRAINING

MYSON offers training workshops for installers or developers to show how easy it is to install our underfloor heating systems.





Panel radiators

MYSON has been manufacturing traditional steel panel radiators in the UK for over 60 years. Our experience and expertise in this area makes us one of the most trusted, reliable and innovative heating solutions providers in Europe. The range includes classics from our respected SELECT and PREMIER ranges, space saving solutions with the VERTICAL and safety products, such as the LST - available in horizontal and vertical models.

Our SELECT and PREMIER ranges include single, double, double panel extra and compact models, and we also have a range of triple panels within our SELECT COMPACT range.





MYSON's PREMIER range sets the benchmark for panel radiators in the UK market. As the only UK panel radiator range offering imperial fitting dimensions, MYSON's PREMIER HE is the perfect panel radiator for retro fitting projects. The PREMIER METRIC offers the metric equivalent and, through the addition of side and top grilles, the PREMIER COMPACT model provides a sleeker alternative styling.

- Stylish and hazard reducing round top design
- Manufactured in the UK to the highest production standards
- Impressive heat outputs at low energy consumption
- Extensive range of size options
- PREMIER COMPACT comes with factory fitted top grille and side panels as standard



PREMIER HE, PREMIER METRIC & PREMIER COMPACT



PREMIER HE

PREMIER HE

General specification & technical information

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the BS Kitemark, CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
All radiators are de-greased, phosphated and primer coated. An epoxy polyester finishing coat in white (RAL 9016) is applied to all front and rear surfaces.
- ACCESSORIES**
Touch up paint available on request.
- SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.
- CONNECTIONS**
2 x 1/2" BSP as standard. Selected sizes available with 4 x 1/2" BSP, please see below.
- AIR VENTS**
Unique integral air vent situated top right corner of panel, on the 2 tap models only.
- OPERATING PRESSURES**
Tested to a pressure of 7 bar.
Working pressure of up to 5.4 bar.
- OPERATING TEMPERATURE**
Maximum 100°C.
- DELIVERY**
2 - 5 working days.
- VALVES**
Please see page 219.
- BIM**
Visit our website to download the BIM components
www.myson.co.uk/bim

For more general information, please see page 256.

Weights & water contents per metre length

Type		Nominal Height (in)							
		12		15		21		27	
		Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
11	SC	8.2	2.8	10.6	3.2	14.7	4.0	19.3	5.1
21	DPX	-	-	18.0	6.4	24.7	8.3	32.4	9.9
22	DC	16.3	5.8	20.7	6.4	29.1	8.3	38.2	9.9

n-Coefficients

Type		Nominal Height (in)			
		12	15	21	27
11	SC	1.2692	1.2728	1.2783	1.3079
21	DPX	-	1.2850	1.2995	1.3136
22	DC	1.2825	1.2988	1.3241	1.3246

Connection options
2 x 1/2" BSP
4 x 1/2" BSP

2 & 4 tap versions

(4 tap version only)


(4 tap version only)

(4 tap version only)

(4 tap version only)


Mounting positions, dimensions & wall brackets

2 connections*

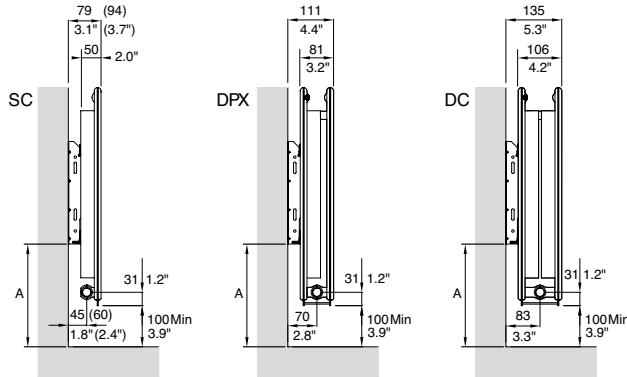


Nominal Height (in)	A		B	
	(in)	(mm)	(in)	(mm)
12	6.65	170	N/A	N/A
15	6.93	177	13.2	335
21	9.81	250	18.7	475
27	16.10	410	25.0	635



4 connections**

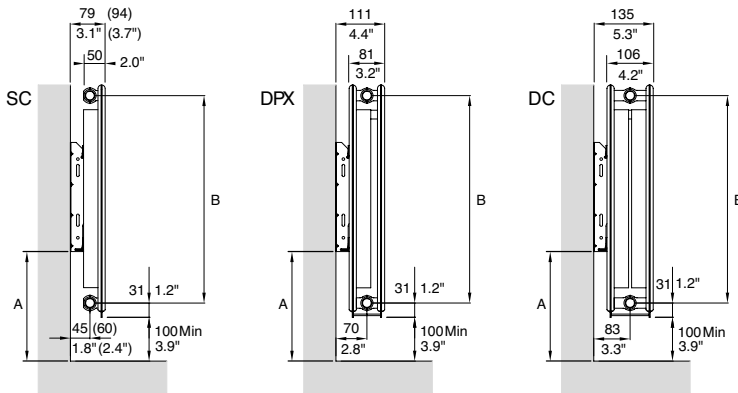

12" Wall Bracket***



15/21/27" Wall Bracket***



Bracket Plan View

N.B. Figures in brackets apply when hanging with long leg.
Long leg suitable for hanging Type 11 (SC) radiators only.
Short leg suitable for radiator Types 11, 21 & 22.


*Available for full range

**Available for selected sizes

***Security clip available on request

NB: All measurements are nominal.

Bracket positions & dimensions

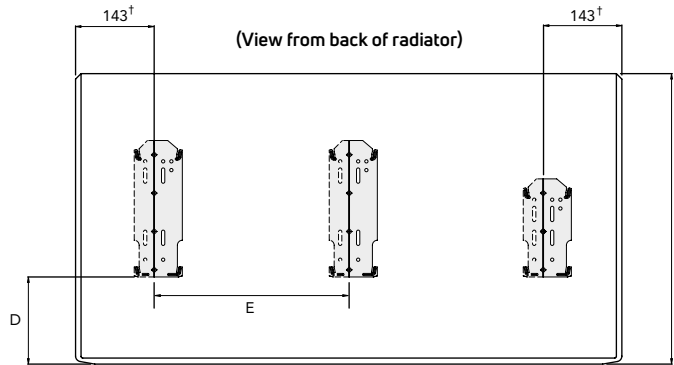

Nominal Height (in)	C		D	
	(in)	(mm)	(in)	(mm)
12	11.8	300	2.75	70
15	15.4	390	3.03	77
21	20.9	530	5.91	150
27	27.2	690	12.20	310

Nominal Length (in)	E	
	(in)	(mm)
77	34	864
79	35	889
85	38	965

N.B. Radiators up to and including 69" long have two brackets. Radiators 77" and longer have three brackets. The position of the centre bracket is given in the table.

† 118mm from each end for 11" (286mm) long radiators only.

PREMIER HE

Heat outputs

PANEL RADIATORS

PANEL RADIATORS


Single Convector
Type 11



Nominal Height	Nominal Length (inches - mm)	No. of sections
12 inch (300mm)	15 - 400	8
	31 - 800	16
	47 - 1200	24
	63 - 1600	32
	79 - 2000	40
15 inch (390mm)	21 - 540	11
	25 - 641	13
	29 - 743	15
	37 - 946	19
	41 - 1047	21
	45 - 1149	23
	49 - 1251	25
	53 - 1352	27
	57 - 1454	29
	61 - 1556	31
	69 - 1759	35
	77 - 1962	39
21 inch (530mm)	85 - 2165	43
	17 - 438	9
	21 - 540	11
	25 - 641	13
	29 - 743	15
	33 - 844	17
	37 - 946	19
	41 - 1047	21
	45 - 1149	23
	49 - 1251	25
	53 - 1352	27
	57 - 1454	29
27 inch (690mm)	61 - 1556	31
	69 - 1759	35
	77 - 1962	39
	85 - 2165	43
	11 - 286	6
	17 - 438	9
	21 - 540	11
	25 - 641	13
	29 - 743	15
	33 - 844	17
	37 - 946	19
	41 - 1047	21


Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
199	680	104	356	12 SC 15
409	1395	214	730	12 SC 31
618	2109	323	1103	12 SC 47
828	2824	433	1477	12 SC 63
354	1207	185	630	15 SC 21
420	1433	219	748	15 SC 25
487	1661	254	867	15 SC 29
620	2114	323	1104	15 SC 37*
686	2342	358	1222	15 SC 41*
753	2568	393	1340	15 SC 45*
819	2796	428	1459	15 SC 49*
886	3024	463	1578	15 SC 53*
952	3249	497	1696	15 SC 57
1019	3477	532	1815	15 SC 61
1152	3931	601	2052	15 SC 69
1285	4385	671	2289	15 SC 77
375	1281	195	667	21 SC 17*
463	1579	241	822	21 SC 21*
549	1874	286	976	21 SC 25*
637	2173	331	1131	21 SC 29*
724	2471	377	1286	21 SC 33*
811	2766	422	1440	21 SC 37*
898	3064	467	1595	21 SC 41*
985	3360	513	1749	21 SC 45*
1072	3658	558	1904	21 SC 49*
1160	3956	604	2059	21 SC 53*
1246	4252	649	2213	21 SC 57*
1333	4550	694	2368	21 SC 61*
1507	5143	785	2677	21 SC 69*
1681	5737	875	2986	21 SC 77
1855	6331	966	3295	21 SC 85
305	1042	157	534	27 SC 11*
468	1596	240	818	27 SC 17*
577	1968	296	1009	27 SC 21*
685	2336	351	1198	27 SC 25*
794	2708	407	1388	27 SC 29*
902	3079	463	1579	27 SC 33*
1010	3447	518	1767	27 SC 37*
1119	3819	574	1958	27 SC 41*
1227	4187	629	2147	27 SC 45*
1445	4930	741	2528	27 SC 53
1662	5670	852	2907	27 SC 61
1879	6410	963	3286	27 SC 69

Double Panel “Xtra”
Type 21



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
723	2467	375	1279	15 DPX 29
920	3141	477	1629	15 DPX 37*
1020	3479	529	1805	15 DPX 41*
1118	3815	580	1979	15 DPX 45*
1217	4153	631	2154	15 DPX 49*
1316	4492	683	2330	15 DPX 53*
1415	4827	734	2504	15 DPX 57*
1514	5166	785	2680	15 DPX 61
1712	5840	888	3029	15 DPX 69
1909	6514	990	3379	15 DPX 77
550	1876	283	966	21 DPX 17*
678	2312	349	1191	21 DPX 21*
804	2745	414	1413	21 DPX 25*
932	3182	480	1638	21 DPX 29*
1060	3618	546	1863	21 DPX 33*
1187	4051	611	2086	21 DPX 37*
1315	4488	677	2311	21 DPX 41*
1442	4920	742	2533	21 DPX 45*
1570	5357	808	2758	21 DPX 49*
1698	5794	874	2983	21 DPX 53*
1825	6226	940	3206	21 DPX 57
1953	6663	1005	3431	21 DPX 61
2208	7532	1137	3878	21 DPX 69
2462	8401	1268	4326	21 DPX 77
687	2343	351	1198	27 DPX 17*
847	2889	433	1477	27 DPX 21*
1005	3429	514	1753	27 DPX 25*
1165	3975	596	2032	27 DPX 29*
1325	4521	677	2311	27 DPX 33*
1483	5061	758	2587	27 DPX 37*
1643	5607	840	2866	27 DPX 41
1802	6147	921	3142	27 DPX 45
2122	7239	1084	3700	27 DPX 53
2440	8325	1247	4255	27 DPX 61

Double Convector
Type 22



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
795	2712	413	1408	12 DC 31
1201	4098	624	2129	12 DC 47
1609	5489	835	2851	12 DC 63
2015	6875	1047	3571	12 DC 79
675	2303	348	1186	15 DC 21
801	2734	413	1408	15 DC 25
929	3169	478	1632	15 DC 29*
1183	4035	609	2078	15 DC 37*
1310	4470	675	2302	15 DC 41*
1436	4900	740	2524	15 DC 45*
1564	5336	805	2748	15 DC 49*
1691	5771	871	2972	15 DC 53*
1818	6201	936	3194	15 DC 57
1945	6636	1002	3418	15 DC 61
2199	7502	1133	3864	15 DC 69
2453	8368	1263	4310	15 DC 77
2706	9234	1394	4756	15 DC 85
706	2411	359	1226	21 DC 17*
871	2972	443	1511	21 DC 21*
1034	3528	526	1794	21 DC 25*
1198	4089	609	2079	21 DC 29*
1363	4651	693	2365	21 DC 33*
1526	5206	776	2647	21 DC 37*
1690	5768	859	2933	21 DC 41*
1853	6324	942	3215	21 DC 45*
2018	6885	1026	3501	21 DC 49*
2182	7446	1110	3786	21 DC 53*
2345	8002	1192	4069	21 DC 57
2510	8564	1276	4354	21 DC 61
2837	9681	1443	4922	21 DC 69
3165	10798	1609	5490	21 DC 77
3492	11915	1776	6058	21 DC 85
572	1951	291	992	27 DC 11*
876	2987	445	1519	27 DC 17*
1079	3683	549	1872	27 DC 21*
1281	4372	651	2222	27 DC 25*
1485	5068	755	2576	27 DC 29*
1689	5763	859	2930	27 DC 33*
1891	6452	961	3280	27 DC 37*
2095	7148	1065	3633	27 DC 41*
2297	7837	1168	3984	27 DC 45*
2705	9228	1375	4691	27 DC 53
3110	10613	1581	5395	27 DC 61
3516	11997	1787	6099	27 DC 69

*Available as a 4 tap option.

PREMIER METRIC

General specification & technical information

CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the BS Kitemark, CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018.

GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.

COLOUR
All radiators are de-greased, phosphated and primer coated. An epoxy polyester finishing coat in white (RAL 9016) is applied to all front and rear surfaces.

ACCESSORIES
Touch up paint available on request.

SYSTEM
2 pipe pumped indirect domestic and commercial heating applications.

CONNECTIONS
4 x 1/2" BSP. Please see below.

AIR VENTS
Air vent and plug packs are included in the packaging.

OPERATING PRESSURES
Tested to a pressure of 7 bar.
Working pressure of up to 5.4 bar.

OPERATING TEMPERATURE
Maximum 100°C.

DELIVERY
2 - 5 working days.

VALVES
Please see page 219.

BIM
Visit our website to download the BIM components
www.myson.co.uk/bim

For more general information, please see page 256.

Weights & water contents per metre length

Type		Nominal Height (mm)							
		300		450		600		700	
		Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
11	SC	8.3	2.8	12.4	3.4	16.7	4.1	19.6	4.9
21	DPX	14.3	5.7	20.9	6.7	28.0	8.3	32.5	9.9
22	DC	17.1	5.7	24.2	6.7	32.8	8.3	38.2	9.9

n-Coefficients

Type		Nominal Height (mm)			
		300	450	600	700
11	SC	1.2692	1.2751	1.2913	1.3098
21	DPX	1.2757	1.2912	1.3057	1.3145
22	DC	1.2825	1.3096	1.3243	1.3246

Connection options
4 x 1/2" BSP

Mounting positions, dimensions & wall brackets

Nominal Height (mm)	A (mm)	B (mm)
300	170	243
450	237	393
600	320	543
700	410	643

N.B. Figures in brackets apply when hanging with long leg.
Long leg suitable for hanging Type 11 (SC) radiators only. Short leg suitable for radiator Types 11, 21 & 22.

*Security clip available on request

NB: All measurements are nominal.

Bracket positions & dimensions

Nominal Height (mm)	C (mm)	D (mm)
300	300	70
450	450	137
600	600	220
700	700	310

Nominal Length (mm)	E (mm)
1800	762
2000	864
2200	965
2400	1067
2600	1168
2800	1270
3000	1372

N.B. Radiators up to and including 1600mm long have two brackets. Radiators 1800mm and longer have three brackets. The position of the centre bracket is given in the table.

† 118mm from each end for 300mm long radiators only.


PREMIER METRIC

Heat outputs

PANEL RADIATORS

PANEL RADIATORS


Single Convector
Type 11



Double Panel “Xtra”
Type 21



Double Convector
Type 22



Nominal Height	Nominal Length (mm)
300mm	400
	800
	1200
	1600
	2000
	2400
	3000

450mm	400
	500
	600
	700
	800
	900
	1000
	1100
	1200
	1400
	1600
	1800
	2000
	2200
	2400
	2600
	2800
	3000

600mm	400
	500
	600
	700
	800
	900
	1000
	1100
	1200
	1400
	1600
	1800
	2000
	2200
	2400
	2600
	2800
	3000

700mm	300
	400
	500
	600
	700
	800
	900
	1000
	1100
	1200
	1400
	1600
	1800
	2000
	2200
	2400
	2600
	2800
	3000

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
199	680	104	356	4PM 30 SC 40
409	1395	214	730	4PM 30 SC 80
618	2109	323	1103	4PM 30 SC 120
828	2824	433	1477	4PM 30 SC 160
1037	3537	542	1850	4PM 30 SC 200
1246	4251	651	2223	4PM 30 SC 240
1560	5322	816	2783	4PM 30 SC 300

288	982	150	512	4PM 45 SC 40
364	1241	190	647	4PM 45 SC 50
440	1500	229	782	4PM 45 SC 60
515	1757	268	916	4PM 45 SC 70
591	2016	308	1051	4PM 45 SC 80
666	2272	347	1184	4PM 45 SC 90
742	2531	387	1319	4PM 45 SC 100
818	2790	426	1454	4PM 45 SC 110
893	3046	465	1588	4PM 45 SC 120
1044	3562	544	1857	4PM 45 SC 140
1196	4079	623	2127	4PM 45 SC 160
1347	4595	702	2395	4PM 45 SC 180
1498	5110	781	2664	4PM 45 SC 200
1649	5626	860	2933	4PM 45 SC 220
1800	6142	938	3202	4PM 45 SC 240
1951	6657	1017	3471	4PM 45 SC 260
2102	7173	1096	3740	4PM 45 SC 280
2254	7689	1175	4009	4PM 45 SC 300

368	1257	190	650	4PM 60 SC 40
466	1588	241	821	4PM 60 SC 50
563	1920	291	993	4PM 60 SC 60
659	2248	341	1162	4PM 60 SC 70
756	2579	391	1334	4PM 60 SC 80
852	2907	441	1503	4PM 60 SC 90
949	3238	491	1674	4PM 60 SC 100
1046	3570	541	1846	4PM 60 SC 110
1142	3898	591	2015	4PM 60 SC 120
1336	4557	691	2356	4PM 60 SC 140
1530	5220	791	2699	4PM 60 SC 160
1723	5879	891	3040	4PM 60 SC 180
1916	6539	991	3381	4PM 60 SC 200
2110	7199	1091	3722	4PM 60 SC 220
2303	7857	1191	4063	4PM 60 SC 240
2497	8520	1291	4405	4PM 60 SC 260
2690	9179	1391	4746	4PM 60 SC 280
2884	9839	1491	5087	4PM 60 SC 300

305	1042	156	534	4PM 70 SC 30
418	1426	214	730	4PM 70 SC 40
528	1802	270	923	4PM 70 SC 50
638	2178	327	1115	4PM 70 SC 60
747	2550	383	1306	4PM 70 SC 70
858	2926	439	1499	4PM 70 SC 80
967	3298	495	1689	4PM 70 SC 90
1077	3674	551	1882	4PM 70 SC 100
1187	4050	608	2074	4PM 70 SC 110
1296	4422	664	2265	4PM 70 SC 120
1515	5170	776	2648	4PM 70 SC 140
1736	5922	889	3033	4PM 70 SC 160
1955	6670	1001	3416	4PM 70 SC 180
2174	7418	1113	3799	4PM 70 SC 200
2393	8166	1226	4182	4PM 70 SC 220
2613	8914	1338	4566	4PM 70 SC 240
2833	9666	1451	4951	4PM 70 SC 260
3052	10414	1563	5334	4PM 70 SC 280
3271	11162	1676	5717	4PM 70 SC 300

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
304	1037	158	540	4PM 30 DPX 40
623	2127	325	1108	4PM 30 DPX 80
942	3214	491	1675	4PM 30 DPX 120
1261	4304	657	2243	4PM 30 DPX 160
1580	5392	824	2810	4PM 30 DPX 200

424	1446	219	748	4PM 45 DPX 40
535	1827	277	945	4PM 45 DPX 50
647	2208	335	1142	4PM 45 DPX 60
758	2585	392	1337	4PM 45 DPX 70
869	2966	450	1534	4PM 45 DPX 80
980	3344	507	1729	4PM 45 DPX 90
1092	3725	564	1926	4PM 45 DPX 100
1203	4106	622	2123	4PM 45 DPX 110
1314	4483	679	2318	4PM 45 DPX 120
1536	5242	794	2710	4PM 45 DPX 140
1760	6004	910	3104	4PM 45 DPX 160
1982	6762	1025	3497	4PM 45 DPX 180
2204	7521	1140	3889	4PM 45 DPX 200

539	1839	277	944	4PM 60 DPX 40
681	2324	350	1193	4PM 60 DPX 50
823	2809	423	1442	4PM 60 DPX 60
964	3289	495	1688	4PM 60 DPX 70
1106	3774	568	1937	4PM 60 DPX 80
1247	4254	640	2183	4PM 60 DPX 90
1389	4739	713	2432	4PM 60 DPX 100
1531	5223	786	2681	4PM 60 DPX 110
1672	5703	858	2927	4PM 60 DPX 120
1954	6668	1003	3423	4PM 60 DPX 140
2239	7638	1149	3920	4PM 60 DPX 160
2521	8603	1294	4415	4PM 60 DPX 180
2804	9568	1439	4911	4PM 60 DPX 200

615	2097	314	1071	4PM 70 DPX 40
777	2650	397	1354	4PM 70 DPX 50
939	3202	480	1636	4PM 70 DPX 60
1099	3749	561	1916	4PM 70 DPX 70
1261	4302	644	2198	4PM 70 DPX 80
1421	4849	726	2478	4PM 70 DPX 90
1583	5402	809	2760	4PM 70 DPX 100
1745	5955	892	3043	4PM 70 DPX 110
1906	6502	974	3322	4PM 70 DPX 120
2228	7602	1138	3884	4PM 70 DPX 140
2552	8707	1304	4449	4PM 70 DPX 160
2874	9807	1469	5011	4PM 70 DPX 180
3197	10907	1633	5573	4PM 70 DPX 200

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
387	1322	201	686	4PM 30 DC 40
795	2712	413	1408	4PM 30 DC 80
1201	4098	624	2129	4PM 30 DC 120
1609	5489	835	2851	4PM 30 DC 160
2015	6875	1047	3571	4PM 30 DC 200
2421	8262	1258	4291	4PM 30 DC 240
3032	10345	1575	5373	4PM 30 DC 300

545	1861	279	953	4PM 45 DC 40
689	2351	353	1204	4PM 45 DC 50
833	2841	427	1455	4PM 45 DC 60
975	3327	499	1704	4PM 45 DC 70
1119	3817	573	1955	4PM 45 DC 80
1261	4303	646	2204	4PM 45 DC 90
1405	4793	720	2455	4PM 45 DC 100
1548	5283	793	2706	4PM 45 DC 110
1691	5769	866	2955	4PM 45 DC 120
1977	6745	1013	3455	4PM 45 DC 140
2264	7726	1160	3957	4PM 45 DC 160
2550	8702	1306	4457	4PM 45 DC 180
2836	9678	1453	4957	4PM 45 DC 200
3123	10654	1600	5458	4PM 45 DC 220
3409	11631	1746	5958	4PM 45 DC 240
3695	12608	1893	6458	4PM 45 DC 260
3981	13585	2039	6959	4PM 45 DC 280
4268	14562	2186	7459	4PM 45 DC 300

691	2357	351	1198	4PM 60 DC 40
873	2978	444	1514	4PM 60 DC 50
1055	3599	536	1830	4PM 60 DC 60
1235	4215	628	2143	4PM 60 DC 70
1417	4836	721	2459	4PM 60 DC 80
1598	5451	812	2771	4PM 60 DC 90
1780	6072	905	3087	4PM 60 DC 100
1962	6693	997	3403	4PM 60 DC 110
2142	7309	1089	3716	4PM 60 DC 120
2504	8545	1273	4344	4PM 60 DC 140
2868	9787	1458	4976	4PM 60 DC 160
3231	11024	1643	5604	4PM 60 DC 180
3593	12260	1827	6233	4PM 60 DC 200
3956	13496	2011	6862	4PM 60 DC 220
4318	14733	2195	7490	4PM 60 DC 240
4682	15975	2380	8122	4PM 60 DC 260
5044	17212	2565	8750	4PM 60 DC 280
5407	18448	2749	9379	4PM 60 DC 300

572	1951	291	992	4PM 70 DC 30
783	2670	398	1357	4PM 70 DC 40
989	3374	503	1715	4PM 70 DC 50
1195	4077	607	2073	4PM 70 DC 60
1399	4774	711	2427	4PM 70 DC 70
1605	5478	816	2785	4PM 70 DC 80
1810	6175	920	3139	4PM 70 DC 90
2016	6878	1025	3496	4PM 70 DC 100
2222	7582	1130	3854	4PM 70 DC 110
2426	8279	1233	4208	4PM 70 DC 120
2837	9679	1442	4920	4PM 70 DC 140
3249	11087	1652	5636	4PM 70 DC 160
3660	12487	1860	6348	4PM 70 DC 180
4070	13888	2069	7059	4PM 70 DC 200
4481	15288	2278	7771	4PM 70 DC 220
4891	16689	2486	8483	4PM 70 DC 240
5304	18096	2696	9199	4PM 70 DC 260
5714	19497	2905	9911	4PM 70 DC 280
6125	20897	3113	10623	4PM 70 DC 300

PREMIER COMPACT

General specification & technical information

CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the BS Kitemark, CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018.

GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.

COLOUR
All radiators are de-greased, phosphated and primer coated. An epoxy polyester finishing coat in white (RAL 9016) is applied to all front and rear surfaces.

ACCESSORIES
Touch up paint available on request.

SYSTEM
2 pipe pumped indirect domestic and commercial heating applications.

CONNECTIONS
4 x 1/2" BSP. Please see below.

AIR VENTS
Air vent and plug packs are included in the packaging.

OPERATING PRESSURES
Tested to a pressure of 7 bar.
Working pressure of up to 5.4 bar.

OPERATING TEMPERATURE
Maximum 100°C.


DELIVERY
2 - 5 working days.

VALVES
Please see page 219.

BIM
Visit our website to download the BIM components
www.myson.co.uk/bim


For more general information, please see page 256.

Mounting positions, dimensions & wall brackets

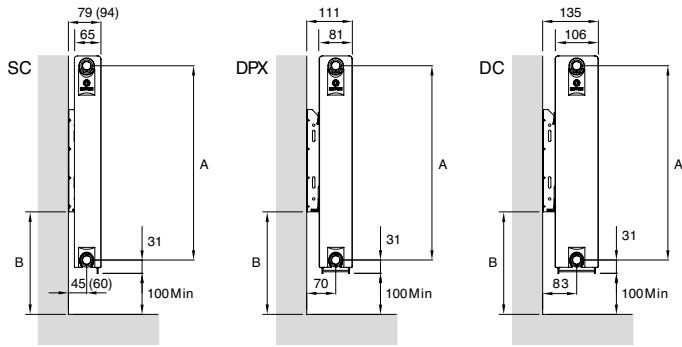


Nominal Height (mm)	A (mm)	B (mm)
300	245	170
450	395	237
600	545	320
700	645	410


300mm Wall Bracket*

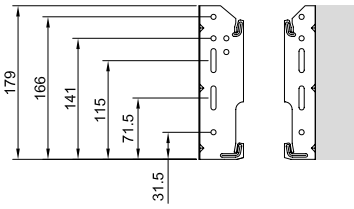

450/600/700mm Wall Bracket*



Bracket Plan View

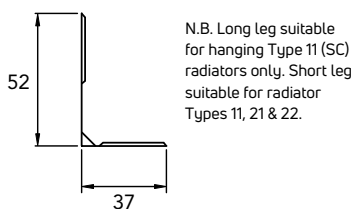

*Security clip available on request

NB: All measurements are nominal.


Weights & water contents per metre length

Type		Nominal Height (mm)							
		300		450		600		700	
		Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
11	SC	9.8	2.8	14.2	3.4	18.8	4.1	21.7	4.9
21	DPX	15.4	5.7	22.0	6.7	29.9	8.3	34.6	9.9
22	DC	18.4	5.7	26.1	6.7	34.8	8.3	40.5	9.9

n-Coefficients

Type		Nominal Height (mm)			
		300	450	600	700
11	SC	1.2825	1.2878	1.3042	1.3236
21	DPX	1.2217	1.2622	1.2925	1.3049
22	DC	1.2522	1.2951	1.3307	1.3489

Bracket positions & dimensions

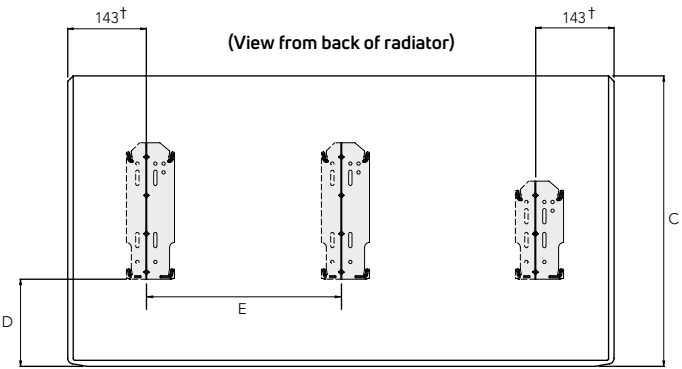

Nominal Height (mm)	C (mm)	D (mm)
300	300	70
450	450	137
600	600	220
700	700	310

Nominal Length (mm)	E (mm)
1800	762
2000	864

N.B. Only radiators 1800mm & 2000mm long have 3 sets of brackets as shown, with the 3rd set in the middle of the radiator. The position of the centre bracket is given in the table.

† 118mm from each end for 300mm long radiators only.

Connection options
4 x 1/2" BSP

PREMIER COMPACT

Heat outputs

PANEL RADIATORS


Single Convector
Type 11



Nominal Height	Nominal Length (mm)
300mm	400
	600
	800
	1000
	1200
	1600
	2000
450mm	400
	500
	600
	700
	800
	900
	1000
	1100
	1200
	1400
	1600
	1800
	2000
600mm	400
	500
	600
	700
	800
	900
	1000
	1100
	1200
	1400
	1600
	1800
	2000
700mm	300
	400
	500
	600
	700
	800
	900
	1000
	1100
	1200
	1400
	1600


Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
191	652	99	339	30 SC 40 G
292	996	152	518	30 SC 60 G
392	1338	204	695	30 SC 80 G
593	2023	308	1051	30 SC 120 G
794	2709	412	1407	30 SC 160 G
994	3393	516	1762	30 SC 200 G
272	927	141	480	45 SC 40 G
343	1171	178	607	45 SC 50 G
415	1416	215	733	45 SC 60 G
486	1657	252	859	45 SC 70 G
557	1902	289	985	45 SC 80 G
628	2144	325	1110	45 SC 90 G
700	2388	363	1237	45 SC 100 G
771	2632	400	1363	45 SC 110 G
842	2874	436	1489	45 SC 120 G
985	3360	510	1741	45 SC 140 G
1128	3849	584	1994	45 SC 160 G
1271	4335	658	2246	45 SC 180 G
1413	4822	732	2497	45 SC 200 G
354	1210	182	621	60 SC 40 G
448	1528	230	785	60 SC 50 G
541	1847	278	949	60 SC 60 G
634	2163	326	1111	60 SC 70 G
727	2482	374	1275	60 SC 80 G
820	2797	421	1437	60 SC 90 G
913	3116	469	1601	60 SC 100 G
1007	3435	517	1764	60 SC 110 G
1099	3750	565	1926	60 SC 120 G
1285	4385	660	2252	60 SC 140 G
1472	5023	756	2580	60 SC 160 G
1658	5657	852	2906	60 SC 180 G
1844	6291	947	3232	60 SC 200 G
300	1023	152	520	70 SC 30 G
411	1404	209	714	70 SC 40 G
520	1774	264	902	70 SC 50 G
628	2144	320	1090	70 SC 60 G
736	2510	374	1276	70 SC 70 G
844	2880	429	1465	70 SC 80 G
951	3246	484	1651	70 SC 90 G
1060	3616	539	1839	70 SC 100 G
1168	3986	594	2027	70 SC 110 G
1276	4352	649	2214	70 SC 120 G
1491	5089	758	2588	70 SC 140 G
1708	5829	869	2964	70 SC 160 G

Double Panel “Xtra”
Type 21



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
584	1991	313	1067	30 DPX 80 G
882	3009	473	1612	30 DPX 120 G
1181	4030	633	2159	30 DPX 160 G
796	2715	418	1425	45 DPX 80 G
897	3060	471	1606	45 DPX 90 G
999	3409	524	1789	45 DPX 100 G
1101	3757	578	1972	45 DPX 110 G
1202	4103	631	2153	45 DPX 120 G
1406	4797	738	2517	45 DPX 140 G
1610	5494	845	2883	45 DPX 160 G
1814	6188	952	3247	45 DPX 180 G
491	1674	254	865	60 DPX 40 G
620	2116	320	1093	60 DPX 50 G
749	2557	387	1321	60 DPX 60 G
877	2994	453	1547	60 DPX 70 G
1007	3435	520	1775	60 DPX 80 G
1135	3872	586	2001	60 DPX 90 G
1264	4313	653	2229	60 DPX 100 G
1394	4755	720	2457	60 DPX 110 G
1522	5192	786	2683	60 DPX 120 G
1779	6070	919	3137	60 DPX 140 G
2038	6953	1053	3593	60 DPX 160 G
2295	7831	1186	4046	60 DPX 180 G
2552	8709	1319	4500	60 DPX 200 G
561	1915	288	983	70 DPX 40 G
709	2419	364	1242	70 DPX 50 G
857	2924	440	1501	70 DPX 60 G
1003	3424	515	1758	70 DPX 70 G
1151	3928	591	2017	70 DPX 80 G
1298	4428	666	2274	70 DPX 90 G
1446	4933	742	2533	70 DPX 100 G
1594	5437	818	2792	70 DPX 110 G
1740	5937	893	3048	70 DPX 120 G
2034	6941	1045	3564	70 DPX 140 G
2330	7950	1196	4082	70 DPX 160 G

Double Convector
Type 22



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
353	1206	186	636	30 DC 40 G
540	1842	285	972	30 DC 60 G
725	2473	382	1305	30 DC 80 G
910	3106	480	1638	30 DC 100 G
1096	3738	578	1972	30 DC 120 G
1467	5006	774	2641	30 DC 160 G
1838	6271	969	3308	30 DC 200 G
518	1767	267	912	45 DC 40 G
654	2232	338	1152	45 DC 50 G
791	2698	408	1392	45 DC 60 G
926	3159	478	1630	45 DC 70 G
1062	3625	548	1871	45 DC 80 G
1198	4086	618	2108	45 DC 90 G
1334	4552	688	2349	45 DC 100 G
1470	5017	759	2589	45 DC 110 G
1606	5478	829	2827	45 DC 120 G
1877	6405	969	3305	45 DC 140 G
2150	7336	1110	3786	45 DC 160 G
2422	8263	1250	4264	45 DC 180 G
2693	9190	1390	4742	45 DC 200 G
662	2258	335	1144	60 DC 40 G
836	2853	424	1446	60 DC 50 G
1011	3448	512	1747	60 DC 60 G
1183	4037	600	2046	60 DC 70 G
1358	4633	688	2348	60 DC 80 G
1530	5222	776	2646	60 DC 90 G
1705	5817	864	2948	60 DC 100 G
1879	6412	952	3249	60 DC 110 G
2052	7001	1040	3548	60 DC 120 G
2399	8186	1216	4148	60 DC 140 G
2748	9376	1393	4751	60 DC 160 G
3095	10560	1568	5351	60 DC 180 G
3442	11745	1744	5952	60 DC 200 G
545	1861	274	934	70 DC 30 G
746	2546	375	1278	70 DC 40 G
943	3217	473	1615	70 DC 50 G
1139	3888	572	1952	70 DC 60 G
1334	4552	670	2285	70 DC 70 G
1531	5223	769	2622	70 DC 80 G
1726	5888	866	2956	70 DC 90 G
1922	6559	965	3293	70 DC 100 G
2119	7230	1064	3630	70 DC 110 G
2314	7894	1162	3963	70 DC 120 G
2705	9229	1358	4634	70 DC 140 G
3098	10571	1556	5307	70 DC 160 G

PANEL RADIATORS



The SELECT COMPACT is the ultimate in radiator design. It uses a 33mm pitch, which our years of manufacturing expertise and research have established to be the optimum design for a Compact radiator. The SELECT COMPACT delivers impressive outputs whilst using a low water temperature.

- Our most extensive range, the SELECT COMPACT is available in 222 different sizes
- It comes in four types; single convector, double convector, double panel extra and triple convector type radiator, all with factory fitted top grille and side panels as standard
- There are seven different heights ranging from 300mm to 900mm
- We offer lengths from 300mm to 2400mm



SELECT COMPACT



TYPE 11



TYPE 21



TYPE 22



TYPE 33

SELECT COMPACT

General specification & technical information

CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the BS Kitemark, CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018.

GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.

COLOUR
All radiators are de-greased, phosphated and primer coated. An epoxy polyester finishing coat in white (RAL 9016) is applied to all front and rear surfaces.

ACCESSORIES
Touch up paint is available to order.

SYSTEM
2 pipe pumped indirect domestic and commercial heating applications.

CONNECTIONS
4 x ½" BSP. Please see below.

AIR VENTS
Air vent and plug packs are included in the packaging.

OPERATING PRESSURES
Tested to a pressure of 10.5 bar.
Working pressure of up to 8.0 bar.

OPERATING TEMPERATURE
Maximum 100°C.

DELIVERY
Stocked items: 2 - 5 working days.
Non-stocked items: 4 - 6 weeks.

VALVES
Please see page 219.

BIM
Visit our website to download the BIM components
www.myson.co.uk/bim

For more general information, please see page 256.

Weights & water contents per metre length

Type		Nominal Height (mm)													
		300		400		500		600		700		750		900	
		Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
11	SS	9.0	1.7	12.1	2.1	15.3	2.6	18.2	3.0	21.9	3.7	23.5	3.9	-	-
21	SX	14.7	3.4	19.5	4.3	24.5	5.2	29.2	6.2	-	-	35.3	7.8	-	-
22	SD	17.2	3.4	22.5	4.3	28.3	5.2	34.0	6.2	39.2	7.3	42.1	7.6	-	-
33	ST	24.9	5.1	-	-	41.7	8.3	50.1	9.8	-	-	69.6	11.5	94.7	16.6

n-Coefficients

Type		Nominal Height (mm)						
		300	400	500	600	700	750	900
11	SS	1.2981	1.3026	1.3070	1.3115	1.3133	1.3143	-
21	SX	1.2803	1.2940	1.3076	1.3213	-	1.3302	-
22	SD	1.3094	1.3182	1.3270	1.3358	1.3426	1.3460	-
33	ST	1.3140	-	1.3428	1.3486	-	1.3515	1.3600

Connection options

4 x ½" BSP

Mounting positions & dimensions

Nominal Height (mm)	A (mm)
300	250
400	350
500	450
600	550
700	650
750	700
900	850

Wall & floor brackets

Wall Brackets

Supplied with Type 11, 21, 22

Supplied with Type 33

Nominal Height (mm)	B (mm)
300	142
400	242
500	342
600	442
700	542
750	591
900	742

*Use dimension B+9 for 300mm high Type 33

Floor Brackets

Floor brackets for all types:

Radiator to wall distance: Any

Maximum load of a single bracket:
Vertically - 180kg
Pulling - 35kg

Order Code: RH033 (single piece)

Height 300 - 750mm	
Radiator length (mm)	Quantity of floor brackets*
400 - 1600	2
1800 - 2300	3
2400 - 2600	4
2700 - 3000	5

*The floor brackets will support the radiators, however, in certain instances the brackets will flex and where possible the radiator should be fixed to the wall using the top bracket.

NB: All measurements are nominal


Bracket positions & dimensions

Nominal Height (mm)	C (mm)
300	120
400	220
500	320
600	420
700	520
750	570
900	720

SELECT COMPACT

Heat outputs

Single Convector Type 11



Double Panel "Xtra" Type 21




Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code	
		Watts	Btu/h	Watts	Btu/h		
300mm	400	218	745	113	386	SS 30	40G
	600	328	1119	169	576	SS 30	60G
	800						
	1000	546	1863	281	958	SS 30	100G
	1200						
	1400	764	2607	393	1341	SS 30	140G
	1800	983	3354	506	1726	SS 30	180G
	2000	1092	3726	562	1917	SS 30	200G
	2400	1310	4470	674	2300	SS 30	240G
400mm	500	356	1215	183	625	SS 40	50G
	600	427	1457	220	749	SS 40	60G
	700	498	1699	256	874	SS 40	70G
	800	569	1941	292	998	SS 40	80G
	900	640	2184	329	1123	SS 40	90G
	1000	711	2426	365	1247	SS 40	100G
	1100	782	2668	402	1372	SS 40	110G
	1200	853	2910	438	1496	SS 40	120G
	1300	924	3153	475	1621	SS 40	130G
	1400	995	3395	512	1746	SS 40	140G
	1600	1138	3883	585	1996	SS 40	160G
	1800	1280	4367	658	2246	SS 40	180G
500mm	400	347	1184	178	608	SS 50	40G
	500	434	1481	223	761	SS 50	50G
	600	521	1778	268	914	SS 50	60G
	700	608	2074	312	1066	SS 50	70G
	800	694	2368	357	1217	SS 50	80G
	900	781	2665	401	1369	SS 50	90G
	1000	868	2962	446	1522	SS 50	100G
	1100	955	3258	491	1674	SS 50	110G
	1200	1042	3555	535	1827	SS 50	120G
	1300	1128	3849	580	1979	SS 50	130G
	1400	1215	4146	624	2130	SS 50	140G
	1500	1302	4442	669	2283	SS 50	150G
	1600	1389	4739	714	2435	SS 50	160G
	1800	1562	5330	803	2739	SS 50	180G
	2000	1736	5923	892	3044	SS 50	200G
	2300						
	2400	2083	7107	1070	3652	SS 50	240G
600mm	400	407	1389	208	711	SS 60	40G
	500	509	1737	261	890	SS 60	50G
	600	611	2085	313	1068	SS 60	60G
	700	713	2433	365	1246	SS 60	70G
	800	814	2777	417	1423	SS 60	80G
	900	916	3125	469	1601	SS 60	90G
	1000	1018	3473	521	1779	SS 60	100G
	1100	1120	3821	574	1957	SS 60	110G
	1200	1222	4169	626	2136	SS 60	120G
	1300	1323	4514	678	2312	SS 60	130G
	1400	1425	4862	730	2491	SS 60	140G
	1600	1629	5558	834	2847	SS 60	160G
	1800	1832	6251	938	3202	SS 60	180G
	2000	2036	6947	1043	3558	SS 60	200G
	2300						
	2400	2240	7643	1251	4270	SS 60	240G
700mm	300	348	1188	178	608	SS 70	30G
750mm	400	492	1679	251	857	SS 75	40G
	500	615	2098	314	1071	SS 75	50G
	600	738	2518	377	1286	SS 75	60G
	700	861	2938	440	1500	SS 75	70G
	800	984	3357	502	1714	SS 75	80G
	900	1107	3777	565	1928	SS 75	90G
	1000	1230	4197	628	2143	SS 75	100G
	1200	1476	5036	754	2571	SS 75	120G
	1400	1722	5875	879	3000	SS 75	140G
	1600	1968	6715	1005	3428	SS 75	160G
900mm	400						
	500						
	600						
	700						
	800						
	900						
	1000						
	1200						
	1400						

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
457	1558	238	811	SX 30 60G
761	2597	396	1351	SX 30 100G
1065	3635	554	1892	SX 30 140G
1370	4674	713	2432	SX 30 180G
482	1643	249	848	SX 40 50G
578	1971	298	1017	SX 40 60G
674	2300	348	1187	SX 40 70G
770	2629	398	1357	SX 40 80G
867	2957	447	1526	SX 40 90G
963	3286	497	1696	SX 40 100G
1059	3614	547	1865	SX 40 110G
1156	3943	596	2035	SX 40 120G
1252	4271	646	2204	SX 40 130G
1348	4600	696	2374	SX 40 140G
1541	5257	795	2713	SX 40 160G
1733	5914	895	3052	SX 40 180G
462	1578	237	808	SX 50 40G
578	1972	296	1010	SX 50 50G
694	2367	355	1212	SX 50 60G
809	2761	414	1414	SX 50 70G
925	3155	474	1616	SX 50 80G
1040	3550	533	1818	SX 50 90G
1156	3944	592	2020	SX 50 100G
1387	4733	710	2424	SX 50 120G
1618	5522	829	2828	SX 50 140G
1850	6311	947	3232	SX 50 160G
2081	7100	1066	3636	SX 50 180G
536	1829	273	932	SX 60 40G
670	2286	342	1165	SX 60 50G
804	2743	410	1398	SX 60 60G
938	3200	478	1631	SX 60 70G
1072	3658	546	1864	SX 60 80G
1206	4115	615	2097	SX 60 90G
1340	4572	683	2330	SX 60 100G
1474	5029	751	2563	SX 60 110G
1608	5486	820	2796	SX 60 120G
1742	5944	888	3030	SX 60 130G
1876	6401	956	3263	SX 60 140G
2144	7315	1093	3729	SX 60 160G
2412	8230	1229	4195	SX 60 180G
642	2192	326	1111	SX 75 40G
803	2740	407	1389	SX 75 50G
964	3288	488	1666	SX 75 60G
1124	3836	570	1944	SX 75 70G
1285	4384	651	2222	SX 75 80G
1445	4932	733	2500	SX 75 90G
1606	5480	814	2777	SX 75 100G
1927	6576	977	3333	SX 75 120G
2248	7672	1140	3888	SX 75 140G
2570	8767	1302	4444	SX 75 160G

Double Convector Type 22

[illegible]

Triple Convector Type 33



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
808	2758	413	1408	ST 30 60G*
1347	4596	688	2347	ST 30 100G
1616	5515	826	2817	ST 30 120G
1886	6434	963	3286	ST 30 140G
2425	8273	1238	4225	ST 30 180G
2694	9192	1376	4695	ST 30 200G
1221	4166	617	2105	ST 50 60G*
1425	4860	720	2455	ST 50 70G*
1628	5555	822	2806	ST 50 80G
1832	6249	925	3157	ST 50 90G*
2035	6943	1028	3508	ST 50 100G
2239	7638	1131	3858	ST 50 110G*
2442	8332	1234	4209	ST 50 120G
2849	9721	1439	4911	ST 50 140G
3256	11109	1645	5612	ST 50 160G*
3663	12498	1850	6314	ST 50 180G
4070	13887	2056	7015	ST 50 200G
4681	15970	2364	8067	ST 50 230G*
942	3215	473	1615	ST 60 40G
1178	4019	592	2018	ST 60 50G*
1414	4823	710	2422	ST 60 60G
1649	5627	828	2825	ST 60 70G*
1885	6431	946	3229	ST 60 80G
2120	7235	1065	3633	ST 60 90G
2356	8039	1183	4036	ST 60 100G
2592	8843	1301	4440	ST 60 110G*
2827	9646	1420	4844	ST 60 120G
3298	11254	1656	5651	ST 60 140G
3770	12862	1893	6458	ST 60 160G
4241	14470	2129	7266	ST 60 180G
4712	16077	2366	8073	ST 60 200G
5311	18120	2675	9127	ST 60 230G
1101	3757	552	1885	ST 75 40G*
1377	4697	691	2356	ST 75 50G*
1652	5636	829	2827	ST 75 60G*
1927	6575	967	3298	ST 75 70G
2202	7515	1105	3770	ST 75 80G*
2478	8454	1243	4241	ST 75 90G*
2753	9393	1381	4712	ST 75 100G
3304	11272	1657	5654	ST 75 120G
3854	13151	1933	6597	ST 75 140G
1304	4449	651	2221	ST 90 40G*
1630	5562	814	2777	ST 90 50G*
1956	6674	977	3334	ST 90 60G*
2282	7786	1140	3890	ST 90 70G*
2608	8898	1302	4442	ST 90 80G*
2934	10011	1465	4999	ST 90 90G*
3260	11123	1628	5555	ST 90 100G
3912	13348	1954	6667	ST 90 120G
4564	15572	2279	7776	ST 90 140G

*Non-stock - made to order only.



The VERTICAL is the ultimate space saving solution, with a traditional front panel available in a choice of four types, two heights and four lengths.

- The VERTICAL is suitable for narrow and tall wall spaces
- The VERTICAL type 10 comes without side panels



TYPE 10 & 22


VERTICAL

VERTICAL

General specification & technical information

CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018.

GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.

COLOUR
All radiators are de-greased, phosphated and primer coated. An epoxy polyester finishing coat in white (RAL 9016) is applied to all front and rear surfaces.

ACCESSORIES
Touch up paint available on request.

SYSTEM
2 pipe pumped indirect domestic and commercial heating applications.

CONNECTIONS
6 x 1/2" BSP.

AIR VENTS
Air vent and plug packs are included in the packaging.

OPERATING PRESSURES
Tested to a pressure of 8 bar.
Working pressure of up to 6 bar.

OPERATING TEMPERATURE
Maximum 100°C.

DELIVERY
2 - 5 working days.

VALVES
Please see page 38.

For more general information, please see page 256.

Weights & water contents per metre length


Type	Nominal Height (mm)			
	1800		1950	
	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
10	37.47	10.13	38.67	11.07
20	71.33	21.83	77.07	23.78
21	83.07	21.47	91.33	24.13
22	93.87	21.60	102.33	23.13

n-Coefficients


Type	Nominal Height (mm)	
	1800	1950
10	1.3246	1.3381
20	1.3094	1.3135
21	1.3384	1.3422
22	1.3566	1.3619

Connection options

6 x 1/2" BSP (15/21)

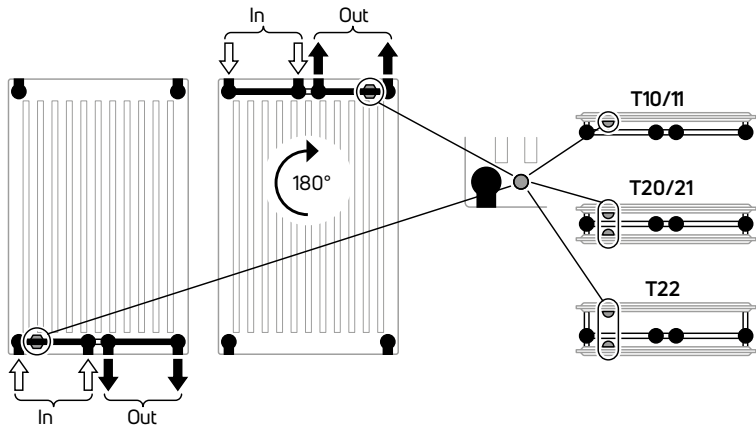


Mounting positions & dimensions

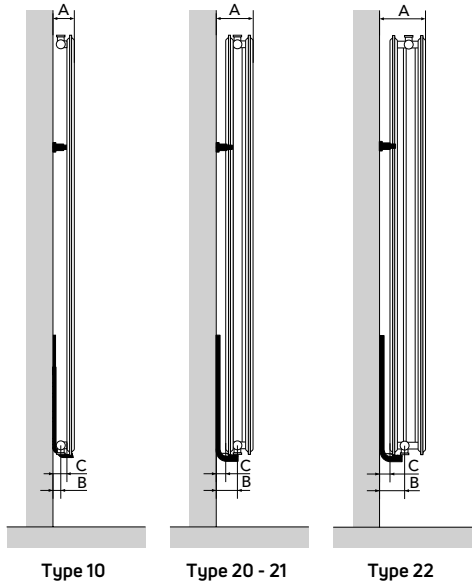


	Type			Length (mm)	D (mm)
	10	20-21	22		
A (mm)	80	106	131	300	244
B (mm)	43	65	65	450	394
C (mm)	65	25	25	600	544
				750	694

Top View

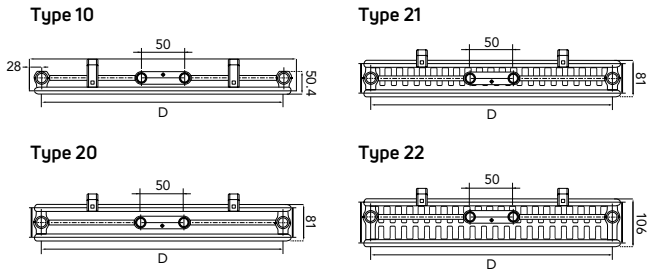


Bracket positions & dimensions

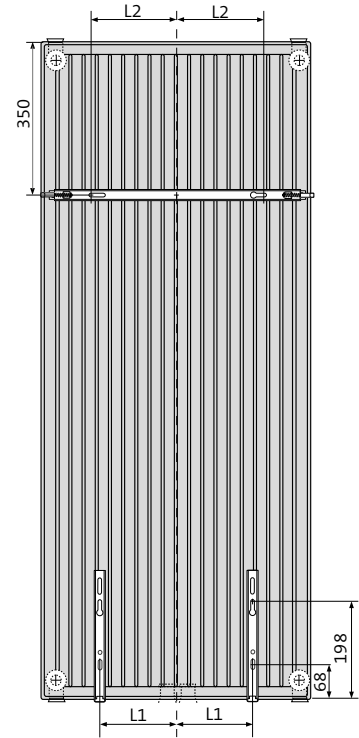

Length (mm)	L1 (mm)	L2 (mm)
	(mm)	(mm)
300	60	75
450	135	125
600	210	200
750	285	250

Brackets

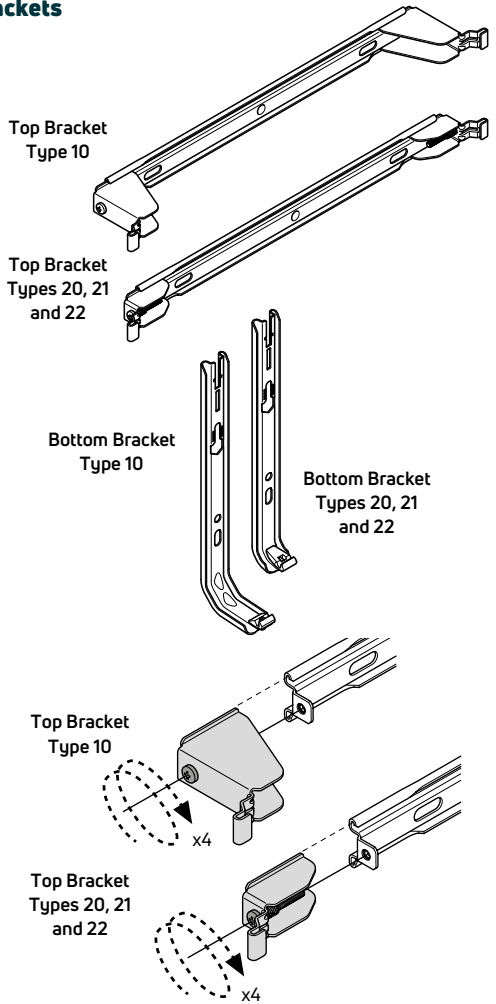

NB: All measurements are nominal.


VERTICAL

Heat outputs

Type 10




Type 20




Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
1800mm	300					
	450	765	2611	389	1328	V 180 SP 45
	600	1020	3481	518	1768	V 180 SP 60
	750	1275	4352	648	2211	V 180 SP 75
1950mm	300					
	450	819	2795	413	1410	V 195 SP 45
	600	1092	3727	551	1881	V 195 SP 60
	750	1365	4659	689	2351	V 195 SP 75

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
819	2795	420	1433	V 180 DP 30
1229	4193	629	2146	V 180 DP 45
1638	5590	839	2862	V 180 DP 60
2048	6988	1049	3579	V 180 DP 75
877	2993	448	1529	V 195 DP 30
1315	4488	672	2293	V 195 DP 45
1753	5984	896	3058	V 195 DP 60
2192	7480	1120	3822	V 195 DP 75

Type 21



Type 22



Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
1800mm	300	963	3287	486	1659	V 180 DPX 30
	450	1445	4930	729	2488	V 180 DPX 45
	600	1926	6573	972	3317	V 180 DPX 60
	750	2408	8217	1215	4146	V 180 DPX 75
1950mm	300	1020	3481	514	1754	V 195 DPX 30
	450	1530	5222	771	2631	V 195 DPX 45
	600	2040	6963	1028	3508	V 195 DPX 60
	750	2550	8703	1285	4385	V 195 DPX 75

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
1132	3864	566	1931	V 180 DC 30
1698	5796	849	2896	V 180 DC 45
2264	7728	1132	3862	V 180 DC 60
2831	9660	1415	4827	V 180 DC 75
1192	4068	594	2027	V 195 DC 30
1788	6102	892	3044	V 195 DC 45
2384	8136	1189	4057	V 195 DC 60
2980	10170	1486	5071	V 195 DC 75

Accessories



TOWEL BAR

Product	Finish	Order Code
VALVE SETS (Includes a nut & olive pack)		
Two-pipe Valve Set (Straight)*	White	VSWHST
Two-pipe Valve Set (Straight)*	Chrome	VSCHST
Two-pipe Valve Set (Angle)*	White	VSWHAN
Two-pipe Valve Set (Angle)*	Chrome	VSCHAN
TOWEL BARS		
300mm	White	VERTBAR300
450mm	White	VERTBAR450
600mm	White	VERTBAR600
750mm	White	VERTBAR750



VSWHST



VSCHST



VSWHAN



VSCHAN


*Not to be used for top connection.





The MYSON LST is the UK's most comprehensive and popular range of LST radiators, with both horizontal and vertical options available. The range is compliant with NHS Estates Guidance Notes 1998 and comes with anti-bacterial paint, making it ideal for hospital and care home applications. The LST range is also suitable for schools, student accommodation and other social housing projects as the surface temperature remains below 43°C and comes with safety conscious round steel casing, which eliminates sharp edges and ensures pipe work is concealed.

- The MYSON LST is available in 98 sizes
- It is available in three types, Super, Super Extra and Super Plus
- There are six different heights ranging from 572mm to 2072mm
- We offer lengths from 420mm, which is the slimmest panel LST radiator on the market today, through to 2200mm, the widest panel LST radiator

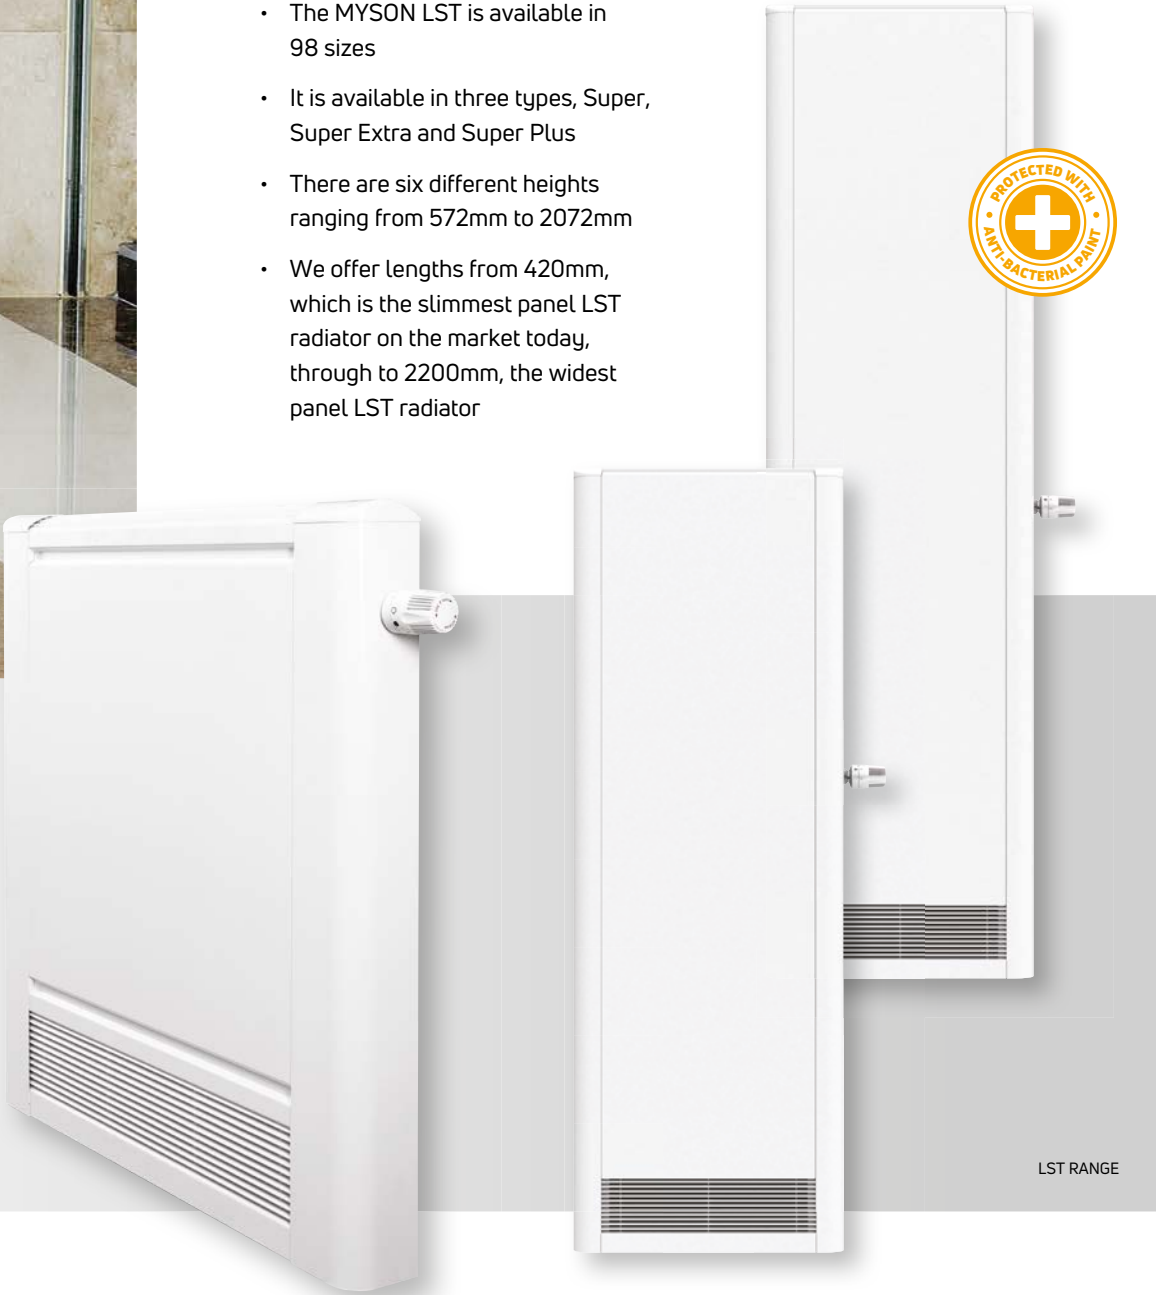

LST RANGE



LST RANGE

(LOW SURFACE TEMPERATURE)

LST

General specification & technical information

CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018.

GUARANTEE
10 year guarantee from date of purchase against manufacturing defects for both the radiator and the casing.

COLOUR
All radiators are de-greased, phosphated and primer coated. An epoxy polyester finishing coat in white (RAL 9016) is applied to all front and rear surfaces.

ANTI-BACTERIAL PAINT
Coating to suppress bacterial growth.

ACCESSORIES
Touch up paint available on request.

SYSTEM
2 pipe pumped indirect domestic and commercial heating applications.

CONNECTIONS
4 x ½" BSP. Please refer to control options on page 45.

AIR VENTS
Air vent and plug packs are included in the packaging.

OPERATING PRESSURES
Tested to a pressure of 10.5 bar.
Working pressure of up to 8.0 bar.

OPERATING TEMPERATURE
Surface temperature below 43°C.
Water inlet temperature up to 82°C.

DELIVERY
2 - 5 working days.

VALVES
Please see page 45.

BIM
Visit our website to download the BIM components www.myson.co.uk/bim

For more general information, please see page 256.

Weights & water contents per radiator - LST SUPER

Nominal Length (mm)	Nominal Height (mm)							
	572		672		872		972	
	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
420	-	-	7.43	0.63	10.15	0.90	11.36	1.05
600	-	-	11.02	0.84	15.32	1.20	17.22	1.40
800	12.10	1.02	14.90	1.26	20.90	1.80	23.53	2.10
1000	15.22	1.36	18.80	1.68	26.50	2.40	29.88	2.80
1200	18.45	1.70	22.69	2.10	32.09	3.00	36.21	3.50
1400	21.63	2.04	26.62	2.52	37.73	3.60	42.57	4.20
1600	24.80	2.38	30.56	2.94	43.37	4.20	48.94	4.90
1800	27.94	2.72	34.53	3.36	49.04	4.80	55.34	5.60
2000	31.07	3.06	38.40	3.78	54.62	5.40	61.74	6.30
2200	-	-	42.27	4.20	60.20	6.00	-	-

Weights & water contents per radiator - LST SUPER EXTRA

Nominal Length (mm)	Nominal Height (mm)			
	672		872	
	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
600	14.63	1.72	20.39	2.48
800	19.96	2.58	28.51	3.72
1000	25.30	3.44	35.96	4.96
1200	30.84	4.30	43.88	6.20
1400	36.27	5.16	51.46	7.44
1600	41.74	6.02	60.07	8.68
1800	47.03	6.88	67.42	9.92
2000	53.19	7.74	75.03	11.16
2200	58.38	8.60	83.21	12.40

Weights & water contents per radiator - LST SUPER PLUS

Nominal Length (mm)	Nominal Height (mm)							
	572		672		872		972	
	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
420	-	-	10.61	1.29	14.78	1.86	16.62	2.10
600	-	-	16.28	1.72	23.04	2.48	26.07	2.80
800	17.92	2.04	22.36	2.58	31.88	3.72	36.18	4.20
1000	22.70	2.72	28.44	3.44	40.72	4.96	46.32	5.60
1200	27.50	3.40	34.52	4.30	49.59	6.20	56.45	7.00
1400	32.31	4.08	40.61	5.16	58.44	7.44	66.57	8.40
1600	37.12	4.76	46.74	6.02	67.33	8.68	76.73	9.80
1800	41.80	5.44	52.88	6.88	76.24	9.92	86.91	11.20
2000	46.74	6.12	58.94	7.74	85.06	11.16	97.09	12.60
2200	-	-	65.00	8.60	93.88	12.40	-	-

n-Coefficients

Type		Nominal Height (mm)			
		572	672	872	972
11	LS	1.3047	1.3027	1.3093	1.3178
21	LSX	-	1.2808	1.2640	-
22	LSP	1.3121	1.3229	1.3444	1.3528

Mounting positions & dimensions

Enclosure Height A (mm)	Emitter Height B (mm)
572	300
672	400
872	600
972	700

Important: It is advisable to leave a further 5mm clearance above any final floor covering to allow for easy fitting and removal.


NB: All measurements are nominal.

LST

Heat outputs

PANEL RADIATORS

LST SUPER - Nominal Depth 107mm



Nominal Height	Outer Casing Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
572mm	800	277	946	139	475	5 LS 080
	1000	370	1261	186	634	5 LS 100
	1200	462	1576	232	792	5 LS 120
	1400	554	1890	278	949	5 LS 140
	1600	647	2207	325	1109	5 LS 160
	1800	739	2521	371	1266	5 LS 180
	2000	832	2837	418	1426	5 LS 200
672mm	420	182	621	92	314	6 LS 042
	600	243	830	123	418	6 LS 060
	800	365	1245	184	627	6 LS 080
	1000	486	1660	245	836	6 LS 100
	1200	608	2074	306	1045	6 LS 120
	1400	730	2489	368	1254	6 LS 140
	1600	851	2904	429	1463	6 LS 160
	1800	973	3319	490	1672	6 LS 180
	2000	1094	3734	551	1881	6 LS 200
	2200	1216	4149	612	2088	6 LS 220
872mm	420	265	904	134	457	8 LS 042
	600	353	1205	179	610	8 LS 060
	800	530	1808	268	915	8 LS 080
	1000	706	2410	358	1221	8 LS 100
	1200	883	3013	447	1526	8 LS 120
	1400	1060	3615	537	1831	8 LS 140
	1600	1236	4218	626	2136	8 LS 160
	1800	1413	4820	716	2441	8 LS 180
	2000	1589	5423	805	2746	8 LS 200
	2200	1766	6026	894	3050	8 LS 220
972mm	420	304	1037	155	529	9 LS 042
	600	405	1383	206	702	9 LS 060
	800	608	2074	309	1053	9 LS 080
	1000	810	2765	412	1404	9 LS 100
	1200	1013	3456	514	1755	9 LS 120
	1400	1216	4148	617	2106	9 LS 140
	1600	1418	4839	720	2457	9 LS 160
	1800	1621	5530	823	2808	9 LS 180
	2000	1823	6220	925	3156	9 LS 200

LST SUPER PLUS - Nominal Depth 157mm



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
545	1861	276	942	5 LSP 080
727	2481	368	1256	5 LSP 100
909	3102	460	1571	5 LSP 120
1091	3722	552	1883	5 LSP 140
1273	4342	644	2199	5 LSP 160
1454	4961	736	2511	5 LSP 180
1636	5583	829	2827	5 LSP 200
351	1198	179	611	6 LSP 042
468	1597	238	811	6 LSP 060
702	2395	357	1217	6 LSP 080
936	3194	475	1622	6 LSP 100
1170	3992	594	2028	6 LSP 120
1404	4790	713	2433	6 LSP 140
1638	5589	832	2839	6 LSP 160
1872	6387	951	3244	6 LSP 180
2106	7186	1070	3650	6 LSP 200
2340	7984	1188	4053	6 LSP 220
494	1686	253	863	8 LSP 042
659	2249	337	1150	8 LSP 060
989	3374	505	1724	8 LSP 080
1318	4498	674	2299	8 LSP 100
1648	5623	842	2874	8 LSP 120
1978	6748	1011	3449	8 LSP 140
2307	7872	1179	4023	8 LSP 160
2637	8997	1348	4598	8 LSP 180
2966	10121	1516	5173	8 LSP 200
3296	11245	1684	5746	8 LSP 220
560	1911	287	979	9 LSP 042
747	2548	383	1306	9 LSP 060
1120	3822	574	1959	9 LSP 080
1494	5096	766	2613	9 LSP 100
1867	6370	957	3266	9 LSP 120
2240	7644	1149	3919	9 LSP 140
2614	8918	1340	4572	9 LSP 160
2987	10192	1531	5225	9 LSP 180
3361	11468	1723	5879	9 LSP 200

LST SUPER EXTRA - Nominal Depth 127 mm



Nominal Height	Outer Casing Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
672mm	600	355	1211	184	629	6 LSX 060
	800	532	1815	277	944	6 LSX 080
	1000	710	2423	369	1258	6 LSX 100
	1200	887	3026	461	1573	6 LSX 120
	1400	1064	3630	553	1888	6 LSX 140
	1600	1242	4238	645	2202	6 LSX 160
	1800	1419	4842	738	2517	6 LSX 180
872mm	2000	1597	5449	830	2831	6 LSX 200
	2200	1774	6053	922	3146	6 LSX 220
	600	483	1648	253	864	8 LSX 060
	800	725	2474	380	1296	8 LSX 080
	1000	966	3296	506	1728	8 LSX 100
	1200	1208	4122	633	2160	8 LSX 120
	1400	1450	4947	760	2592	8 LSX 140
	1600	1691	5770	886	3024	8 LSX 160
	1800	1933	6595	1013	3456	8 LSX 180
	2000	2174	7418	1139	3888	8 LSX 200
	2200	2416	8243	1266	4320	8 LSX 220

LST


Valves & controls

MYSON offer a range of thermostatic valves designed to maximise the effectiveness of our range of Low Surface Temperature radiators. Three designs are available, the Universal Close Coupled and the Close Coupled Kit which

allows the case to be removed for cleaning without removing the TRV head, and the competitively priced Direct Fit Kit.

Direct fit TRV kit


Available for all LST's **except Vertical and 420mm wide**. Suitable for TBOE connection only. This kit allows a MYSON TRV to be mounted directly onto the internal radiator, making it an integral part of the LST radiator. This option utilises the 38mm knock out in the LST casing.

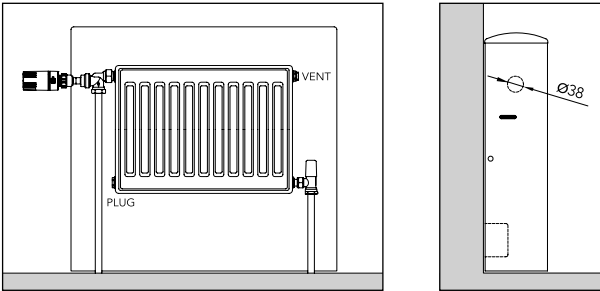

- Direct Fit TRV Kit comprises:**
- 1 x Horizontal angle TRV body
 - 1 x TRV head
 - 1 x Extension adaptor
 - 1 x Plastic bush
 - 1 x MATCHMASTER lockshield valve
- Order Code:** LSTDIRECTKITUK

Close coupled TRV kit


Available for all LST's **except Vertical and 420mm wide**. Suitable for TBOE, TBSE or BOE connections. This kit allows the MYSON TRV to be mounted directly onto the LST casing, with a choice of positions for both the TRV head and TRV angled valve body. This option utilises the 23mm knock out on the LST casing.

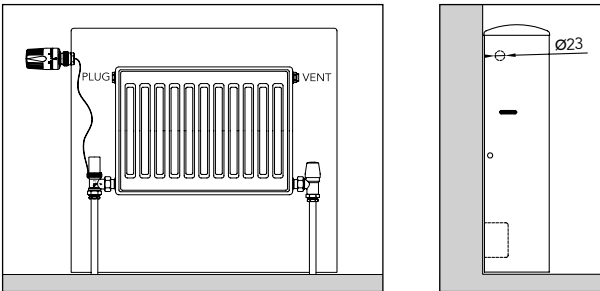

- Close Coupled TRV Kit comprises:**
- 1 x TRV head*
 - 1 x TRV angled body*
 - 1 x LST capillary unit/actuator/sensor head adaptor
 - 1 x MATCHMASTER angled lockshield valve
 - 1 x Locking tool
- Order Code:** LSTCCKITUK

Universal close coupled TRV kit

Available for all LST's. Suitable for TBOE, TBSE or BOE connections. This kit allows the MYSON TRV to be mounted directly onto the LST casing, with a choice of positions for both the TRV head and TRV straight valve body. This option utilises the 23mm knock out on the LST casing.

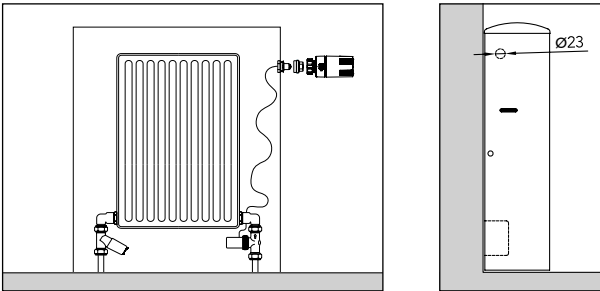

- Universal Close Coupled TRV Kit Comprises:**
- 1 x TRV head*
 - 1 x TRV straight body*
 - 1 x LST capillary unit/actuator/sensor head adaptor
 - 1 x MATCHMASTER straight lockshield valve
 - 2 x Integration elbows
- Order Code:** LSTUNIKITUK

PANEL RADIATORS

LST VERTICAL

General specification & technical information

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects for both the radiator and the casing.
- COLOUR**
All radiators are de-greased, phosphated and primer coated. An epoxy polyester finishing coat in white (RAL 9016) is applied to all front and rear surfaces.
- ANTI-BACTERIAL PAINT**
Coating to suppress bacterial growth.
- ACCESSORIES**
Touch up paint available on request.
- SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.
- CONNECTIONS**
4 x ½" BSP. Please refer to control option on page 47.
- AIR VENTS**
Air vent and plug packs are included in the packaging.
- OPERATING PRESSURES**
Tested to a pressure of 8 bar.
Working pressure of up to 6.0 bar.
- OPERATING TEMPERATURE**
Surface temperature below 43°C.
Water inlet temperature up to 82°C.
- DELIVERY**
2 - 5 working days.
- VALVES**
Please see page 47.
- BIM**
Visit our website to download the BIM components www.myson.co.uk/bim

For more general information, please see page 256.

Weights & water contents per radiator - LST VERTICAL


Nominal Length (mm)	Nominal Height (mm)			
	1772		2072	
	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
420	55.26	5.90	61.08	6.48
570	69.89	8.85	77.14	9.72
720	84.78	11.80	90.50	12.96
870	99.25	14.75	105.87	16.20

n-Coefficients

Type		Nominal Height (mm)	
		1772	2072
22	LSP	1.3581	1.3452

Heat outputs


LST VERTICAL - Nominal Depth 157mm



Nominal Height	Outer Casing Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
1772mm	420	811	2768	405	1383	17 LSP 042
	570	1217	4152	608	2074	17 LSP 057
	720	1623	5537	811	2766	17 LSP 072
	870	2028	6921	1013	3457	17 LSP 087
2072mm	420	895	3054	450	1535	20 LSP 042
	570	1342	4579	675	2303	20 LSP 057
	720	1789	6104	900	3071	20 LSP 072
	870	2237	7633	1125	3839	20 LSP 087

Bracket positions & dimensions

Casing Width - A	420	570	720	870
Radiator Width - B	300	450	600	750
Centre Connections - C	50	50	50	50
Left-Right Connections - D	244	394	544	694

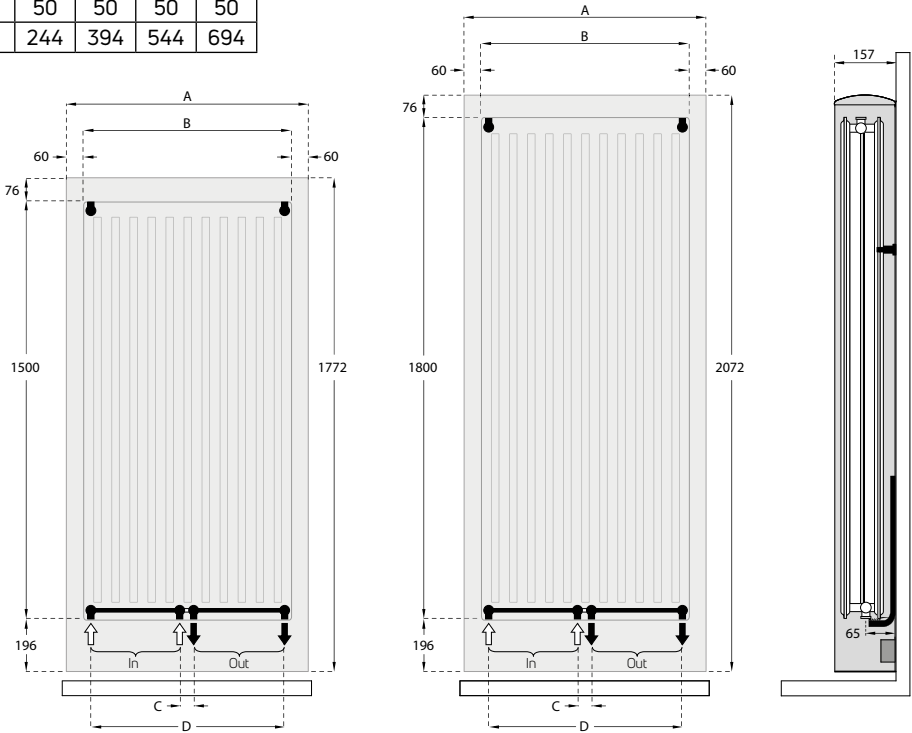


NB: All measurements are nominal.

Universal Close Coupled TRV Kit (supplied separate)


LST Vertical radiators can only be fitted with the Universal Close Coupled TRV Kit:
Note: Please discard the 2 integration elbows from the Close Coupled Kit and use the straight valve tails (supplied with the Vertical LST).

Please refer to the Universal Close Coupled TRV Kit instructions for more information.
The radiator has 6 connections. Please ensure you use the plug and vents (supplied with Vertical LST) in the unused connections.

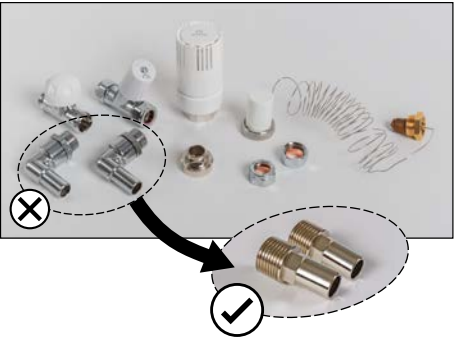

- Universal Close Coupled TRV Kit comprises:
- 1 x TRV head**
 - 1 x TRV straight body**
 - 1 x LST capillary unit/actuator/sensor head adaptor
 - 1 x MATCHMASTER straight lockshield valve
 - 2 x Integration elbows

Order Code: LSTUNIKITUK

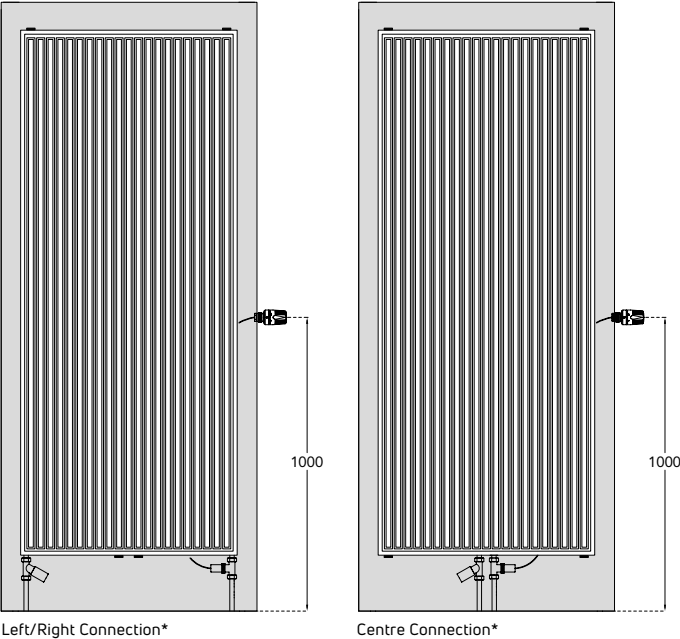

*Flow = left and Return = right for both connection options, please refer to the diagrams above.
**15mm compression copper only - for ½" iron pipe, an additional female adaptor is required.



Premium Panel radiators

The MYSON radiator range extends beyond the traditional steel panel radiator. Our Premium Panel range includes stylish contemporary radiators in the PLAN and PLAN PLUS ranges - in both horizontal and vertical models. The T6 COMPACT and T6 PLAN both come with a pioneering central connection, allowing for easy installation and the ULOW-E2 brings an innovative heating approach, with fan assisted, intelligent low-temperature heating.



The PLAN range offers a contemporary alternative to the traditional panel radiator. Achieving a radiator range that has a minimalist feel, combining good looks with leading performance.

The sleek flat front panel design of the PLAN offers a contemporary alternative to the traditional panel radiator. Whilst maintaining all of the benefits, the PLAN PLUS model takes this modern styling one step further with a decorative, rather than flat, front panel. Both models feature side panels and top grille.

The PLAN Vertical and PLAN PLUS Vertical both feature the same front panel design as the PLAN & PLAN PLUS, however, have the addition of curved rather than straight side panels.

- Available in 5 heights and 14 lengths, ranging from 400mm to 3000mm, the PLAN range comes in over 136 stocked sizes, while the PLUS range is offered in 94 stocked sizes
- Both models feature Type 11, Type 21 and Type 22 profiles, with the PLAN additionally available as a Type 33 profile (vertical models are only available in Type 21 & 22)



PLAN, PLAN PLUS & VERTICAL

PLAN & PLAN PLUS

General specification & technical information

CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.

GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.

COLOUR
All radiators are de-greased, phosphated and primer coated. An epoxy polyester finishing coat in white (RAL 9016) is applied to all front and rear surfaces.

ACCESSORIES
Touch up paint available on request.

SYSTEM
2 pipe pumped indirect domestic and commercial heating applications.

CONNECTIONS
4 x 1/2" BSP. Please see below.

AIR VENTS
Air vent and plug packs are included in the packaging.

OPERATING PRESSURES
Tested to a pressure of 10.5 bar - 13 bar.
Working pressure of up to 8 bar - 10 bar.

OPERATING TEMPERATURE
Maximum 100°C.

DELIVERY
2 - 5 working days.

VALVES
Please see page 219.

BIM
Visit our website to download the BIM components www.myson.co.uk/bim

For more general information, please see page 256.

Weights & water contents per metre length

Type	Nominal Height (mm)							
	300		400		500		600	
	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
11	11.70	1.50	16.10	2.20	20.50	2.90	24.80	3.40
21	-	-	-	-	23.70*	5.20*	33.70	6.10
22	19.10	3.20	25.10	4.20	31.50	5.20	38.00	6.10
33*	26.90	5.10	36.70	6.30	42.20	7.50	56.40	8.80

*PLAN only.


n-Coefficients

Type	Nominal Height (mm)			
	300	400	500	600
11	1.2820	1.2824	1.2827	1.2831
21	-	-	1.2907*	1.2967
22	1.3000	1.3098	1.3197	1.3295
33*	1.3159	1.3245	1.3331	1.3417

*PLAN only.


Connection options
4 x 1/2" BSP

Mounting positions & dimensions

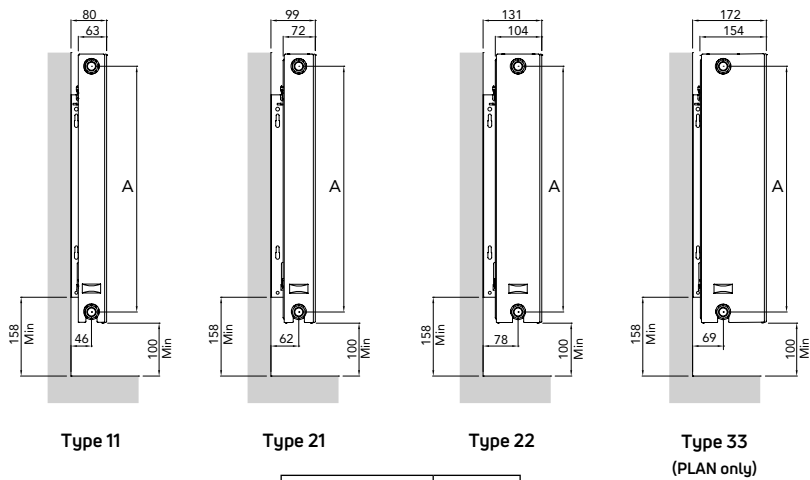


Nominal Height (mm)	A (mm)
300	250
400	350
500	450
600	550

Top View

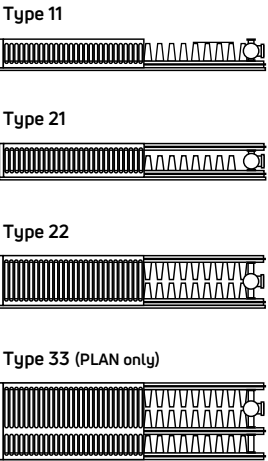


Bracket positions & dimensions

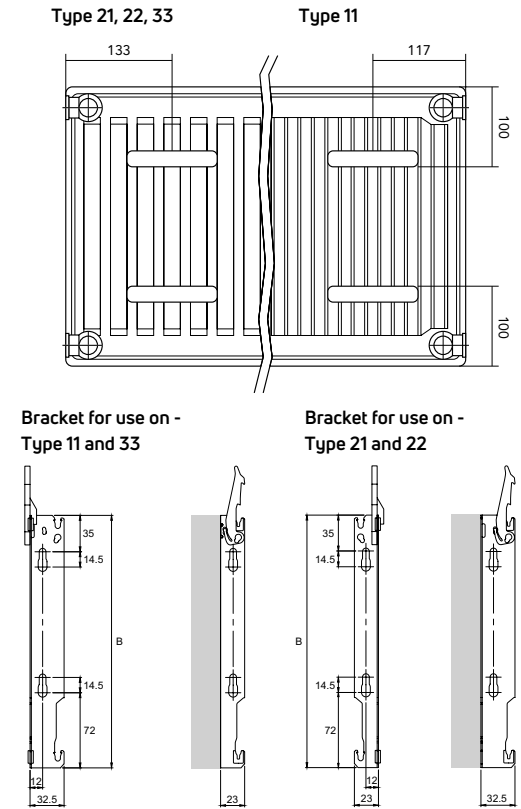

Nominal Height (mm)	B (mm)
300	151
400	241
500	341
600	441

Floor brackets



Floor brackets for all types:
Radiator to wall distance: Any
Maximum load of a single bracket:
Vertically - 180kg
Pulling - 35kg
Order Code: RH033 (single piece)

Height 300 - 700mm	
Radiator length (mm)	Quantity of floor brackets*
400 - 1600	2
1800 - 2300	3
2400 - 2600	4
2700 - 3000	5

*The floor brackets will support the radiators, however, in certain instances the brackets will flex and where possible the radiator should be fixed to the wall using the top bracket.

NB: All measurements are nominal.

PLAN

Heat outputs

Type 11						
Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
300mm	600	317	1082	165	563	30 PS 60G
	1000	529	1805	275	938	30 PS 100G
	1400	741	2528	385	1314	30 PS 140G
	2000	1058	3610	550	1877	30 PS 200G
400mm	400	272	928	141	481	40 PS 40G
	600	408	1392	212	723	40 PS 60G
	800	544	1856	283	966	40 PS 80G
	1000	680	2320	353	1204	40 PS 100G
	1200	816	2784	424	1447	40 PS 120G
	1400	952	3248	494	1686	40 PS 140G
	1600	1088	3712	565	1928	40 PS 160G
	1800	1224	4176	636	2170	40 PS 180G
	2000	1360	4640	706	2409	40 PS 200G
500mm	400	329	1123	171	583	50 PS 40G
	600	494	1686	256	873	50 PS 60G
	800	658	2245	342	1167	50 PS 80G
	1000	823	2808	427	1457	50 PS 100G
	1200	988	3371	513	1750	50 PS 120G
	1400	1152	3931	598	2040	50 PS 140G
	1600	1317	4494	684	2334	50 PS 160G
	1800	1481	5053	769	2624	50 PS 180G
	2000	1646	5616	855	2917	50 PS 200G
600mm	400	384	1310	200	682	60 PS 40G
	600	577	1969	299	1020	60 PS 60G
	800	769	2624	399	1361	60 PS 80G
	1000	961	3279	499	1703	60 PS 100G
	1200	1153	3934	599	2044	60 PS 120G
	1400	1345	4589	699	2385	60 PS 140G
	1600	1538	5248	798	2723	60 PS 160G
	1800	1730	5903	898	3064	60 PS 180G
	2000	1922	6558	998	3405	60 PS 200G
	2300	2210	7541	1148	3917	60 PS 230G
	2600	2499	8527	1297	4425	60 PS 260G
	3000	2883	9837	1497	5108	60 PS 300G

Type 22						
Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
300mm	600	562	1918	289	986	30 PD 60G
	1000	937	3197	483	1648	30 PD 100G
	1400	1312	4477	675	2303	30 PD 140G
	2000	1874	6394	965	3293	30 PD 200G
400mm	400	479	1634	245	836	40 PD 40G
	600	719	2453	368	1256	40 PD 60G
	800	958	3269	491	1675	40 PD 80G
	1000	1198	4088	614	2095	40 PD 100G
	1200	1438	4906	736	2511	40 PD 120G
	1400	1677	5722	859	2931	40 PD 140G
	1600	1917	6541	982	3351	40 PD 160G
	1800	2156	7356	1104	3767	40 PD 180G
	2000	2396	8175	1227	4187	40 PD 200G
500mm	400	578	1972	294	1003	50 PD 40G
	600	866	2955	442	1508	50 PD 60G
	800	1155	3941	589	2010	50 PD 80G
	1000	1444	4927	736	2511	50 PD 100G
	1200	1733	5913	883	3013	50 PD 120G
	1400	2022	6899	1030	3514	50 PD 140G
	1600	2310	7882	1177	4016	50 PD 160G
	1800	2599	8868	1325	4521	50 PD 180G
	2000	2888	9854	1472	5022	50 PD 200G
600mm	400	670	2286	340	1160	60 PD 40G
	600	1006	3432	510	1740	60 PD 60G
	800	1341	4575	680	2320	60 PD 80G
	1000	1676	5719	850	2900	60 PD 100G
	1200	2011	6862	1020	3480	60 PD 120G
	1400	2346	8005	1190	4060	60 PD 140G
	1600	2682	9151	1360	4640	60 PD 160G
	1800	3017	10294	1530	5220	60 PD 180G
	2000	3352	11437	1700	5800	60 PD 200G
	2300	3855	13153	1955	6670	60 PD 230G
	2600	4358	14869	2210	7541	60 PD 260G
	3000	5028	17156	2549	8697	60 PD 300G

Type 21

[illegible]

Type 33

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
788	2689	403	1375	30 PT 60G
1314	4483	671	2289	30 PT 100G
1840	6278	939	3204	30 PT 140G
2628	8967	1342	4579	30 PT 200G
666	2272	339	1157	40 PT 40G
1000	3412	508	1733	40 PT 60G
1333	4548	678	2313	40 PT 80G
1666	5684	847	2890	40 PT 100G
1999	6821	1016	3467	40 PT 120G
2332	7957	1186	4047	40 PT 140G
2666	9096	1355	4623	40 PT 160G
2999	10233	1524	5200	40 PT 180G
3332	11369	1694	5780	40 PT 200G
798	2723	404	1378	50 PT 40G
1198	4088	606	2068	50 PT 60G
1597	5449	808	2757	50 PT 80G
1996	6810	1010	3446	50 PT 100G
2395	8172	1212	4135	50 PT 120G
2794	9533	1414	4825	50 PT 140G
3194	10898	1616	5514	50 PT 160G
3593	12259	1818	6203	50 PT 180G
3992	13621	2020	6892	50 PT 200G
923	3149	465	1587	60 PT 40G
1384	4722	698	2382	60 PT 60G
1846	6299	930	3173	60 PT 80G
2307	7871	1163	3968	60 PT 100G
2768	9444	1395	4760	60 PT 120G
3230	11021	1628	5555	60 PT 140G
3691	12594	1860	6346	60 PT 160G
4153	14170	2093	7141	60 PT 180G
4614	15743	2325	7933	60 PT 200G
5306	18104	2674	9124	60 PT 230G
5998	20465	3023	10314	60 PT 260G
6921	23614	3488	11901	60 PT 300G

Type 11

Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
300mm	600	317	1082	165	563	30 PPS 60G
	1000	529	1805	275	938	30 PPS 100G
	1400	741	2528	385	1314	30 PPS 140G
	2000	1058	3610	550	1877	30 PPS 200G
400mm	400	272	928	141	481	40 PPS 40G
	600	408	1392	212	723	40 PPS 60G
	800	544	1856	283	966	40 PPS 80G
	1000	680	2320	353	1204	40 PPS 100G
	1200	816	2784	424	1447	40 PPS 120G
	1400	952	3248	494	1686	40 PPS 140G
	1600	1088	3712	565	1928	40 PPS 160G
	1800	1224	4176	636	2170	40 PPS 180G
	2000	1360	4640	706	2409	40 PPS 200G
500mm	400	329	1123	171	583	50 PPS 40G
	600	494	1686	256	873	50 PPS 60G
	800	658	2245	342	1167	50 PPS 80G
	1000	823	2808	427	1457	50 PPS 100G
	1200	988	3371	513	1750	50 PPS 120G
	1400	1152	3931	598	2040	50 PPS 140G
	1600	1317	4494	684	2334	50 PPS 160G
	1800	1481	5053	769	2624	50 PPS 180G
	2000	1646	5616	855	2917	50 PPS 200G
600mm	400	384	1310	200	682	60 PPS 40G
	600	577	1969	299	1020	60 PPS 60G
	800	769	2624	399	1361	60 PPS 80G
	1000	961	3279	499	1703	60 PPS 100G
	1200	1153	3934	599	2044	60 PPS 120G
	1400	1345	4589	699	2385	60 PPS 140G
	1600	1538	5248	798	2723	60 PPS 160G
	1800	1730	5903	898	3064	60 PPS 180G
	2000	1922	6558	998	3405	60 PPS 200G
	2300	2210	7541	1148	3917	60 PPS 230G
	2600	2499	8527	1297	4425	60 PPS 260G
3000	2883	9837	1497	5108	60 PPS 300G	

Type 22

Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
300mm	600	562	1918	289	986	30 PPD 60G
	1000	937	3197	483	1648	30 PPD 100G
	1400	1312	4477	675	2303	30 PPD 140G
	2000	1874	6394	965	3293	30 PPD 200G
400mm	400	479	1634	245	836	40 PPD 40G
	600	719	2453	368	1256	40 PPD 60G
	800	958	3269	491	1675	40 PPD 80G
	1000	1198	4088	614	2095	40 PPD 100G
	1200	1438	4906	736	2511	40 PPD 120G
	1400	1677	5722	859	2931	40 PPD 140G
	1600	1917	6541	982	3351	40 PPD 160G
	1800	2156	7356	1104	3767	40 PPD 180G
2000	2396	8175	1227	4187	40 PPD 200G	
500mm	400	578	1972	294	1003	50 PPD 40G
	600	866	2955	442	1508	50 PPD 60G
	800	1155	3941	589	2010	50 PPD 80G
	1000	1444	4927	736	2511	50 PPD 100G
	1200	1733	5913	883	3013	50 PPD 120G
	1400	2022	6899	1030	3514	50 PPD 140G
	1600	2310	7882	1177	4016	50 PPD 160G
	1800	2599	8868	1325	4521	50 PPD 180G
2000	2888	9854	1472	5022	50 PPD 200G	
600mm	400	670	2286	340	1160	60 PPD 40G
	600	1006	3432	510	1740	60 PPD 60G
	800	1341	4575	680	2320	60 PPD 80G
	1000	1676	5719	850	2900	60 PPD 100G
	1200	2011	6862	1020	3480	60 PPD 120G
	1400	2346	8005	1190	4060	60 PPD 140G
	1600	2682	9151	1360	4640	60 PPD 160G
	1800	3017	10294	1530	5220	60 PPD 180G
	2000	3352	11437	1700	5800	60 PPD 200G
	2300	3855	13153	1955	6670	60 PPD 230G
2600	4358	14869	2210	7541	60 PPD 260G	
3000	5028	17156	2549	8697	60 PPD 300G	

PLAN VERTICAL & PLAN PLUS VERTICAL

General specification & technical information

CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018.

GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.

COLOUR
All radiators are de-greased, phosphated and primer coated. An epoxy polyester finishing coat in white (RAL 9016) is applied to all front and rear surfaces.

ACCESSORIES
Touch up paint available on request.

SYSTEM
2 pipe pumped indirect domestic and commercial heating applications.

CONNECTIONS
6 x 1/2" BSP. Please see below.

AIR VENTS
Air vent and plug packs are included in the packaging.

OPERATING PRESSURES
Tested to a pressure of 8 bar.
Working pressure of up to 6 bar.

OPERATING TEMPERATURE
Maximum 100°C.

DELIVERY
2 - 5 working days.

VALVES
Please see page 58.

For more general information, please see page 256.

Weights & water contents per metre length

Type	Nominal Height (mm)			
	1800		1950	
	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
21	100.27	21.47	109.33	24.13
22	111.60	21.73	123.73	23.47

n-Coefficients

Type	Nominal Height (mm)	
	1800	1950
21	1.3192	1.3231
22	1.3387	1.4255

Connection options
6 x 1/2" BSP (15/21)

Mounting positions & dimensions

Type 21

Type 22

	Type	
	21	22
A (mm)	109	134
B (mm)	65	65
C (mm)	25	25

Length (mm)	D (mm)	E (mm)
	(mm)	(mm)
300	244	320
450	394	470
600	544	620
750	694	770

Top View
Type 21

Type 22

Bracket positions & dimensions

Length (mm)	L1 (mm)	L2 (mm)
	(mm)	(mm)
300	60	75
450	135	125
600	210	200
750	285	250

Brackets

NB: All measurements are nominal.


PLAN VERTICAL & PLAN PLUS VERTICAL

Heat outputs

Type 21



Type 22



PLAN VERTICAL


Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
1800mm	300	886	3023	452	1542	180 PX 30G
	450	1329	4535	678	2313	180 PX 45G
	600	1772	6046	903	3081	180 PX 60G
	750	2215	7558	1129	3852	180 PX 75G
1950mm	300	936	3194	476	1624	195 PX 30G
	450	1405	4794	714	2436	195 PX 45G
	600	1873	6391	953	3252	195 PX 60G
	750	2341	7987	1191	4064	195 PX 75G

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
1046	3569	528	1802	180 PD 30G
1569	5353	792	2702	180 PD 45G
2092	7138	1056	3603	180 PD 60G
2615	8922	1320	4504	180 PD 75G
1103	3763	532	1815	195 PD 30G
1654	5643	798	2723	195 PD 45G
2205	7523	1065	3634	195 PD 60G
2756	9403	1331	4541	195 PD 75G

Type 21



Type 22



PLAN PLUS VERTICAL

Nominal Height	Nominal Length (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
1800mm	300	886	3023	452	1542	180 PPX 30G
	450	1329	4535	678	2313	180 PPX 45G
	600	1772	6046	903	3081	180 PPX 60G
	750	2215	7558	1129	3852	180 PPX 75G
1950mm	300	936	3194	476	1624	195 PPX 30G
	450	1405	4794	714	2436	195 PPX 45G
	600	1873	6391	953	3252	195 PPX 60G
	750	2341	7987	1191	4064	195 PPX 75G

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
1046	3569	528	1802	180 PPD 30G
1569	5353	792	2702	180 PPD 45G
2092	7138	1056	3603	180 PPD 60G
2615	8922	1320	4504	180 PPD 75G
1103	3763	532	1815	195 PPD 30G
1654	5643	798	2723	195 PPD 45G
2205	7523	1065	3634	195 PPD 60G
2756	9403	1331	4541	195 PPD 75G

Accessories



TOWEL BAR

Product	Finish	Order Code
VALVE SETS (Includes a nut & olive pack)		
Two-pipe Valve Set (Straight)*	White	VSWHST
Two-pipe Valve Set (Straight)*	Chrome	VSCHST
Two-pipe Valve Set (Angle)*	White	VSWHAN
Two-pipe Valve Set (Angle)*	Chrome	VSCHAN
TOWEL BARS		
300mm	Matt Brushed Stainless Steel	PLANBAR300
450mm	Matt Brushed Stainless Steel	PLANBAR450
600mm	Matt Brushed Stainless Steel	PLANBAR600
750mm	Matt Brushed Stainless Steel	PLANBAR750



VSWHST



VSCHST



VSWHAN



VSCHAN

*Not to be used for top connection.






T6 COMPACT & T6 PLAN

The T6 COMPACT and T6 PLAN have a pioneering central connection, which allows for any size radiator to be installed once the pipe has been placed.

- Comes with patented T6 Technology
- The T6 is the only radiator with a patented T distribution system, aiding even heat up of the panel, allowing for the most effective water distribution
- Extensive range of size options
- Comes with pre-set valve, factory fitted for ease of installation
- The benefits of central connection radiators have been utilised across Europe for over 25 years

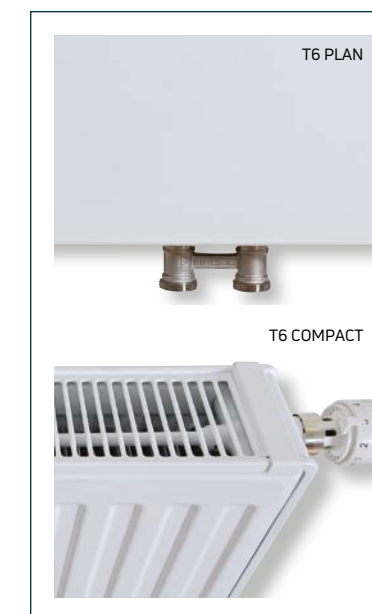

T6
Compact

T6
Plan

T6 COMPACT

T6 PLAN

T6 COMPACT & T6 PLAN

General overview



Pre-set valve

factory fitted and pre-installed for correct flow rates.

Can be reinstalled on the opposite side of the radiator if required.




Thermostatic sensor head

manufactured to work with the pre-set valve.

Sold separately. See page 70.

Note: not all TRV heads will fit.

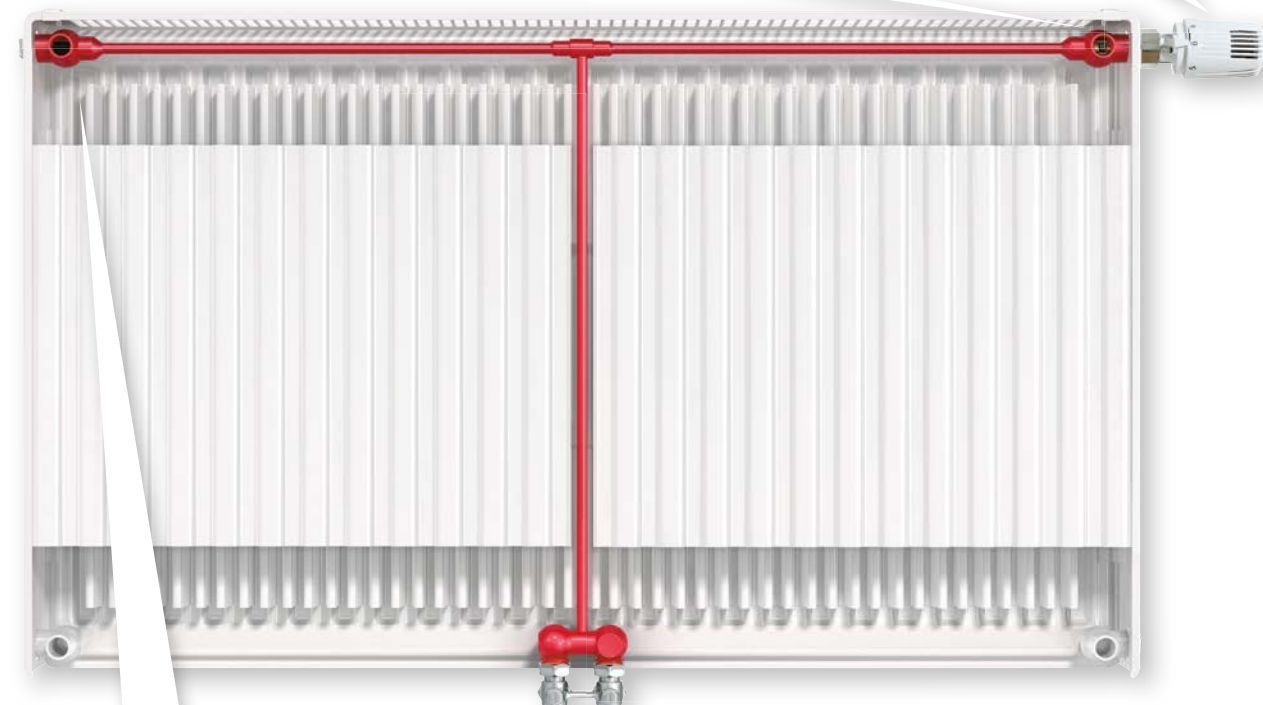

T6 vent plug

used to vent the radiator.

Pre-fitted and like the pre-set valve, can be removed and reinstalled on the opposite side of the radiator if required.




Twin entry valve

for central connection. Available in straight or angled.

Sold separately. See page 70.



T6
TECHNOLOGY

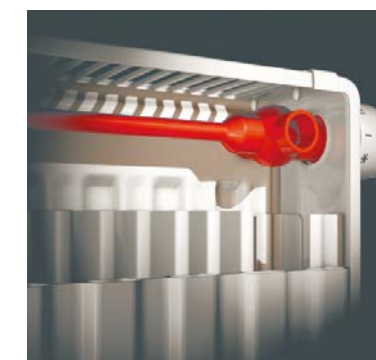

CENTRAL CONNECTION

- **Ultimate design/install flexibility:**
Central connection allows for any size radiator to be installed once pipes have been placed
- **Patented 'T' distribution system:**
T6 is the only radiator with this design, aiding even heat up of the panel
- **T6 provides the most effective water distribution method**

PRE-SET VALVE

- **Pre-balances the radiator to the correct flow rate:**
Based on the output of the radiator the correct valve is fitted at the factory
- **Pre-set valve is factory fitted for ease of installation. However it is removable and can be fitted to either side for added flexibility if required**
- **Helps maintain a more constant room temperature due to improved radiant output from panel**

Did you know?

- There are 106 T6 COMPACT and 82 T6 PLAN SKU's in the MYSON range
- T6 is the market leading central connection radiator across Europe
- Outputs range from 339W to 4454W
- The benefits of central connection radiators have been utilised across Europe for over 20 years
- There are 7 connection options in total. Central connection is optimum for the T6. Please see page 65.

T6 COMPACT & T6 PLAN

General specification & technical information

CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.

GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.

COLOUR
Finished in white (RAL 9016).

ACCESSORIES
Central connection twin entry valve and Herz TRV are sold separately. Please see page 70.

SYSTEM
2 pipe pumped indirect domestic and commercial heating applications.

CONNECTIONS
4 x 1/2" BSP connections and 2 x 3/4" external thread, bottom center connections.

AIR VENTS
Air vent and plug packs are pre-installed.

OPERATING PRESSURES
Tested to a pressure of 13 bar.
Working pressure of up to 10 bar.

OPERATING TEMPERATURE
Maximum 110°C.

DELIVERY
2 - 5 working days.

VALVES
Please see page 70.

BIM
Visit our website to download the BIM components www.myson.co.uk/bim

For more general information, please see page 256.

T6 COMPACT weights & water contents per metre length

Type	Nominal Height (mm)							
	300		400		500		600	
	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
11	11.35	2.00	14.78	2.60	16.61	3.30	18.41	3.70
21	-	-	-	-	25.29	6.10	28.82	7.10
22	19.45	3.90	26.03	5.00	29.79	6.10	33.36	7.10

T6 PLAN weights & water contents per metre length

Type	Nominal Height (mm)							
	300		400		500		600	
	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
11	14.20	2.00	18.54	2.60	21.29	3.30	24.00	3.70
21	-	-	-	-	30.27	6.10	34.41	7.10
22	22.30	3.90	29.79	5.00	34.47	6.10	38.95	7.10


T6 COMPACT & T6 PLAN n-Coefficients

Type	Nominal Height (mm)							
	300		400		500		600	
	T6 COMPACT	T6 PLAN	T6 COMPACT	T6 PLAN	T6 COMPACT	T6 PLAN	T6 COMPACT	T6 PLAN
11	1.330	1.311	1.342	1.321	1.330	1.313	1.319	1.303
21	-	-	-	-	1.323	1.299	1.310	1.302
22	1.307	1.304	1.353	1.328	1.334	1.322	1.343	1.337

Connection options


Centre connection 2 x 3/4"

For optimum performance



*Flow specific.




External thread 4 x 1/2" BSP

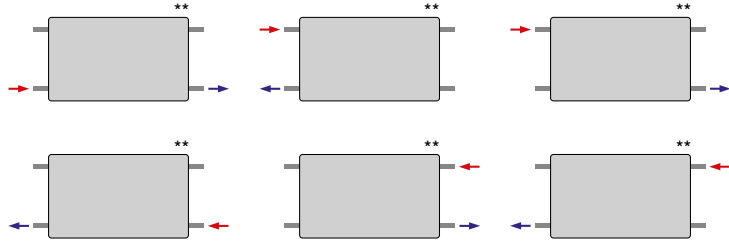

**When installing the T6 COMPACT & T6 PLAN radiators using the standard 4 x 1/2" BSP connections, the 3/4" bottom centre connections must be capped off using chrome caps (order code: TEBLANKCAP).

NOTE: If using any of the above connections, the pre-set valve and baffle on the vent plug need to be removed and capped where necessary.

Mounting positions, dimensions & wall brackets

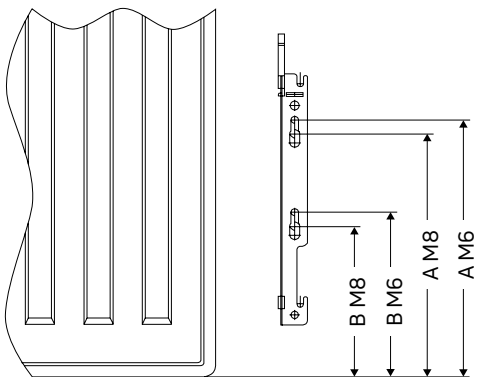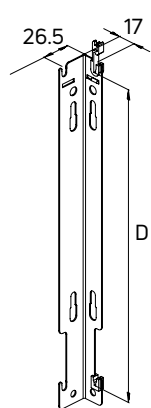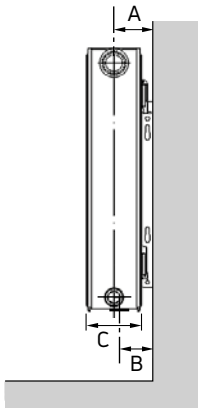

Type	A (mm)	B (mm)	C (mm)
11	50	50	61
21	74	66	80
22	86	66	105


Height (mm)	D (mm)
300	123
400	223
500	323
600	423

Height (mm)	M8		M6	
	A (mm)	B (mm)	A (mm)	B (mm)
300	138	-	152.5	-
400	238	143	252.5	157.5
500	338	143	352.5	157.5
600	438	143	452.5	157.5

A = Wall to side connection.
B = Wall to centre bottom connection.

NB: All measurements are nominal.

Bracket positions & dimensions

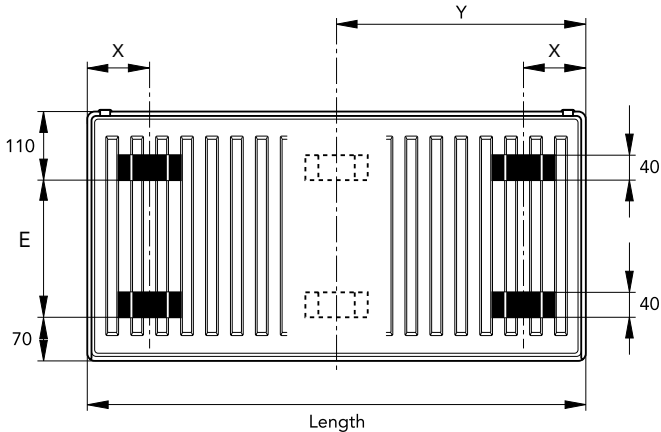

Type	X (mm)	Nominal Height (mm)	E (mm)
11	93	300	120
21	100	400	220
22	100	500	320
		600	420

Dimension Y = $\frac{\text{Overall Length}}{2}$

For all radiators with an overall length of 1800mm and above.

T6 COMPACT

Heat outputs

PREMIUM PANEL RADIATORS

PREMIUM PANEL RADIATORS

Type 11



Nominal Height	Nominal Length (mm)
300mm	600
	1000
	1400
	2000
400mm	400
	600
	800
	1000
	1200
	1400
	1600
	1800
500mm	2000
	400
	520
	600
	720
	800
	920
	1000
	1200
	1400
600mm	1600
	1800
	2000
	400
	520
	600
	720
	800
	920
	1000

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
339	1157	172	587	T6C 30 SC 60
565	1928	286	977	T6C 30 SC 100
791	2699	401	1368	T6C 30 SC 140
1130	3856	573	1955	T6C 30 SC 200
283	966	143	487	T6C 40 SC 40
425	1450	214	731	T6C 40 SC 60
566	1931	285	973	T6C 40 SC 80
708	2416	357	1217	T6C 40 SC 100
850	2900	428	1461	T6C 40 SC 120
991	3381	499	1703	T6C 40 SC 140
1133	3866	571	1948	T6C 40 SC 160
1274	4347	642	2190	T6C 40 SC 180
1416	4831	713	2434	T6C 40 SC 200
337	1150	171	583	T6C 50 SC 40
438	1494	222	757	T6C 50 SC 52
506	1726	257	875	T6C 50 SC 60
607	2071	308	1050	T6C 50 SC 72
674	2300	342	1166	T6C 50 SC 80
776	2648	393	1342	T6C 50 SC 92
843	2876	427	1458	T6C 50 SC 100
1012	3453	513	1750	T6C 50 SC 120
1180	4026	598	2041	T6C 50 SC 140
1349	4603	684	2333	T6C 50 SC 160
1517	5176	769	2624	T6C 50 SC 180
1686	5753	855	2916	T6C 50 SC 200
376	1283	192	654	T6C 60 SC 40
488	1665	249	849	T6C 60 SC 52
563	1921	287	979	T6C 60 SC 60
676	2307	345	1176	T6C 60 SC 72
751	2562	383	1306	T6C 60 SC 80
864	2948	440	1503	T6C 60 SC 92
939	3204	479	1633	T6C 60 SC 100
1052	3589	536	1830	T6C 60 SC 112
1127	3845	575	1960	T6C 60 SC 120
1239	4227	632	2155	T6C 60 SC 132
1315	4487	670	2287	T6C 60 SC 140
1502	5125	766	2613	T6C 60 SC 160
1690	5766	862	2939	T6C 60 SC 180
1878	6408	957	3267	T6C 60 SC 200
2441	8329	1244	4246	T6C 60 SC 260

Type 21



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
491	1675	250	852	T6C 50 DPX 40
638	2177	325	1108	T6C 50 DPX 52
736	2511	374	1277	T6C 50 DPX 60
883	3013	449	1533	T6C 50 DPX 72
982	3351	500	1705	T6C 50 DPX 80
1129	3852	574	1960	T6C 50 DPX 92
1227	4187	624	2130	T6C 50 DPX 100
1472	5022	749	2555	T6C 50 DPX 120
1718	5862	874	2982	T6C 50 DPX 140
1963	6698	999	3408	T6C 50 DPX 160
2209	7537	1124	3834	T6C 50 DPX 180
2454	8373	1248	4260	T6C 50 DPX 200
543	1853	278	949	T6C 60 DPX 40
706	2409	362	1234	T6C 60 DPX 52
814	2777	417	1422	T6C 60 DPX 60
977	3334	500	1707	T6C 60 DPX 72
1086	3705	556	1897	T6C 60 DPX 80
1248	4258	639	2181	T6C 60 DPX 92
1357	4630	695	2371	T6C 60 DPX 100
1520	5186	778	2656	T6C 60 DPX 112
1628	5555	834	2845	T6C 60 DPX 120
1791	6111	917	3130	T6C 60 DPX 132
1900	6483	973	3320	T6C 60 DPX 140
2171	7407	1112	3793	T6C 60 DPX 160
2443	8336	1251	4269	T6C 60 DPX 180
2714	9260	1390	4742	T6C 60 DPX 200

Type 22



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
616	2102	316	1078	T6C 30 DC 60
1026	3501	526	1796	T6C 30 DC 100
1436	4900	737	2513	T6C 30 DC 140
2052	7001	1052	3591	T6C 30 DC 200
543	1853	272	928	T6C 40 DC 40
814	2777	408	1391	T6C 40 DC 60
1086	3705	544	1856	T6C 40 DC 80
1357	4630	680	2320	T6C 40 DC 100
1628	5555	816	2783	T6C 40 DC 120
1900	6483	952	3248	T6C 40 DC 140
2171	7407	1088	3711	T6C 40 DC 160
2443	8336	1224	4176	T6C 40 DC 180
2714	9260	1360	4639	T6C 40 DC 200
617	2105	312	1065	T6C 50 DC 40
802	2736	406	1384	T6C 50 DC 52
926	3160	468	1599	T6C 50 DC 60
1111	3791	562	1918	T6C 50 DC 72
1234	4210	624	2130	T6C 50 DC 80
1420	4845	718	2451	T6C 50 DC 92
1543	5265	781	2663	T6C 50 DC 100
1852	6319	937	3197	T6C 50 DC 120
2160	7370	1093	3728	T6C 50 DC 140
2469	8424	1249	4262	T6C 50 DC 160
2777	9475	1405	4793	T6C 50 DC 180
3086	10529	1561	5326	T6C 50 DC 200
685	2337	345	1177	T6C 60 DC 40
891	3040	449	1531	T6C 60 DC 52
1028	3508	518	1767	T6C 60 DC 60
1233	4207	621	2119	T6C 60 DC 72
1370	4674	690	2354	T6C 60 DC 80
1576	5377	794	2708	T6C 60 DC 92
1713	5845	863	2943	T6C 60 DC 100
1919	6548	966	3297	T6C 60 DC 112
2056	7015	1035	3533	T6C 60 DC 120
2261	7715	1139	3885	T6C 60 DC 132
2398	8182	1208	4120	T6C 60 DC 140
2741	9352	1380	4709	T6C 60 DC 160
3083	10519	1552	5297	T6C 60 DC 180
3426	11690	1725	5887	T6C 60 DC 200
4454	15197	2243	7653	T6C 60 DC 260

HOW TO ORDER
YOUR T6 COMPACT

1

Choose your
T6 COMPACT

Includes brackets

2

Choose your
twin entry valve:
Straight (TEVS)
Angled (TEVA)

Includes a nut & olive pack

3

Don't forget
your TRV head:
Herz TRV
(HERZ)

T6 PLAN

Heat outputs

PREMIUM PANEL RADIATORS

PREMIUM PANEL RADIATORS

Type 11



Nominal Height	Nominal Length (mm)
300mm	600
	1000
	1400
	2000
400mm	400
	600
	800
	1000
	1200
	1400
	1600
	1800
500mm	2000
	400
	600
	800
	1000
	1200
	1400
600mm	1600
	1800
	2000
	400
	600
	800
	1000
600mm	1200
	1400
	1600
	1800
	2000
	2600
	400
	600
	800
	1000

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
319	1088	163	557	T6P 30 SC 60
532	1815	272	929	T6P 30 SC 100
745	2542	381	1301	T6P 30 SC 140
1064	3630	545	1858	T6P 30 SC 200
264	901	134	459	T6P 40 SC 40
396	1351	202	688	T6P 40 SC 60
528	1802	269	918	T6P 40 SC 80
660	2252	336	1147	T6P 40 SC 100
792	2702	403	1376	T6P 40 SC 120
924	3153	471	1606	T6P 40 SC 140
1056	3603	538	1835	T6P 40 SC 160
1188	4053	605	2064	T6P 40 SC 180
1320	4504	672	2294	T6P 40 SC 200
314	1071	161	548	T6P 50 SC 40
470	1604	240	820	T6P 50 SC 60
627	2139	321	1094	T6P 50 SC 80
784	2675	401	1368	T6P 50 SC 100
941	3211	481	1642	T6P 50 SC 120
1098	3746	561	1915	T6P 50 SC 140
1254	4279	641	2188	T6P 50 SC 160
1411	4814	722	2462	T6P 50 SC 180
1568	5350	802	2736	T6P 50 SC 200
338	1153	174	593	T6P 60 SC 40
506	1726	260	887	T6P 60 SC 60
675	2303	347	1184	T6P 60 SC 80
844	2880	434	1480	T6P 60 SC 100
1013	3456	521	1776	T6P 60 SC 120
1182	4033	608	2073	T6P 60 SC 140
1350	4606	694	2367	T6P 60 SC 160
1519	5183	781	2664	T6P 60 SC 180
1688	5759	868	2960	T6P 60 SC 200
2194	7486	1128	3848	T6P 60 SC 260

Type 21



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
469	1600	242	824	T6P 50 DPX 40
704	2402	363	1237	T6P 50 DPX 60
938	3200	483	1648	T6P 50 DPX 80
1173	4002	604	2061	T6P 50 DPX 100
1408	4804	725	2474	T6P 50 DPX 120
1642	5603	846	2886	T6P 50 DPX 140
1877	6404	967	3298	T6P 50 DPX 160
2111	7203	1087	3710	T6P 50 DPX 180
2346	8005	1208	4123	T6P 50 DPX 200
520	1774	267	912	T6P 60 DPX 40
781	2665	402	1370	T6P 60 DPX 60
1041	3552	535	1827	T6P 60 DPX 80
1301	4439	669	2283	T6P 60 DPX 100
1561	5326	803	2739	T6P 60 DPX 120
1821	6213	936	3195	T6P 60 DPX 140
2082	7104	1071	3653	T6P 60 DPX 160
2342	7991	1204	4109	T6P 60 DPX 180
2602	8878	1338	4565	T6P 60 DPX 200

Type 22



Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
590	2013	303	1034	T6P 30 DC 60
984	3357	505	1724	T6P 30 DC 100
1378	4702	708	2415	T6P 30 DC 140
1968	6715	1011	3449	T6P 30 DC 200
534	1822	271	925	T6P 40 DC 40
802	2736	407	1388	T6P 40 DC 60
1069	3647	542	1851	T6P 40 DC 80
1336	4558	678	2313	T6P 40 DC 100
1603	5469	813	2775	T6P 40 DC 120
1870	6380	949	3237	T6P 40 DC 140
2138	7295	1085	3702	T6P 40 DC 160
2405	8206	1220	4164	T6P 40 DC 180
2672	9117	1356	4626	T6P 40 DC 200
608	2074	309	1056	T6P 50 DC 40
912	3112	464	1584	T6P 50 DC 60
1216	4149	619	2112	T6P 50 DC 80
1520	5186	774	2640	T6P 50 DC 100
1824	6223	928	3167	T6P 50 DC 120
2128	7261	1083	3696	T6P 50 DC 140
2432	8298	1238	4224	T6P 50 DC 160
2736	9335	1393	4751	T6P 50 DC 180
3040	10372	1547	5279	T6P 50 DC 200
668	2279	337	1151	T6P 60 DC 40
1001	3415	506	1725	T6P 60 DC 60
1335	4555	674	2301	T6P 60 DC 80
1669	5695	843	2877	T6P 60 DC 100
2003	6834	1012	3452	T6P 60 DC 120
2337	7974	1180	4028	T6P 60 DC 140
2670	9110	1349	4602	T6P 60 DC 160
3004	10250	1517	5177	T6P 60 DC 180
3338	11389	1686	5753	T6P 60 DC 200
4339	14805	2192	7478	T6P 60 DC 260

HOW TO ORDER
YOUR T6 PLAN



1


Choose your
T6 PLAN



Includes brackets

2

Choose your
twin entry valve:
Straight (TEVS)
Angled (TEVA)



Includes a nut & olive pack

3

Don't forget
your TRV head:
Herz TRV
(HERZ)




HERZ

Accessories

Product	Order Code
Twin Entry Valve (Straight)*	TEVS
Twin Entry Valve (Angled)*	TEVA
Twin Entry Reversible Flow Valve (Straight)*	TERFVS
Twin Entry Reversible Flow Valve (Angled)*	TERFVA
3/4" Chrome Caps - to blank off the twin-entry tappings	TEBLANKCAP
15mm Nut & Olive Pack (Copper)	NOP15
Herz-TS Thermostatic Sensor Head (White)	HERZ




TEVS



TEVA



TERFVS



TERFVA



TEBLANKCAP



NOP15



HERZ

*Nut & olive pack included





The ULOW-E2 is the ultimate choice when it comes to intelligent, low temperature heating. It uses in-built fans to force convection and produces heat outputs up to 60% more than traditional radiators. It has intelligent controls allowing the fans to work on a sliding scale where the water temperature must be 3°C higher than the set point. It is highly flexible, utilising central connection technology and has a “summer breeze” function for air circulation on warm days.

- The MYSON ULOW-E2 is available in nine sizes
- It is available in one type, double panel with factory fitted top grille and side panels as standard
- It comes in a height of 600mm
- We offer lengths from 400mm to 2000mm
- All our ULOW-E2 radiators come with a white electronic thermostatic actuator
- Central connection twin entry valve and nut & olive pack supplied separately



ULOW-E2




ULOW-E2 CONTROLS

ULOW-E2 FANS


ULOW-E2



PLEASE NOTE: A twin entry valve and nut & olive pack are required for the central connection. These must be purchased separately.

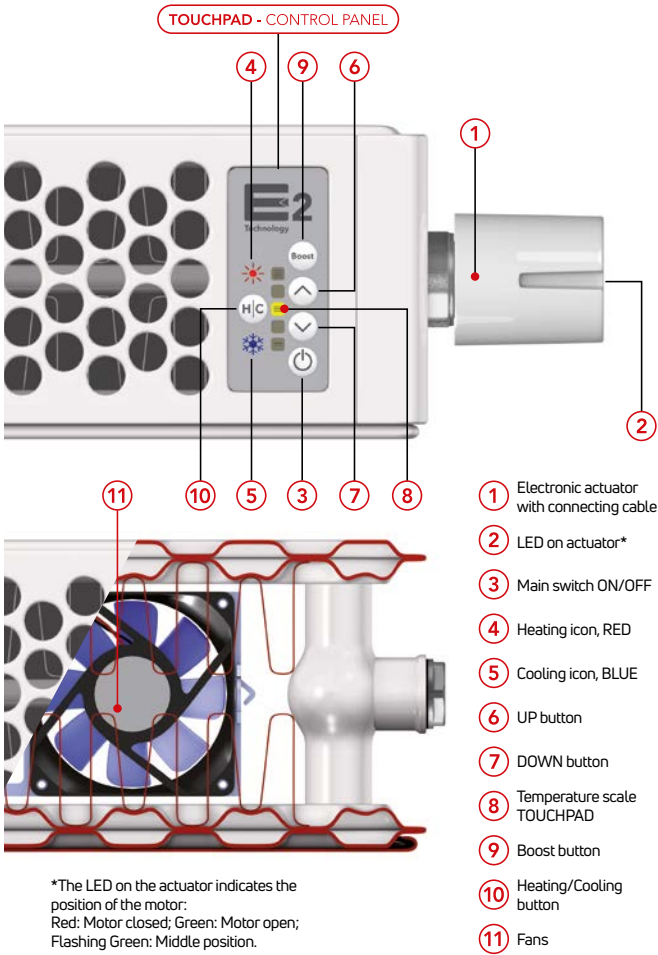

Low temperature compatible


The ULOW-E2 provides enhanced convection via in-built fans. This enables heat sources to operate at their most energy efficient settings. The result is a heating concept that can provide high heat outputs even at lower water temperatures.

Rapid response heating

Due to its combination of both radiant heat and enhanced convection, plus intelligent controls that automatically switch between static and dynamic operation, the ULOW-E2 provides a rapid heat response even at low water temperatures. Indoor comfort is quickly and efficiently achieved.


Intelligent controls

The E2 technology automatically and intelligently controls operation of the in-built fans to ensure maximum performance. The intelligence behind the ULOW-E2 means that the fans will only operate when they are required.

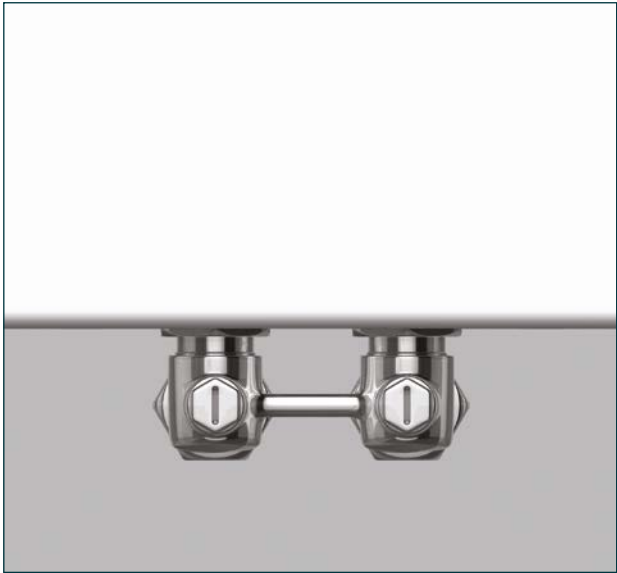

Central connection technology

The central connection system is easy to install and provides significant benefits. This extremely clever idea gives complete planning and installation freedom. Once in operation it will help the room feel warmer, faster by distributing hot water from the top of the ULOW-E2 downwards.

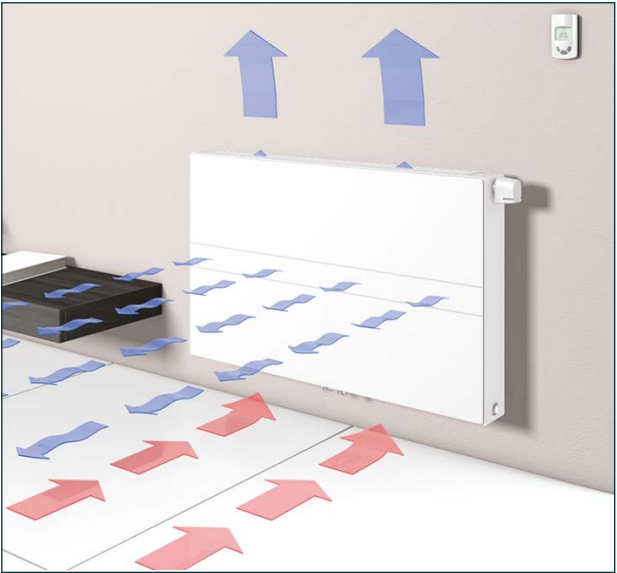

Summer breeze effect

During the summer months the fans from the ULOW-E2 provide gentle air movement to create a pleasant 'summer breeze' effect.

ULOW-E2

General specification & technical information

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001. Conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU. Sound levels are tested to VDI 2081.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Primer coated and finished in white (RAL 9016).
- ACCESSORIES**
Central connection twin entry valve and nut & olive pack are sold separately.
- SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.
- CONNECTIONS**
4 x G ½" internal thread and 2 x G ¾" external thread, underside centre. Thermostat valve top right (can be swapped to top left).
- AIR VENTS**
Air vent and plug packs are pre-installed.
- OPERATING PRESSURES**
Tested to a pressure of 10 bar.
Working pressure of up to 13 bar.
- OPERATING TEMPERATURE**
Maximum 60°C (due to electrical components).
- ELECTRICAL SUPPLY**
220-240V-50Hz.
- IP RATING**
IP24.
- DELIVERY**
2 - 5 working days.
- VALVES**
Supplied with a white electronic thermostatic actuator as standard.

For more general information, please see page 256.

Weights & water contents per metre length, sound levels, motor power & n-coefficients


Model	Nominal Height (mm)	Nominal Length (mm)	Weight (kg)	Water Content (l)	No. of Fans	Sound Pressure (dBA) (at 2m)		Power (W)	n-Coefficients		
						Comfort	Boost		Static	Comfort	Boost
E2 60 DC 40	600	400	17.13	2.84	2	20.3	30.7	3.5	1.317	1.129	1.112
E2 60 DC 60	600	600	24.59	4.26	4	22.9	32.6	4.9	1.317	1.129	1.112
E2 60 DC 80	600	800	32.06	5.68	6	24.4	33.7	6.4	1.317	1.129	1.112
E2 60 DC 100	600	1000	39.70	7.10	8	25.4	34.4	7.8	1.317	1.129	1.112
E2 60 DC 120	600	1200	47.16	8.52	10	26.3	35.1	9.3	1.317	1.129	1.112
E2 60 DC 140	600	1400	53.02	9.94	12	26.9	35.6	10.8	1.317	1.129	1.112
E2 60 DC 160	600	1600	62.27	11.36	14	27.5	36.0	12.1	1.317	1.129	1.112
E2 60 DC 180	600	1800	69.91	12.78	16	28.0	36.3	13.6	1.317	1.129	1.112
E2 60 DC 200	600	2000	77.37	14.20	18	28.4	36.6	15.0	1.317	1.129	1.112

Sound levels tested in accordance with ISO 3741.


Mounting positions, dimensions & wall brackets

Nominal Height (mm)	A (mm)	B (mm)
600	435	139

Bracket positions & dimensions

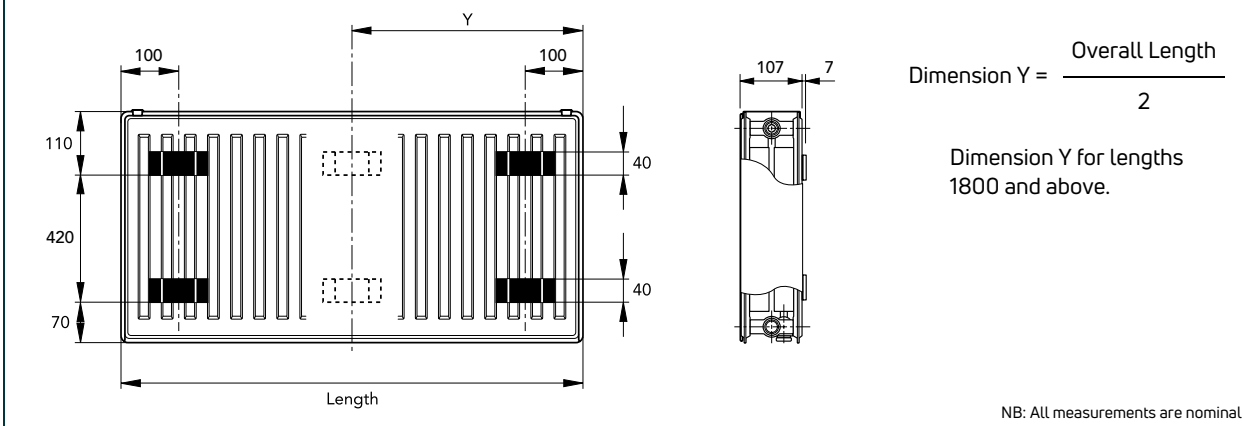

Type 22



Heat outputs

Nominal Height	Nominal Length (mm)	Operation Mode	Heat Outputs @ ΔT 30°C		Order Code
			Watts	Btu/h	
600mm	400	Static	314	1071	E2 60 DC 40
		Comfort	430	1467	
		Boost	498	1699	
	600	Static	471	1607	E2 60 DC 60
		Comfort	646	2204	
		Boost	746	2545	
	800	Static	628	2143	E2 60 DC 80
		Comfort	861	2938	
		Boost	995	3395	
	1000	Static	785	2678	E2 60 DC 100
		Comfort	1076	3671	
		Boost	1243	4241	
	1200	Static	942	3214	E2 60 DC 120
		Comfort	1291	4405	
		Boost	1491	5087	
	1400	Static	1098	3746	E2 60 DC 140
		Comfort	1506	5138	
		Boost	1741	5940	
	1600	Static	1255	4282	E2 60 DC 160
		Comfort	1723	5879	
		Boost	1989	6786	
	1800	Static	1412	4818	E2 60 DC 180
		Comfort	1938	6612	
		Boost	2238	7636	
	2000	Static	1569	5353	E2 60 DC 200
		Comfort	2153	7346	
		Boost	2486	8482	

PLEASE NOTE: ULOW-E2 should be sized based on comfort mode outputs.

Accessories

Product	Order Code
Twin Entry Valve (Straight)	TEVS
Twin Entry Valve (Angled)	TEVA
Twin Entry Reversible Flow Valve (Straight)	TERFVS
Twin Entry Reversible Flow Valve (Angled)	TERFVA
15mm Nut & Olive Pack (Copper)	NOP15



Design radiators

Using radiators as fashionable as well as functional items has become more popular over recent years. Our design radiators not only look great, they also provide excellent heat outputs, making them perfect for both commercial and domestic applications. Our design radiators are not only beautiful, they're flexible too, with all offering horizontal and vertical installations.

COLUMN and DÉCOR are ideal for large commercial projects or just to add the finishing touch to a domestic project. OPUS is practical and stylish, offering high heat outputs and attractive design.

**ELECTRIC MODEL
AVAILABLE**


Please see page 208

The COLUMN range from MYSON combines elegant style with practical design. At the forefront of the design radiator revolution, the COLUMN will make a focal point in any room. Available in vertical and horizontal models and in a selected range of colour options and sizes, the COLUMN radiator creates a selection of new interior design possibilities for you.

- There are over 60 stocked models available, with heights ranging from 300mm to 2000mm and lengths from 300mm to 1800mm
- Manufactured using a unique laser welding process that virtually eliminates the visible welding points
- The COLUMN radiator is also available as an electric model for instant heat as well as style, please see page 208



COLUMN HORIZONTAL

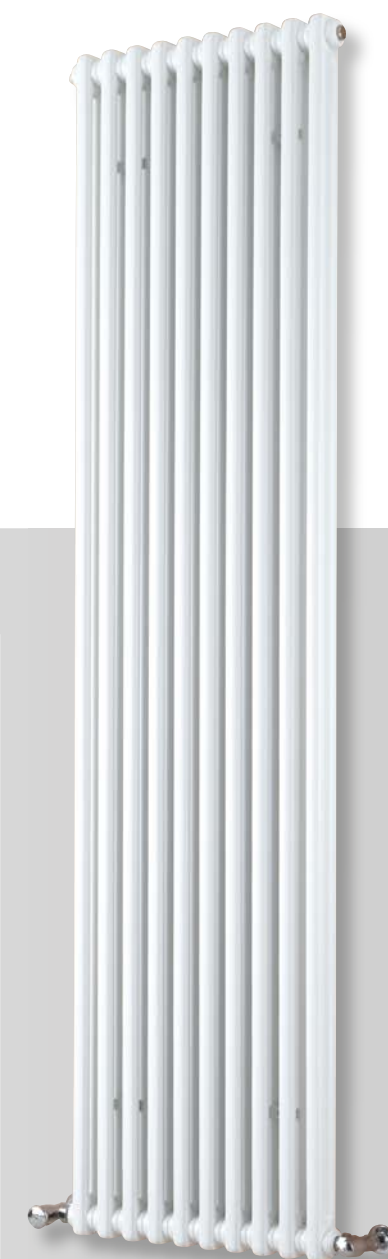

COLUMN VERTICAL

COLUMN

COLUMN

General specification & technical information

CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.

GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.

COLOUR
Standard stocked finish is white (RAL 9016). For other special colour options please see page 258.

MATERIAL
Manufactured from 1.25mm steel.

ACCESSORIES
Please see page 85. Touch up paint available on request.

SYSTEM
2 pipe pumped indirect domestic and commercial heating applications.

CONNECTIONS
4 x 1/2" BSP as standard.

AIR VENTS
Air vent and plug packs are included in the packaging.

OPERATING PRESSURES
Tested to a pressure of 13 bar.
Working pressure of up to 10 bar.

OPERATING TEMPERATURE
Maximum 100°C.

DELIVERY
Stocked items (white): 2 - 5 working days.
Non-stocked items (colour): 4 - 6 weeks.

VALVES
Please see page 219.

BIM
Visit our website to download the BIM components
www.myson.co.uk/bim

SPECIALS
Visit our website to download the BIM components
www.myson.co.uk/bim

For more general information, please see page 256.

Weights & water contents per section

Columns	Nominal Height (mm)											
	300		450		600		750		1800		2000	
	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
2	-	-	0.75	0.53	0.98	0.66	-	-	2.82	1.72	3.12	1.90
3	0.78	0.57	1.12	0.76	1.46	0.96	1.79	1.15	-	-	-	-
4	1.05	0.75	1.49	1.01	1.94	1.26	2.39	1.51	-	-	-	-

n-Coefficients

Columns	Nominal Height (mm)					
	300	450	600	750	1800	2000
2	-	1.2325	1.2415	-	1.3197	1.3289
3	1.2270	1.2445	1.2604	1.2750	-	-
4	1.2297	1.2564	1.2793	1.2986	-	-

Mounting positions, dimensions & wall brackets


Model	Nominal Depth (mm)	A Distance from Wall (mm)	B Connection Distance from Wall (mm)
2 Column	63	31 / 41	63 / 73
3 Column	101	31 / 41	82 / 92
4 Column	139	31 / 41	101 / 111

Standard Brackets
(included with every product)

Floor brackets (optional extras)

Clamped Floor Bracket FK*

For use with 2-4 column radiators up to 500mm high




Complete system for free-standing radiators, from 2-4 column up to 500mm height. Finished in white (RAL 9016).

Comprises;

- 3mm thick base-plate fixing for either finished or unfinished floors.

Floor Bracket SK*


For use with 2-4 column radiators up to 1000mm high

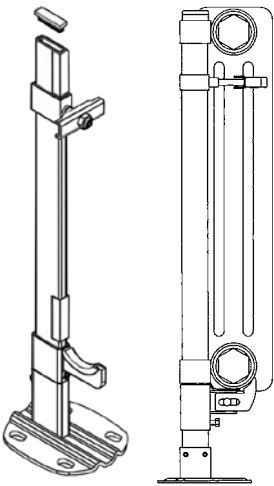

Complete system for free-standing radiators, from 2-4 column up to 1000mm height. Finished in white (RAL 9016).

Comprises;


- 3mm thick base-plate for fixing to either finished or unfinished floors
- upright support 35 x 10 x 1.5mm, fixing set with adjustable bracket, security fixing, anti-vibration insert
- adjustable bottom support with spacer and security fixing, anti-vibration insert, white plastic end stop for top of upright.



*Please contact Customer Services for correct number of brackets required per radiator.

Dimensions of base-plate for Clamped Floor Bracket FK and Floor Bracket SK

Two-part cover for base-plate in white plastic for Clamped Floor Bracket FK and Floor Bracket SK (Only available in white)



NB: All measurements are nominal.

COLUMN

Technical information (cont...)

Connection options

4 x 1/2" BSP

All MYSON COLUMN radiators are manufactured with an internal baffle to help with water flow. The tapping with the baffle is identified with a red plastic cap, all others being blue. It is important that the water inlet is connected to the tapping identified in red.

All MYSON COLUMN radiators are reversible so any of the following connections are possible:

NB: Bottom opposite end connection is recommended for 2000mm high radiators.

Heat outputs

COLUMN vertical - 2 column

	Nominal Height	Nominal Width (mm)	No. of Sections
	1800mm	300	6
		400	8
		500	10
		600	12
		750	15
	2000mm	300	6
		400	8
		500	10
		600	12
		750	15

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
793	2706	401	1368	6 SEC 2180
1058	3610	534	1822	8 SEC 2180
1322	4511	668	2279	10 SEC 2180
1587	5415	802	2736	12 SEC 2180
1983	6766	1002	3419	15 SEC 2180
880	3002	443	1512	6 SEC 2200
1174	4005	590	2013	8 SEC 2200
1468	5010	738	2518	10 SEC 2200
1761	6008	886	3023	12 SEC 2200
2202	7515	1107	3777	15 SEC 2200

COLUMN horizontal - 2 column

	450mm	600	12
		800	16
		1000	20
		1200	24
		1400	28
		1800	36
	600mm	600	12
		800	16
		1000	20
		1200	24
		1400	28

435	1485	230	785	12 SEC 2045
580	1980	307	1047	16 SEC 2045
725	2474	384	1310	20 SEC 2045
870	2969	461	1573	24 SEC 2045
1015	3464	538	1836	28 SEC 2045
1305	4454	691	2358	36 SEC 2045
564	1925	298	1017	12 SEC 2060
752	2567	397	1355	16 SEC 2060
940	3209	496	1692	20 SEC 2060
1128	3850	595	2030	24 SEC 2060
1316	4490	694	2368	28 SEC 2060

COLUMN horizontal - 3 column

	300mm	800	16
		1000	20
		1400	28
		1800	36
	450mm	600	12
		800	16
		1000	20
		1200	24
		1400	28
		1800	36

566	1933	299	1020	16 SEC 3030
708	2416	374	1276	20 SEC 3030
991	3382	524	1788	28 SEC 3030
1274	4348	673	2296	36 SEC 3030
605	2064	319	1088	12 SEC 3045
807	2753	426	1454	16 SEC 3045
1009	3443	532	1815	20 SEC 3045
1211	4132	638	2177	24 SEC 3045
1413	4821	745	2542	28 SEC 3045
1818	6203	958	3269	36 SEC 3045

COLUMN

Heat outputs (cont...)

COLUMN horizontal - 3 column (cont...)

	600mm	Nominal Width (mm)	No. of Sections
		600	12
		800	16
		1000	20
		1200	24
		1400	28
	750mm	600	12
		800	16
		1000	20
		1200	24
		1400	28




Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
780	2661	407	1389	12 SEC 3060
1041	3552	542	1849	16 SEC 3060
1301	4439	678	2313	20 SEC 3060
1561	5326	814	2777	24 SEC 3060
1821	6213	949	3238	28 SEC 3060
952	3248	492	1679	12 SEC 3075
1270	4335	656	2238	16 SEC 3075
1588	5418	820	2798	20 SEC 3075
1905	6500	984	3357	24 SEC 3075
2223	7586	1148	3917	28 SEC 3075

COLUMN horizontal - 4 column




	300mm	800	16
		1000	20
		1400	28
		1800	36
	450mm	600	12
		800	16
		1000	20
		1200	24
		1400	28
		1800	36
	600mm	600	12
		800	16
		1000	20
		1200	24
		1400	28
	750mm	600	12
		800	16
		1000	20
		1200	24
		1400	28

729	2487	386	1317	16 SEC 4030
911	3108	482	1645	20 SEC 4030
1276	4354	675	2303	28 SEC 4030
1640	5596	868	2962	36 SEC 4030
776	2648	404	1378	12 SEC 4045
1035	3531	539	1839	16 SEC 4045
1294	4415	674	2300	20 SEC 4045
1552	5295	809	2760	24 SEC 4045
1811	6179	944	3221	28 SEC 4045
2328	7943	1213	4139	36 SEC 4045
997	3402	515	1757	12 SEC 4060
1329	4537	686	2341	16 SEC 4060
1662	5671	858	2927	20 SEC 4060
1994	6805	1030	3514	24 SEC 4060
2327	7939	1201	4098	28 SEC 4060
1213	4139	620	2115	12 SEC 4075
1618	5521	827	2822	16 SEC 4075
2023	6902	1034	3528	20 SEC 4075
2427	8281	1241	4234	24 SEC 4075
2832	9663	1448	4941	28 SEC 4075

Accessories



Product			Order Code
Microfibre Cleaning Brush			COLUMNBRUSH2
Towel Rail - Clip-on to fit all radiators up to 1000mm wide (20 sections)			12SECRAIL
			16SECRAIL
			20SECRAIL
Decorative Foot* (not load bearing)			COLDECFOOT
Base-Plate Cover* - For use with both floor brackets			COVERSKFK
Clamped Floor Bracket FK			FK1021
Floor Bracket SK	Height of Bracket (mm)	Height of Radiator (mm)	Order Code
	460	300	SK20046
	610	450	SK20061
	760	600	SK20076
	910	750	SK20091



*Supplied in white (RAL 9016) only.



The MYSON DÉCOR range has played a leading role in the world of interior design over the past decade. It treats radiators as decorative items as well as heating devices. With a range of sizes and tube designs available, the MYSON DÉCOR range offers a stunning alternative to mainstream radiators.

- Comes in horizontal, vertical and plinth models, in a range of heights from 155mm to 2000mm and lengths from 308mm to 2200mm
- Available in special made to order sizes and selected colours to suit all spaces and tastes
- Electric model also available, please see page 206



DÉCOR

DÉCOR


General specification & technical information

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Standard stocked finish is white (RAL 9016). For other special colour options please see page 258.
- MATERIAL**
Header tubes: Manufactured from 1.5mm steel.
Heating tubes: Manufactured from 1.25mm steel.
KH models: Manufactured from 1.5mm steel.
- ACCESSORIES**
Touch up paint available on request.
- SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.
- CONNECTIONS**
2 & 4 x 1/2" BSP as standard.
- AIR VENTS**
Air vent and plug packs are included in the packaging.
- OPERATING PRESSURES**
All models (excl. KH models): Tested to a pressure of 5.2 bar.
Working pressure of up to 4 bar.
KH models: Tested to a pressure of 8 bar.
Working pressure of up to 5 bar.
- OPERATING TEMPERATURE**
Maximum 100°C.
- DELIVERY**
Stocked items (white): 2 - 5 working days.
Non-stocked items and colour: 4 - 6 weeks.
- VALVES**
Please see page 219.
- BIM**
Visit our website to download the BIM components
www.myson.co.uk/bim
- SPECIALS**
Please refer to the full DÉCOR technical guide for special sizes and colour options.

For more general information, please see page 256.

Connection options

2 & 4 x 1/2" BSP
IMPORTANT: MYSON DÉCOR radiators are high performance, universal radiators that come with a choice of connection options.

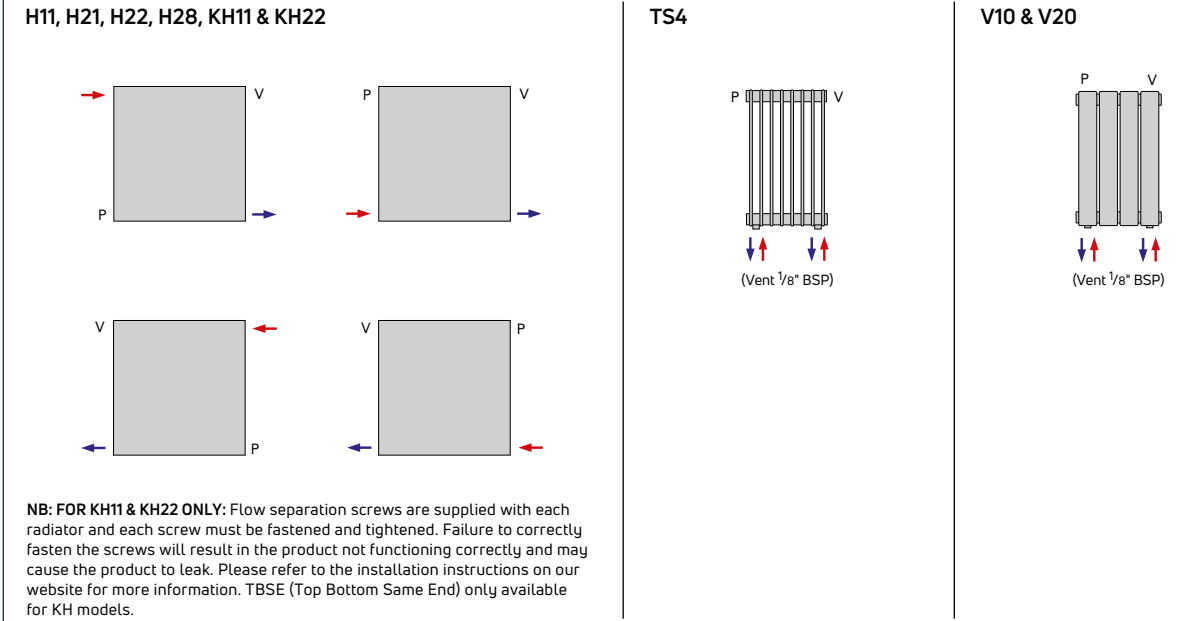

Weights & water contents per metre length

Type	Nominal Height (mm)									
	155		305		430 - 455		574 - 605		755	
	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
KH11	-	-	-	-	19.85	3.33	26.15	4.44	-	-
KH22	-	-	-	-	36.93	6.66	49.01	8.88	-	-
V10	-	-	-	-	-	-	-	-	-	-
V20	-	-	-	-	-	-	-	-	-	-
H28	10.52	2.96	21.04	5.92	-	-	-	-	-	-
H11	-	-	-	-	15.78	4.44	21.04	5.92	26.30	7.40
H21	-	-	-	-	24.78	7.80	33.04	10.40	41.30	13.00
H22	-	-	-	-	30.18	7.80	40.24	10.40	50.30	13.00
TS4	-	-	-	-	-	-	-	-	-	-


Weights & water contents per tube

Nominal Height (mm)					
1600		1800		2000	
Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)	Weight (kg)	Water Content (l)
-	-	-	-	-	-
-	-	-	-	-	-
2.63	1.08	2.93	1.19	3.23	1.30
5.03	1.97	5.63	2.20	6.23	2.42
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	2.75	1.10	3.05	1.22

n-Coefficients

Type	Nominal Height (mm)							
	155	305	430 - 455	574 - 605	755	1600	1800	2000
KH11	-	-	1.300	1.320	-	-	-	-
KH22	-	-	1.350	1.370	-	-	-	-
V10	-	-	-	-	-	1.317	1.323	1.320
V20	-	-	-	-	-	1.318	1.320	1.321
H28	1.210	1.245	-	-	-	-	-	-
H11	-	-	1.262	1.266	1.269	-	-	-
H21	-	-	1.288	1.289	1.289	-	-	-
H22	-	-	1.300	1.299	1.298	-	-	-
TS4	-	-	-	-	-	-	1.303	1.317

Mounting positions, dimensions & wall brackets - DÉCOR KH models

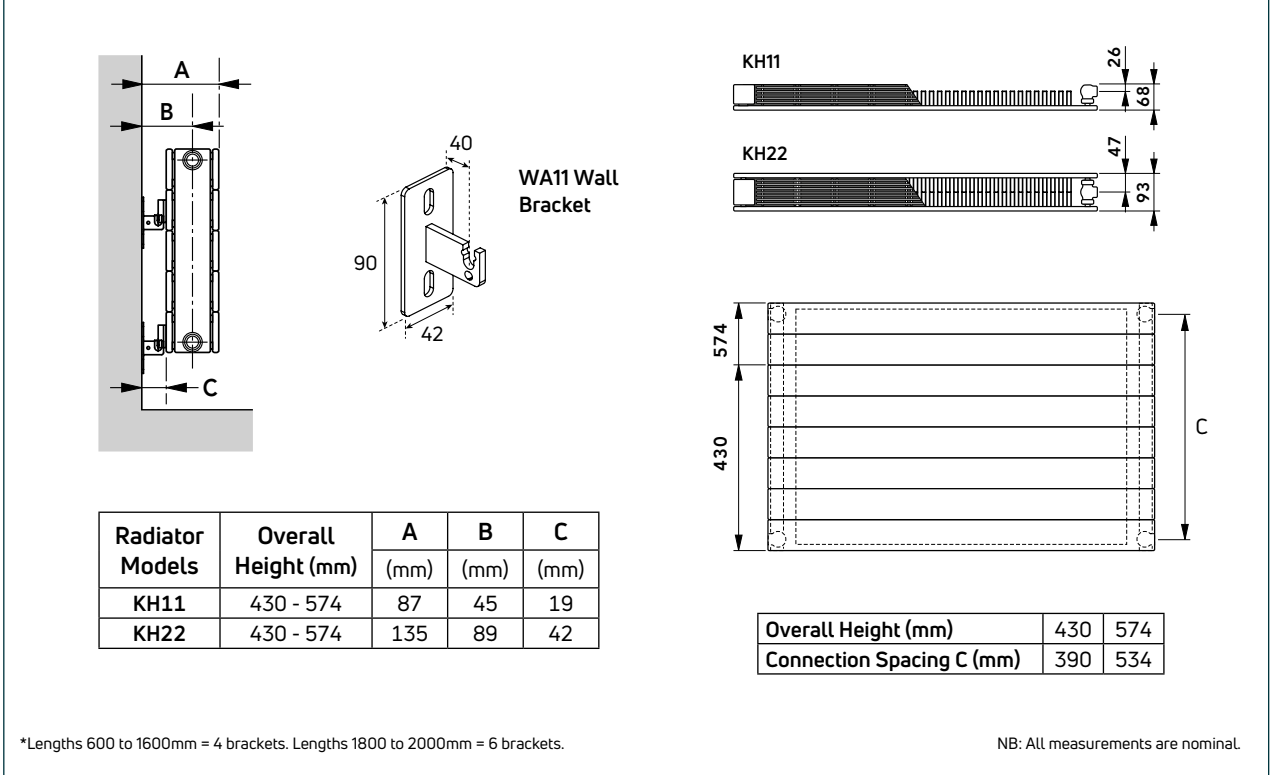


DÉCOR


Technical information (cont...)

DESIGN RADIATORS


Mounting positions, dimensions & wall brackets - DÉCOR V10 & V20 models

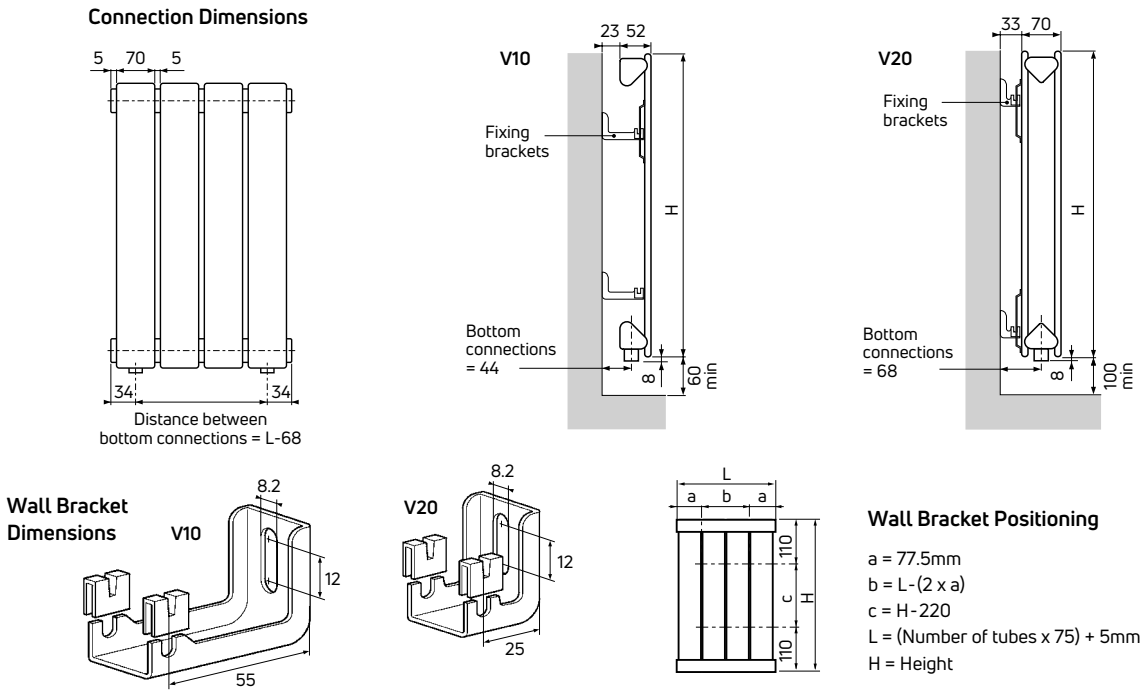


Mounting positions, dimensions & wall brackets - DÉCOR H28 floor model

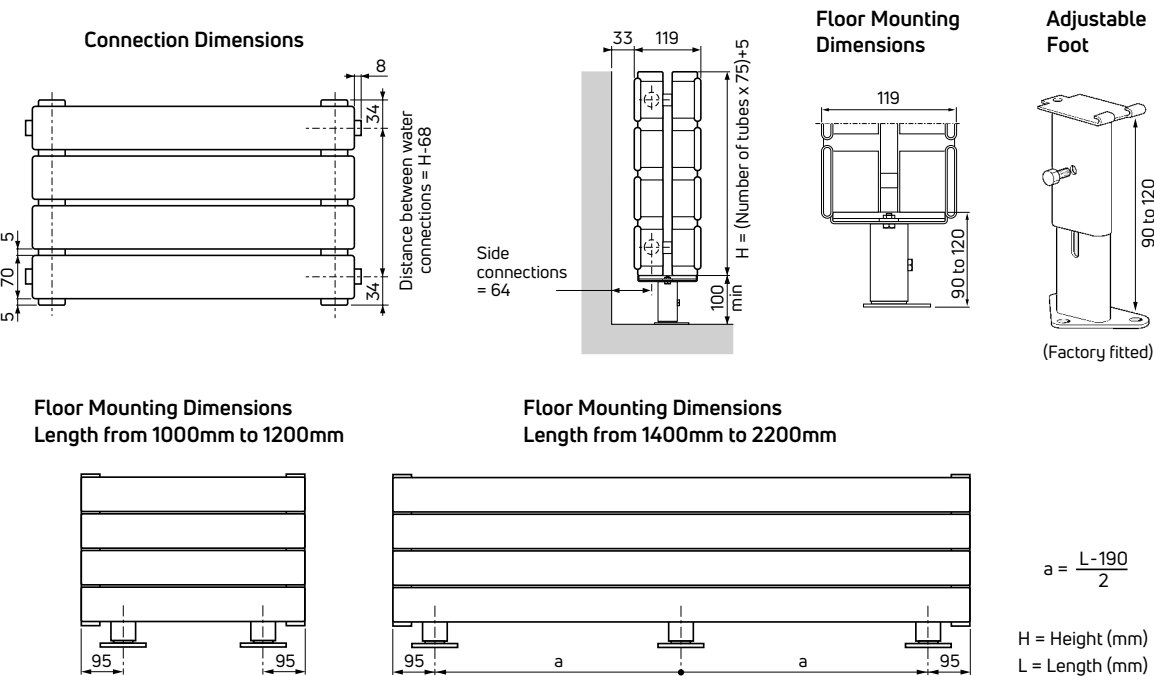

Mounting positions, dimensions & wall brackets - DÉCOR H11, H21, H22 & H28 wall models

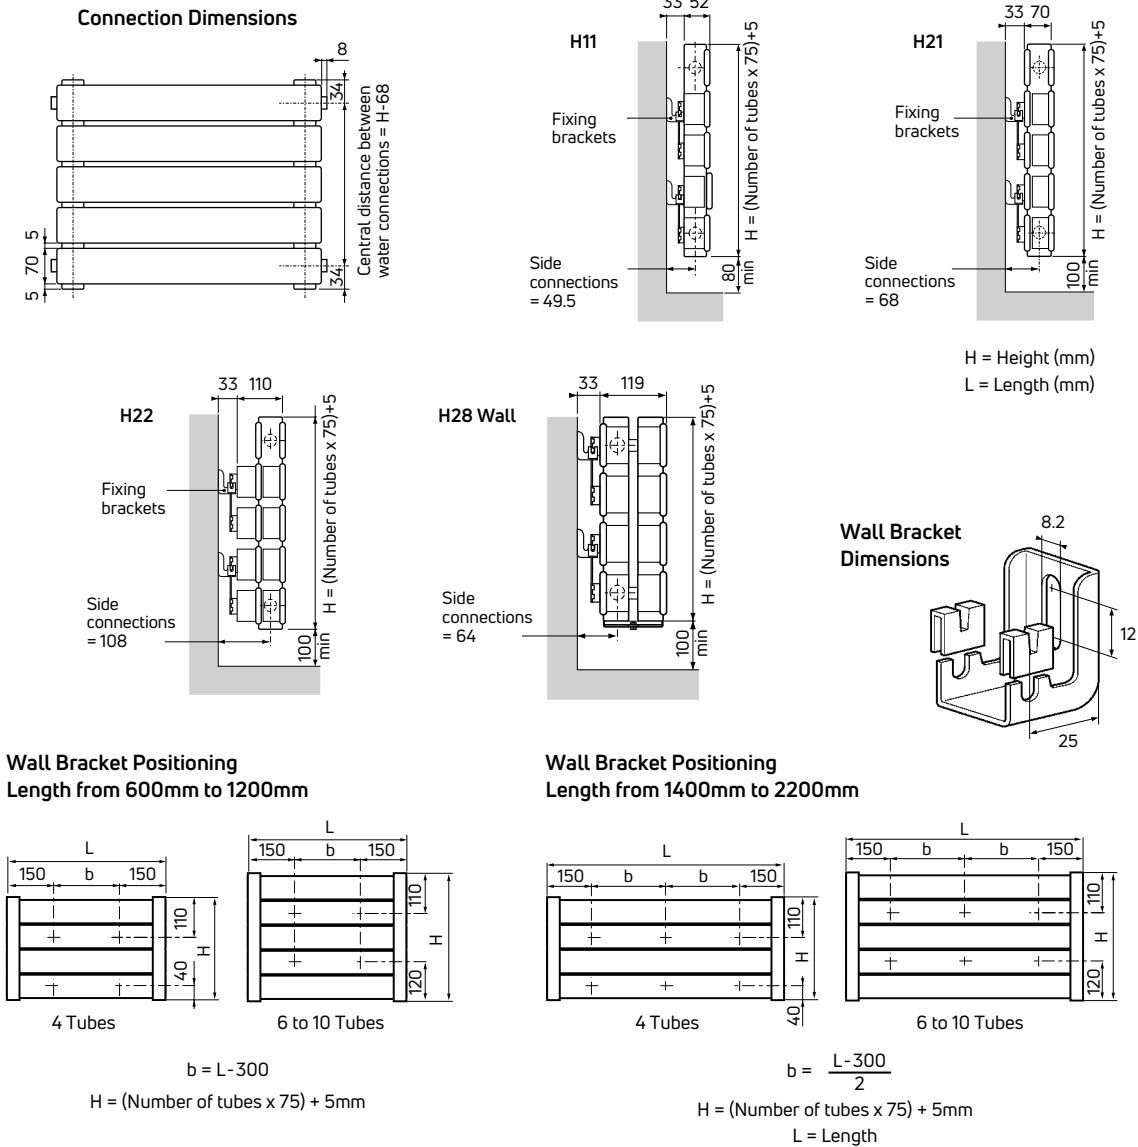

Mounting positions, dimensions & wall brackets - DÉCOR TS4 model

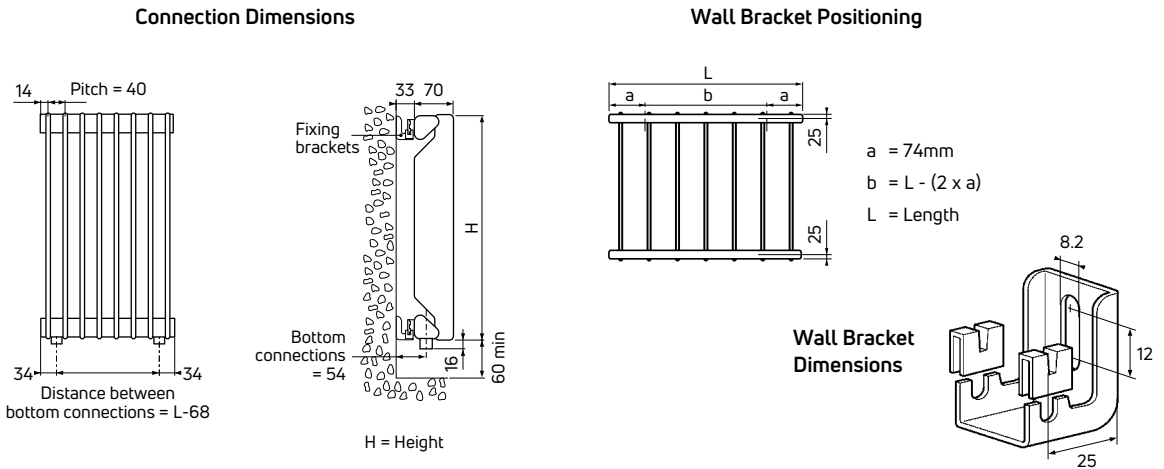

NB: All measurements are nominal.

DESIGN RADIATORS

DÉCOR

Heat outputs

DÉCOR KH11 horizontal



Nominal Height	Nominal Length (mm)	No. of Tubes
430mm	600	6
	800	6
	1000	6
	1200	6
	1400	6
	1800	6
574mm	600	8
	800	8
	1000	8
	1200	8
	1400	8
	1800	8
	2000	8

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
456	1556	235	802	KH11 0430 0600
608	2074	313	1068	KH11 0430 0800
760	2593	391	1334	KH11 0430 1000
912	3112	469	1600	KH11 0430 1200
1064	3630	547	1866	KH11 0430 1400
1368	4668	704	2402	KH11 0430 1800
553	1887	282	962	KH11 0574 0600
737	2515	376	1283	KH11 0574 0800
921	3142	470	1604	KH11 0574 1000
1105	3770	564	1924	KH11 0574 1200
1289	4398	658	2245	KH11 0574 1400
1658	5657	846	2887	KH11 0574 1800
1842	6285	940	3207	KH11 0574 2000

DÉCOR KH22 horizontal



430mm	600	6
	800	6
	1000	6
	1200	6
	1400	6
	1800	6
574mm	600	8
	800	8
	1000	8
	1200	8
	1400	8
	1800	8
	2000	8

806	2750	405	1382	KH22 0430 0600
1074	3664	540	1842	KH22 0430 0800
1343	4582	675	2303	KH22 0430 1000
1612	5500	810	2764	KH22 0430 1200
1880	6415	945	3224	KH22 0430 1400
2417	8247	1215	4146	KH22 0430 1800
955	3258	474	1617	KH22 0574 0600
1274	4347	632	2156	KH22 0574 0800
1592	5432	790	2695	KH22 0574 1000
1910	6517	948	3235	KH22 0574 1200
2229	7605	1106	3774	KH22 0574 1400
2866	9779	1422	4852	KH22 0574 1800
3184	10864	1580	5391	KH22 0574 2000

DÉCOR V10 vertical



Nominal Height	Nominal Length (mm)	No. of Tubes
1600mm	605	8
1800mm	455	6
	605	8
	755	10
2000mm	455	6
	605	8
	755	10

Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
Watts	Btu/h	Watts	Btu/h	
1056	3603	534	1822	8V10160
892	3044	451	1539	6V10180
1190	4060	602	2054	8V10180
1487	5074	752	2566	10V10180
991	3381	504	1720	6V10200
1322	4511	672	2293	8V10200
1652	5637	840	2866	10V10200


DÉCOR V20 vertical



1600mm	605	8
1800mm	455	6
	605	8
	755	10
2000mm	455	6
	605	8
	755	10

1606	5480	817	2788	8V20160
1339	4569	682	2327	6V20180
1786	6094	909	3102	8V20180
2232	7616	1136	3876	10V20180
1474	5029	750	2559	6V20200
1965	6705	1000	3412	8V20200
2456	8380	1250	4265	10V20200


DÉCOR H28 floor



155mm	1000	2
	1400	2
	1800	2
	2200	2
305mm	1000	4
	1400	4
	1800	4
	2200	4

682	2327	366	1249	2H28100
955	3258	512	1747	2H28140
1228	4190	659	2249	2H28180
1500	5118	805	2747	2H28220
1195	4077	641	2187	4H28100
1673	5708	897	3061	4H28140
2151	7339	1154	3937	4H28180
2629	8970	1410	4811	4H28220

DÉCOR H28 wall



305mm	1000	4
	1400	4
	1800	4
	2200	4

1195	4077	641	2187	4H28100W
1673	5708	897	3061	4H28140W
2151	7339	1154	3937	4H28180W
2629	8970	1410	4811	4H28220W

DÉCOR

Heat outputs (cont...)

DÉCOR H11 horizontal



Nominal Height	Nominal Length (mm)	No. of Tubes	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
			Watts	Btu/h	Watts	Btu/h	
455mm	600	6	478	1631	251	856	6H11060
	700	6	558	1904	293	1000	6H11070
	800	6	638	2177	335	1143	6H11080
	900	6	717	2446	376	1283	6H11090
	1000	6	797	2719	419	1430	6H11100
	1200	6	956	3262	503	1716	6H11120
	1400	6	1116	3808	587	2003	6H11140
	1600	6	1275	4350	670	2286	6H11160
	1800	6	1435	4896	754	2573	6H11180
	2000	6	1594	5439	838	2859	6H11200
605mm	600	8	602	2054	317	1082	8H11060
	700	8	702	2395	370	1262	8H11070
	800	8	802	2736	422	1440	8H11080
	900	8	903	3081	475	1621	8H11090
	1000	8	1003	3422	528	1802	8H11100
	1200	8	1204	4108	634	2163	8H11120
	1400	8	1404	4790	739	2521	8H11140
	1600	8	1605	5476	845	2883	8H11160
	1800	8	1805	6159	950	3241	8H11180
	2000	8	2006	6844	1056	3603	8H11200
755mm	600	10	721	2460	379	1293	10H11060
	700	10	841	2869	442	1508	10H11070
	800	10	962	3282	506	1726	10H11080
	900	10	1082	3692	569	1941	10H11090
	1000	10	1202	4101	632	2156	10H11100
	1200	10	1442	4920	758	2586	10H11120
	1400	10	1683	5742	885	3020	10H11140
	1600	10	1923	6561	1011	3450	10H11160
	1800	10	2164	7384	1138	3883	10H11180
	2000	10	2404	8202	1264	4313	10H11200

DÉCOR H21 horizontal



455mm	600	6	678	2313	355	1211	6H21060*
	700	6	791	2699	414	1413	6H21070*
	800	6	904	3084	473	1614	6H21080*
	900	6	1017	3470	532	1815	6H21090*
	1000	6	1130	3856	591	2016	6H21100*
	1200	6	1356	4627	709	2419	6H21120*
	1400	6	1582	5398	827	2822	6H21140*
	1600	6	1808	6169	946	3228	6H21160*
	1800	6	2034	6940	1064	3630	6H21180*
	2000	6	2260	7711	1182	4033	6H21200*
605mm	600	8	833	2842	435	1484	8H21060*
	700	8	972	3316	508	1733	8H21070*
	800	8	1110	3787	580	1979	8H21080*
	900	8	1249	4262	653	2228	8H21090*
	1000	8	1388	4736	725	2474	8H21100*
	1200	8	1666	5684	870	2968	8H21120*
	1400	8	1943	6630	1015	3463	8H21140*
	1600	8	2221	7578	1160	3958	8H21160*
	1800	8	2498	8523	1305	4453	8H21180*
	2000	8	2776	9472	1450	4947	8H21200*

*Non-stock - made to order only.


DÉCOR H21 horizontal (cont...)



Nominal Height	Nominal Length (mm)	No. of Tubes	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
			Watts	Btu/h	Watts	Btu/h	
755mm	600	10	978	3337	511	1744	10H21060*
	700	10	1141	3893	596	2034	10H21070*
	800	10	1304	4449	682	2327	10H21080*
	900	10	1467	5005	767	2617	10H21090*
	1000	10	1630	5562	852	2907	10H21100*
	1200	10	1956	6674	1022	3487	10H21120*
	1400	10	2282	7786	1193	4071	10H21140*
	1600	10	2608	8898	1363	4651	10H21160*
	1800	10	2934	10011	1534	5234	10H21180*
	2000	10	3260	11123	1704	5814	10H21200*


*Non-stock - made to order only.

DÉCOR H22 horizontal



455mm	600	6	833	2842	433	1477	6H22060
	700	6	972	3316	505	1723	6H22070
	800	6	1110	3787	578	1972	6H22080
	900	6	1249	4262	650	2218	6H22090
	1000	6	1388	4736	722	2463	6H22100
	1200	6	1666	5684	866	2955	6H22120
	1400	6	1943	6630	1011	3450	6H22140
	1600	6	2221	7578	1155	3941	6H22160
	1800	6	2498	8523	1300	4436	6H22180
	2000	6	2776	9472	1444	4927	6H22200
605mm	600	8	1027	3504	534	1822	8H22060
	700	8	1198	4088	623	2126	8H22070
	800	8	1369	4671	712	2429	8H22080
	900	8	1540	5254	801	2733	8H22090
	1000	8	1711	5838	890	3037	8H22100
	1200	8	2053	7005	1068	3644	8H22120
	1400	8	2395	8172	1246	4251	8H22140
	1600	8	2738	9342	1424	4859	8H22160
	1800	8	3080	10509	1602	5466	8H22180
	2000	8	3422	11676	1780	6073	8H22200
755mm	600	10	1206	4115	628	2143	10H22060
	700	10	1407	4801	732	2498	10H22070
	800	10	1608	5486	837	2856	10H22080
	900	10	1809	6172	941	3211	10H22090
	1000	10	2010	6858	1046	3569	10H22100
	1200	10	2412	8230	1255	4282	10H22120
	1400	10	2814	9601	1464	4995	10H22140
	1600	10	3216	10973	1674	5712	10H22160
	1800	10	3618	12345	1883	6425	10H22180
	2000	10	4020	13716	2092	7138	10H22200

DÉCOR TS4




1800mm	308	8	832	2839	423	1443	8TS4180
	428	11	1144	3903	581	1982	11TS4180
	508	13	1352	4613	687	2344	13TS4180
	628	16	1664	5678	845	2883	16TS4180
2000mm	308	8	936	3194	480	1638	8TS4200
	428	11	1287	4391	660	2252	11TS4200
	508	13	1521	5190	780	2661	13TS4200
	628	16	1872	6387	960	3276	16TS4200



OPUS is a contemporary round tube radiator. It has a simple, yet sleek design that blends effortlessly into its surrounding. It is a stylish and functional radiator, with high heat outputs, and comes in a range of sizes and models. Standard colour is an attractive white (RAL 9016) but other colour options are available, see page 258.

- OPUS is available in eight different sizes
- Widths range from 324mm - 1000mm
- Heights vary from 468mm - 2000mm

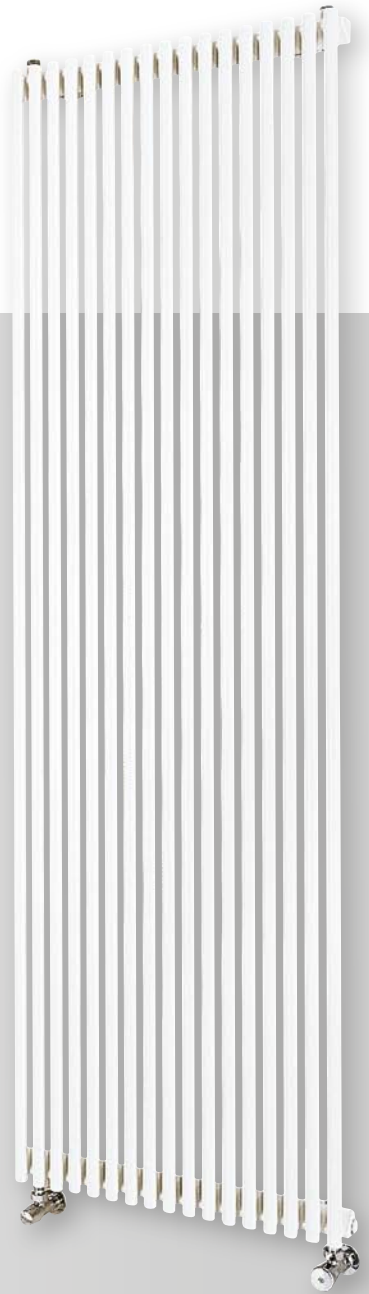

OPUS VERTICAL



OPUS HORIZONTAL


OPUS

OPUS

General specification & technical information

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Standard stocked finish is white (RAL 9016). For other special colour options please see page 258.
- MATERIAL**
Manufactured from steel.
- SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.

- CONNECTIONS**
Vertical: 6 x 1/2" BSP. Horizontal: 4 x 1/2" BSP.
- AIR VENTS**
Included in the packaging.
- OPERATING PRESSURES**
Tested to a pressure of 13 bar.
Working pressure of up to 10 bar.
- OPERATING TEMPERATURE**
Maximum 100°C.
- DELIVERY**
Non-stocked item: 4 - 6 weeks.
- VALVES**
Please see page 219.


For more general information, please see page 256.

Weights & water contents per metre length

Type	Weight (kg)	Water Content (l)
MEZV1	14.49	6.93
MEZV2	20.93	10.01
MEZV3	27.37	13.09
MEZV4	33.81	16.17
MEZH1	7.20	3.32
MEZH2	9.28	4.34
MEZH3	12.01	5.54
MEZH4	15.38	7.24

Fitting the insert into the baffle


(where indicated with a on the connection options diagrams below)

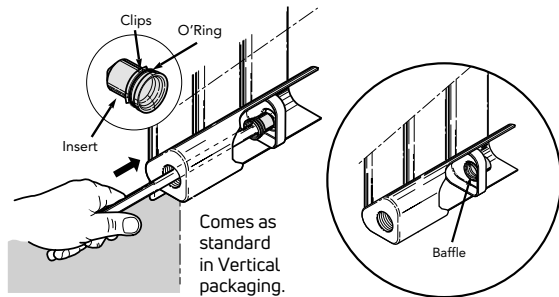


Connection options

6 x 1/2" BSP


Vertical
(Universal Connection)



Vertical connection options without the need for an insert

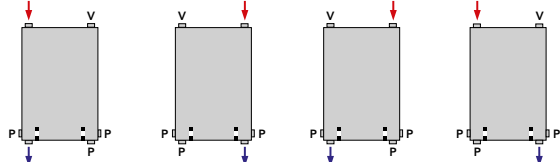


Vertical connection options which require an insert

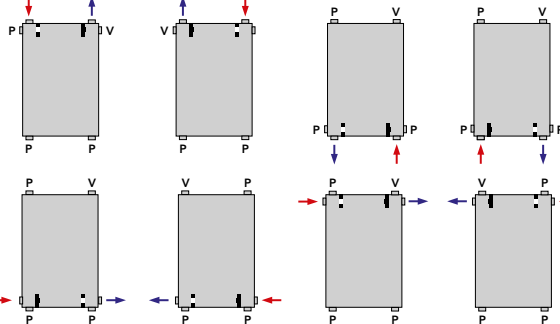

4 x 1/2" BSP

Horizontal




Key


- Baffle Without Insert
- Baffle With Insert (manual insertion required on universal connections - see above)

Mounting positions, dimensions & wall brackets

OPUS Horizontal

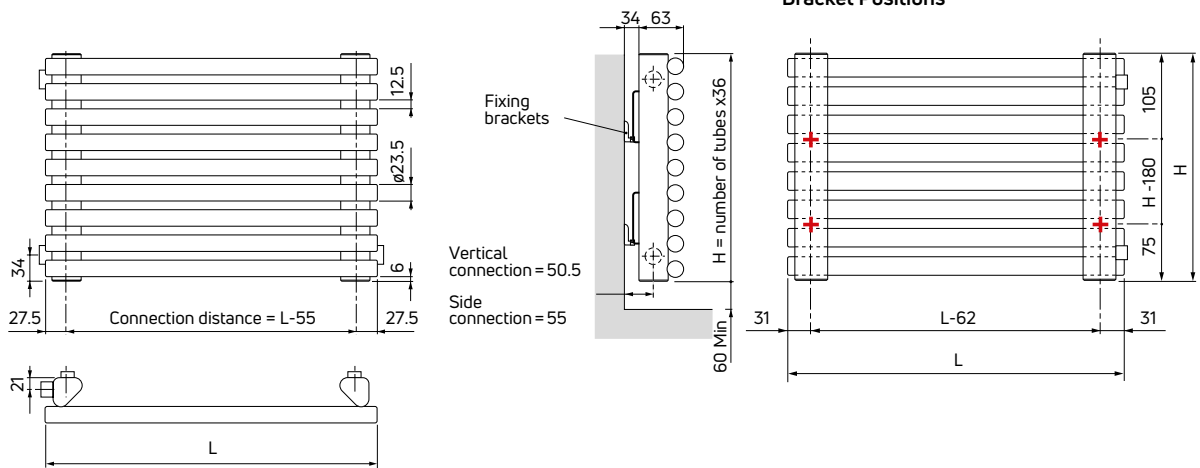

OPUS Vertical

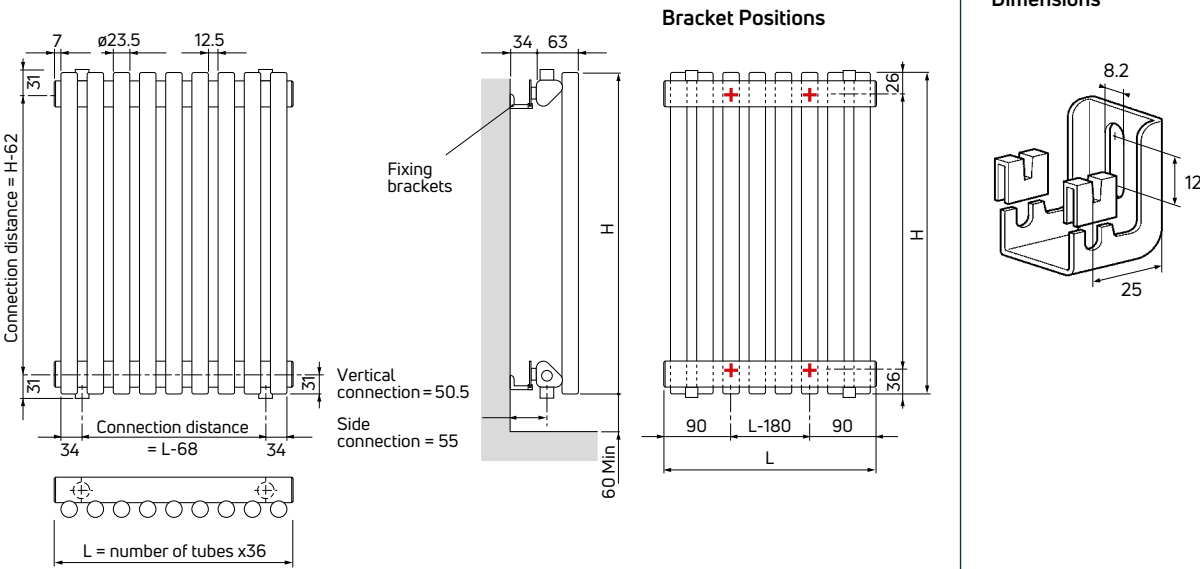

NB: All measurements are nominal.

Heat outputs

OPUS vertical

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	No. of Tubes	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		n-Coefficients
				Watts	Btu/h	Watts	Btu/h	
MEZV1	2000	324	9	803	2740	413	1409	1.304
MEZV2	2000	468	13	1160	3958	596	2034	1.304
MEZV3	2000	612	17	1516	5173	779	2658	1.304
MEZV4	2000	756	21	1873	6391	1146	3910	1.304

OPUS horizontal

MEZH1	468	600	13	403	1375	212	723	1.258
MEZH2	612	600	17	516	1761	271	925	1.262
MEZH3	468	1000	13	672	2293	353	1204	1.258
MEZH4	612	1000	17	860	2934	451	1539	1.262



Towel warmers

MYSON has over 60 years of manufacturing expertise. We have applied our knowledge and experience to create a range of stylish yet practical towel warmers. Our extensive range covers all tastes and aspirations and includes functional ladder rails, striking contemporary designs and elegant traditional styles. Popular products, such as AVONMORE, are ideal for domestic and commercial projects alike, whilst combination products such as DEE, combine the benefits of a radiator and a towel warmer.



MYSON has a range of contemporary towel warmers that will add style, vibrancy and a bit of a wow factor to your bathroom. Our products have been expertly designed to look great, as well as serve as highly functional heat emitters. Our range is extremely diverse, from intricate masterpieces to stunningly simple designs, we're confident there is something for everyone. Most of our products come in a choice of finish, and several ranges are available in selected RAL colours, special textured, metallic and shimmer metallic finishes.

- Our contemporary collection is so versatile there is something to suit any bathroom
- Products like TOPAZ, FATALA and KASAI can be used as bathroom radiators to warm towels or to add style to a living room or bedroom
- We also have a range of contemporary electric towel warmers, see pages 210 - 215 for details



CONTEMPORARY TOWEL WARMERS



NEW!

TOPAZ


The new double TOPAZ bathroom radiator from MYSON provides excellent heat output, thanks to its generous tubular water channels. It is the perfect specification towel radiator for low temperature heating systems. TOPAZ is available in a wide choice of sizes, finished in White, Anthracite, Silver or Matt Black. The contemporary and practical range will add style, vibrancy and a bit of wow to any bathroom.

Choose from a range of decorative valves to complement TOPAZ.



RAL 7016 Anthracite

Dimensions

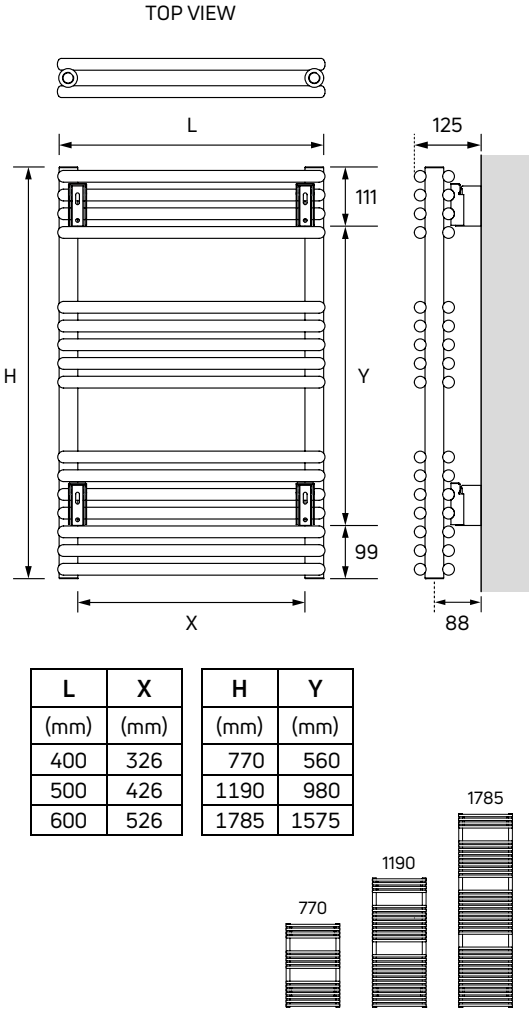

Weights, water contents & n-coefficients

Model (H/L)	Weight (kg)	Water Content (l)	n-Coefficient
770/400	14.00	5.10	1.2120
770/500	15.64	6.32	1.2104
770/600	18.24	7.53	1.2093
1190/400	21.00	7.55	1.2388
1190/500	23.56	8.99	1.2302
1190/600	27.48	10.44	1.2245
1785/400	29.80	11.60	1.2767
1785/500	35.83	15.57	1.2582
1785/600	41.86	19.54	1.2461

Technical information & heat outputs


Order Code (Type - Double)				Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
White	Anthracite	Matt Black	Silver			Watts	Btu/h	Watts	Btu/h
TPZD770400	TPZD7704007016	TPZD7704009005	TPZD770400SILV	770	400	513	1750	276	942
TPZD770500	TPZD7705007016	TPZD7705009005	TPZD770500SILV	770	500	639	2180	344	1174
TPZD770600	TPZD7706007016	TPZD7706009005	TPZD770600SILV	770	600	766	2614	413	1409
TPZD1190400	TPZD11904007016	TPZD11904009005	TPZD1190400SILV	1190	400	740	2525	393	1341
TPZD1190500	TPZD11905007016	TPZD11905009005	TPZD1190500SILV	1190	500	920	3139	490	1672
TPZD1190600	TPZD11906007016	TPZD11906009005	TPZD1190600SILV	1190	600	1099	3750	588	2006
TPZD1785400	TPZD17854007016	TPZD17854009005	TPZD1785400SILV	1785	400	1097	3743	571	1948
TPZD1785500	TPZD17855007016	TPZD17855009005	TPZD1785500SILV	1785	500	1340	4572	705	2405
TPZD1785600	TPZD17856007016	TPZD17856009005	TPZD1785600SILV	1785	600	1584	5405	838	2859


General specification

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- CONNECTIONS**
2 x 1/2" BSP as standard.
- AIR VENTS**
Integrated, bottom-opposite-end connection.
- OPERATING PRESSURES**
Tested to a pressure of 5.4 bar. Working pressure of up to 4 bar.
- OPERATING TEMPERATURE**
Maximum hot water temperature 100°C.
- DELIVERY**
Non-stocked item: 4 - 6 weeks.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Available in White (RAL 9016), Anthracite (RAL 7016), Matt Black (RAL 9005) or Silver. Other colours available to order.
- MATERIAL**
Manufactured from steel.
- SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.

For more general information, please see page 256.


Made to order colours

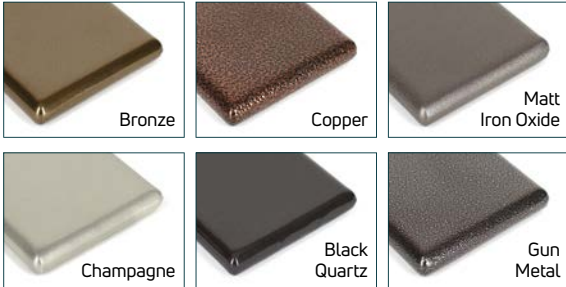




FATALA


Introduce contemporary elegance into your home with FATALA. Its attractive yet simple asymmetric design is both stylish and practical and will add a fresh modern look to a bathroom or living room. It's available in white or your choice of RAL colour as well as our special textured, metallic or shimmer metallic finishes.

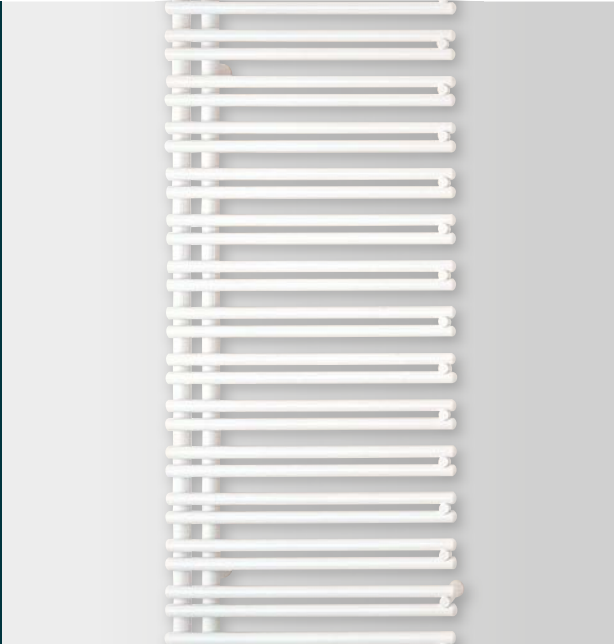














INTERLUDE

INTERLUDE is a simple and elegant flat tube radiator. It is manufactured from quality steel and has a sleek and streamlined appearance. It is both practical and attractive and is available in selected RAL, metallic or special metallic finishes.



General specification

- **CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- **ACCESSORIES**
Please see page 138.
- **SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.
- **CONNECTIONS**
2 x ½" BSP as standard.
- **AIR VENTS**
Included in the packaging.
- **OPERATING PRESSURES**
Tested to a pressure of 13 bar. Working pressure of up to 10 bar.
- **GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- **COLOUR**
Finished in white (RAL 9016) or selected RAL, textured, metallic or shimmer metallic colours. Please see page 258.
- **MATERIAL**
Manufactured from steel.
- **DELIVERY**
Non-stocked item: 4 - 6 weeks.

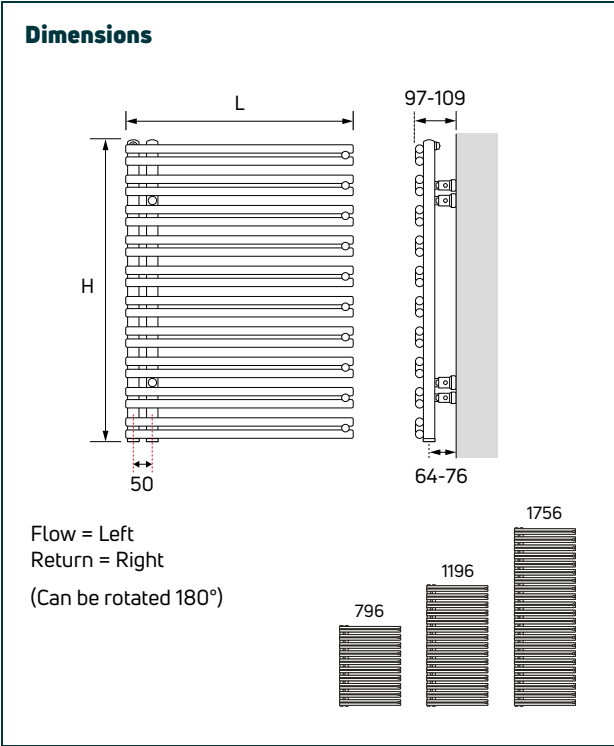












For more general information, please see page 256.

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
MAE1	796	500	446	1522	243	829
MAE2	1196	500	650	2218	352	1201
MAE3	1756	500	897	3061	476	1624

General specification

- **CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- **CONNECTIONS**
2 x ½" BSP as standard.
- **AIR VENTS**
Included in the packaging.
- **OPERATING PRESSURES**
Tested to a pressure of 5.2 bar. Working pressure of up to 4 bar.
- **DUAL FUEL**
ECO450 dual fuel heater kit available for INT2 & INT3 only. Please see page 138.
- **DELIVERY**
Stocked items (white/RAL 9006): 2 - 5 working days. Non-stocked items (colour): 4 - 6 weeks.
- **GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- **COLOUR**
Finished in white (RAL 9016) or selected RAL, textured, metallic or shimmer metallic colours. Please see page 258.
- **MATERIAL**
Manufactured from steel.
- **SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.
- For more general information, please see page 256.

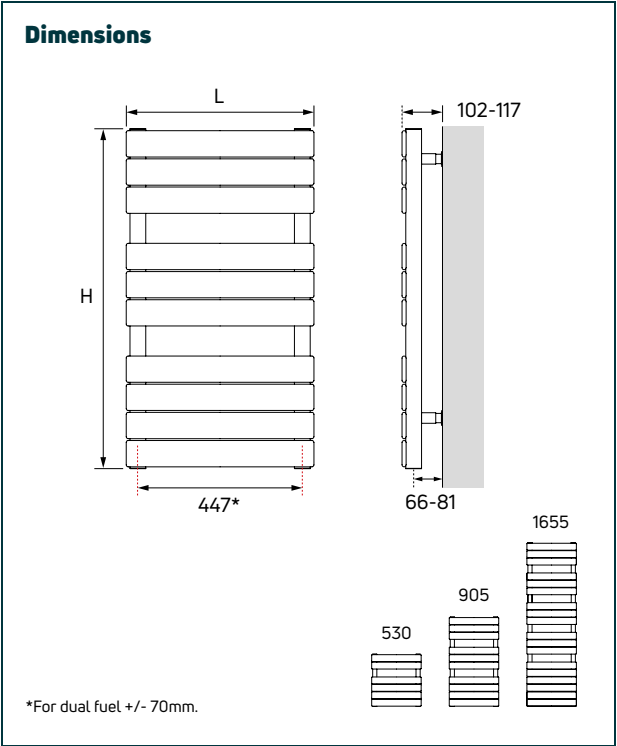

Weights, water contents & n-coefficients



Model	Weight (kg)	Water Content (l)	n-Coefficient
INT1	9.31	2.9	1.190
INT2	13.68	4.8	1.205
INT3	19.86	8.6	1.227

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
INT1	530	500	295	1007	161	549	-
INT2	905	500	470	1604	254	867	450
INT3	1655	500	817	2788	435	1484	450



Dimensions

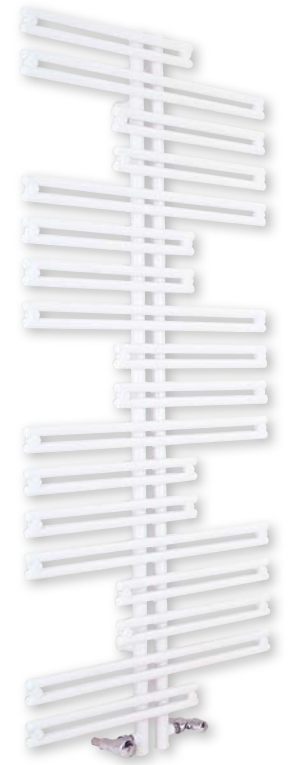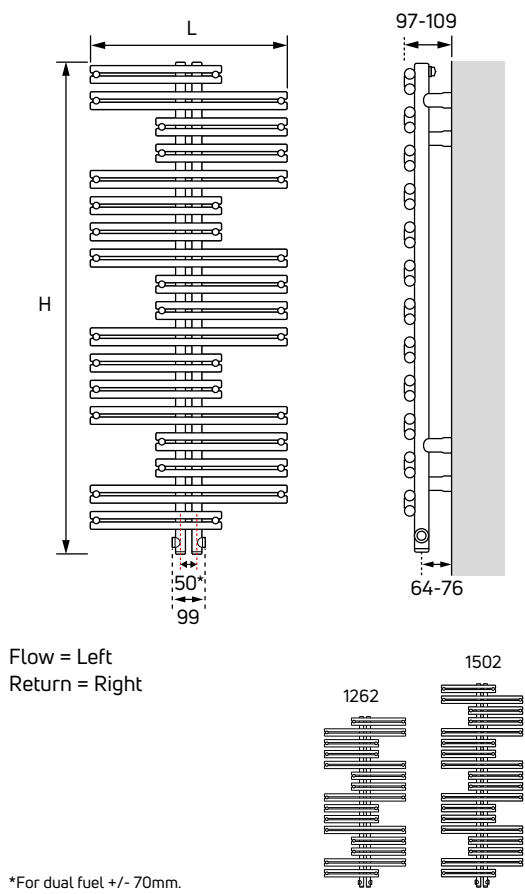

RAL 9016
Traffic White

Weights, water contents & n-coefficients

Model	Weight (kg)	Water Content (l)	n-Coefficient
CAP1	13.30	5.30	1.253
CAP2	16.00	6.10	1.247

General specification

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016) or selected RAL, textured, metallic or shimmer metallic colours. Please see page 258.
- MATERIAL**
Manufactured from steel.
- ACCESSORIES**
Please see page 138.
- SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.

- CONNECTIONS**
4 x ½" BSP as standard - side or bottom connection possibilities.
- AIR VENTS**
Included in the packaging.
- OPERATING PRESSURES**
Tested to a pressure of 13 bar. Working pressure of up to 10 bar.
- DUAL FUEL**
ECO450 dual fuel heater kit available. Please see page 138.
- DELIVERY**
Non-stocked item: 4 - 6 weeks.

For more general information, please see page 256.

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
CAP1	1262	600	613	2092	323	1102	450
CAP2	1502	600	724	2470	383	1307	450




MARANOA

MARANOA has an attractive asymmetric design that uses blocks and spaces to create a distinctive appearance. The large flat tubes are both stylish and practical and, with left or right hand mounting options, it offers flexibility in any project. MARANOA is available in selected RAL, metallic or special metallic finishes.



RAL 9006
White Aluminium

Dimensions

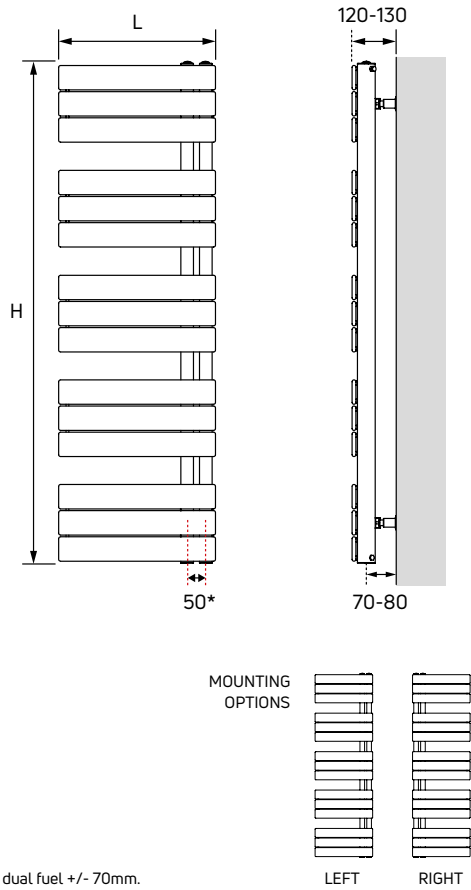

*For dual fuel +/- 70mm.



RAL 9016
Traffic White

Weights, water contents & n-coefficients

Model	Weight (kg)	Water Content (l)	n-Coefficient
CH02	21.28	8.5	1.272

General specification

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016) or selected RAL, textured, metallic or shimmer metallic colours. Please see page 258.
- MATERIAL**
Manufactured from steel.
- SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.

- CONNECTIONS**
2 x 1/2" BSP as standard.
- AIR VENTS**
Integrated.
- OPERATING PRESSURES**
Tested to a pressure of 5.2 bar. Working pressure of up to 4 bar.
- DUAL FUEL**
ECO450 dual fuel heater kit available. Please see page 138.
- DELIVERY**
Non-stocked item: 4 - 6 weeks.

For more general information, please see page 256.

Technical information & heat outputs


Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
CH02	1430	600	855	2917	446	1522	450



MERSEY


MERSEY is an extremely functional radiator. It combines all the advantages of a PREMIER HE radiator and towel warmer for a truly practical design. It is manufactured from high quality brass with an attractive polished chrome plated finish. MERSEY is ideal for use not just in bathrooms but also kitchens, cloakrooms and other small areas.














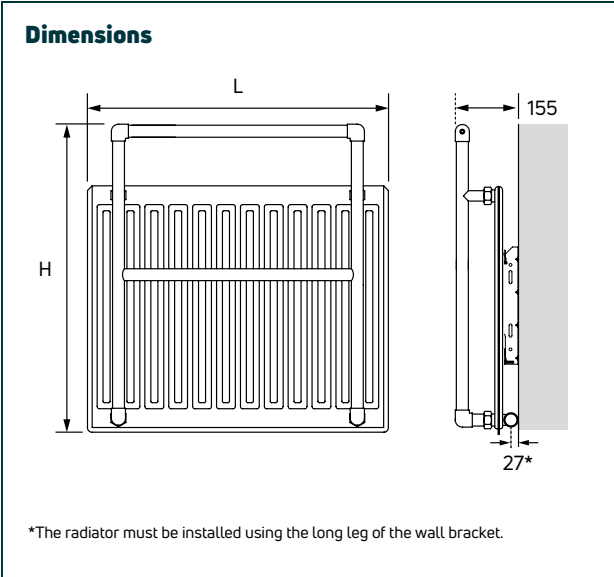
OUSE

OUSE is a highly practical combination radiator. At its centre is a PREMIER HE radiator that produces high heat outputs. This is surrounded by a functional round tube frame that is manufactured from high quality brass and has an attractive polished chrome plated finish.



General specification

- **CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- **SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.
- **CONNECTIONS**
2 x ½" BSP as standard.
- **AIR VENTS**
Integrated.
- **OPERATING PRESSURES**
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- **DELIVERY**
2 - 5 working days.
- **GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- **COLOUR**
Frame finished in chrome. Radiator in white (RAL 9016).
- **MATERIAL**
Frame manufactured from brass. Radiator manufactured from steel.



For more general information, please see page 256.

Weights











Model	Weight (kg)
MTR2	11.10
MTR4	15.10


Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
MTR2	655	640	385*	1314*	208*	709*
MTR4	809	745	564*	1924*	295*	1007*

*Outputs NPD, see page 257.

General specification

- **CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- **ACCESSORIES**
Sleeving kit available. Please see page 138.
- **SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.
- **CONNECTIONS**
2 x ½" BSP as standard.
- **AIR VENTS**
Integrated.
- **OPERATING PRESSURES**
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- **DELIVERY**
2 - 5 working days.
- **GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- **COLOUR**
Frame finished in chrome. Radiator in white (RAL 9016).
- **MATERIAL**
Frame manufactured from brass. Radiator manufactured from steel.

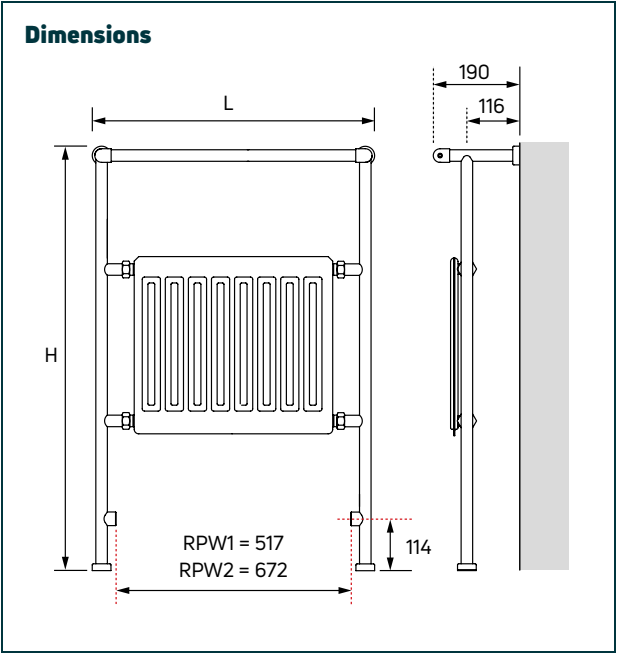

For more general information, please see page 256.

Weights & n-coefficients

Model	Weight (kg)	n-Coefficient
RPW1	10.90	1.212
RPW2	12.40	1.212

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
RPW1	934	622	290	989	156	532
RPW2	934	777	359	1225	193	659

TOWEL WARMERS



SOKOTO

SOKOTO is a stylish and distinctive combination radiator. It is highly practical, with a flat tube DÉCOR radiator at its centre, giving it not only high heat outputs, but an attractive appearance. The outer rail is manufactured from high quality brass with an attractive polished chrome plated finish which gives it a truly modern feel.



TOWEL WARMERS





STOUR


STOUR is a beautifully simple frame and rail design that will look classy and elegant in any bathroom. Its round tubes are manufactured from quality brass with a highly polished chrome finish.





General specification


- 


CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- 


ACCESSORIES
Sleeving kit available. Please see page 138.
- 


SYSTEM
2 pipe pumped indirect domestic and commercial heating applications.
- 


CONNECTIONS
2 x 1/2" BSP as standard.
- 

AIR VENTS
Integrated.
- 


OPERATING PRESSURES
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- 

DELIVERY
2 - 5 working days.
- 


GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.
- 


COLOUR
Frame finished in chrome. Radiator in white (RAL 9016).
- 


MATERIAL
Frame manufactured from brass. Radiator manufactured from steel.

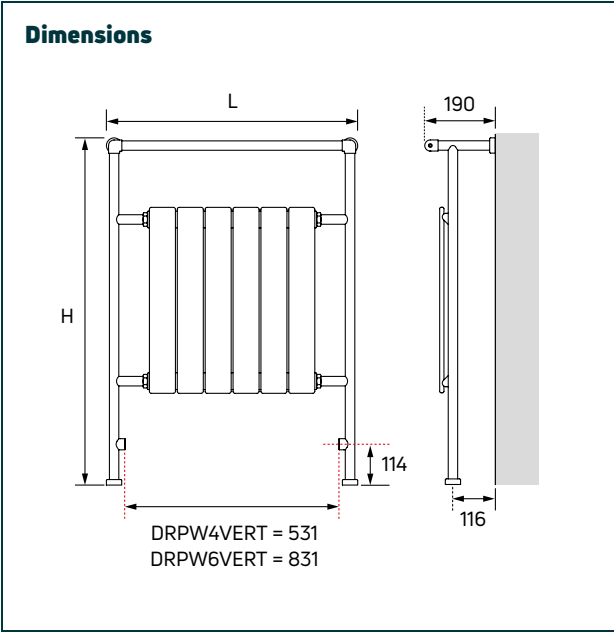



General specification


- 


CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- 


SYSTEM (DIRECT)
Suitable for direct systems. Please refer to page 257 for information on dezincification.
- 


CONNECTIONS
2 x 1/2" BSP as standard.
- 


AIR VENTS
Integrated.
- 


OPERATING PRESSURES
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- 


DUAL FUEL
PTC dual fuel heater kit options available. Please see table below or page 138.
- 

APM* TECHNOLOGY
PTC heater kit comes with APM* technology. Please see page 257.
- 


DELIVERY
2 - 5 working days.
- 

GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.
- 

COLOUR
Finished in chrome.
- 

MATERIAL
Manufactured from brass.
- 

SYSTEM (INDIRECT)
2 pipe pumped indirect domestic and commercial heating applications.

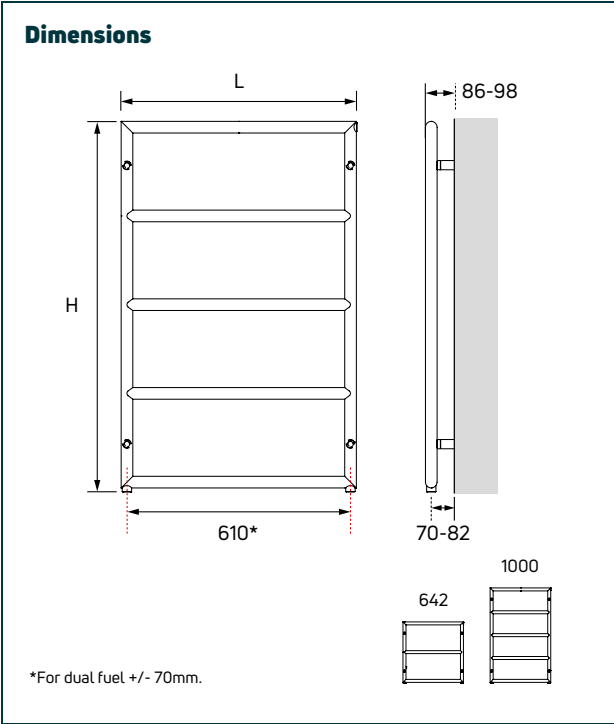

For more general information, please see page 256.

Dual fuel heater kits

Model	Dual Fuel Order Code
BEA1	PTC75
BEA6	PTC150

Weights

Model	Weight (kg)
BEA1	5.20
BEA6	7.60

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
BEA1	642	642	193*	659*	104*	356*	75
BEA6	1000	642	274*	935*	148*	505*	150

*Outputs NPD, see page 257.

For more general information, please see page 256.

Weights & n-coefficients

Model	Weight (kg)	n-Coefficient
DRPW4VERT	13.70	1.224
DRPW6VERT	18.80	1.224

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
DRPW4VERT	934	636	387	1320	207	706
DRPW6VERT	934	936	559	1907	299	1020

MYSON has a range of traditional towel warmers that will give your bathroom a classic, vintage and elegant feel. From simple rails to more elaborate designs, there is something for everyone. Our traditional range is manufactured from the highest quality brass and all come with a beautiful, highly polished chrome finish that will add a touch of class to any bathroom. We also offer a range of accessories that complement the range and add the finishing touch, see page 138.

- Our traditional collection offers varied designs and includes both wall and floor mounted models
- There are combination products, such as DEE, that offer high heat outputs as well as traditional design
- Wow factor products, such as BUTTERMERE and AWE will stand out in any traditional bathroom design



TRADITIONAL TOWEL WARMERS



AWE

AWE is an attractive and distinguished design. It is a floor standing towel warmer that will make a very stylish addition to any bathroom. It is manufactured from quality brass with a highly polished chrome plated finish which will create a focal point in any bathroom.



BUTTERMERE


BUTTERMERE is a classic floor standing design that is guaranteed to add a strong, traditional feel to a bathroom. Its double-sided, curved shape and timeless look is both stylish and practical. It is manufactured from quality brass with a highly polished chrome plated finish which will create a focal point in any bathroom.



General specification

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- CONNECTIONS**
2 x 1/2" BSP as standard.
- AIR VENTS**
Integrated.
- OPERATING PRESSURES**
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- DUAL FUEL**
PTC200 dual fuel heater kit available. Please see page 138.
- APM* TECHNOLOGY**
PTC heater kit comes with APM* technology. Please see page 257.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in chrome.
- MATERIAL**
Manufactured from brass.
- ACCESSORIES**
Please see page 138.
- SYSTEM (INDIRECT)**
2 pipe pumped indirect domestic and commercial heating applications.
- SYSTEM (DIRECT)**
Suitable for direct systems. Please refer to page 257 for information on dezincification.
- DELIVERY**
2 - 5 working days.
- VALVES**
Please see page 228.
- For more general information, please see page 256.

Dimensions

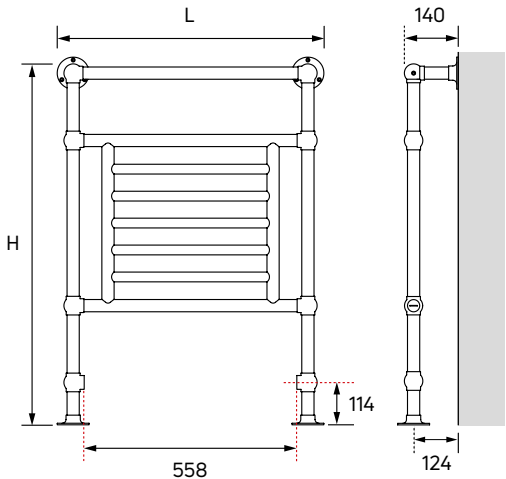

Weight & n-coefficient

Model	Weight (kg)	n-Coefficient
B27/1	10.50	1.240


Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
B27/1	955	693	223	761	118	403	200

General specification

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- CONNECTIONS**
2 x 1/2" BSP as standard.
- AIR VENTS**
Integrated.
- OPERATING PRESSURES**
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- DELIVERY**
2 - 5 working days.
- VALVES**
Please see page 228.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in chrome.
- MATERIAL**
Manufactured from brass.
- ACCESSORIES**
Please see page 138.
- SYSTEM (INDIRECT)**
2 pipe pumped indirect domestic and commercial heating applications.
- SYSTEM (DIRECT)**
Suitable for direct systems. Please refer to page 257 for information on dezincification.
- For more general information, please see page 256.

Dimensions

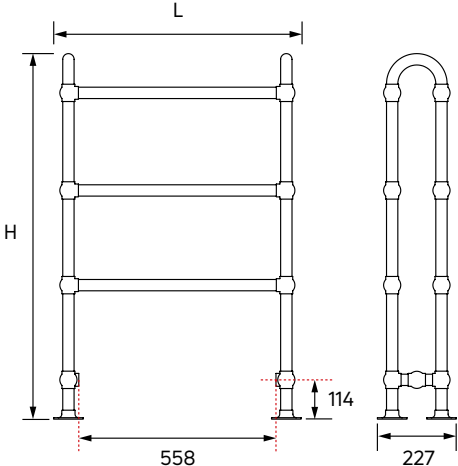


Weight & n-coefficient

Model	Weight (kg)	n-Coefficient
B30	15.10	1.190

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C	
			Watts	Btu/h	Watts	Btu/h
B30	1026	693	325	1109	177	604

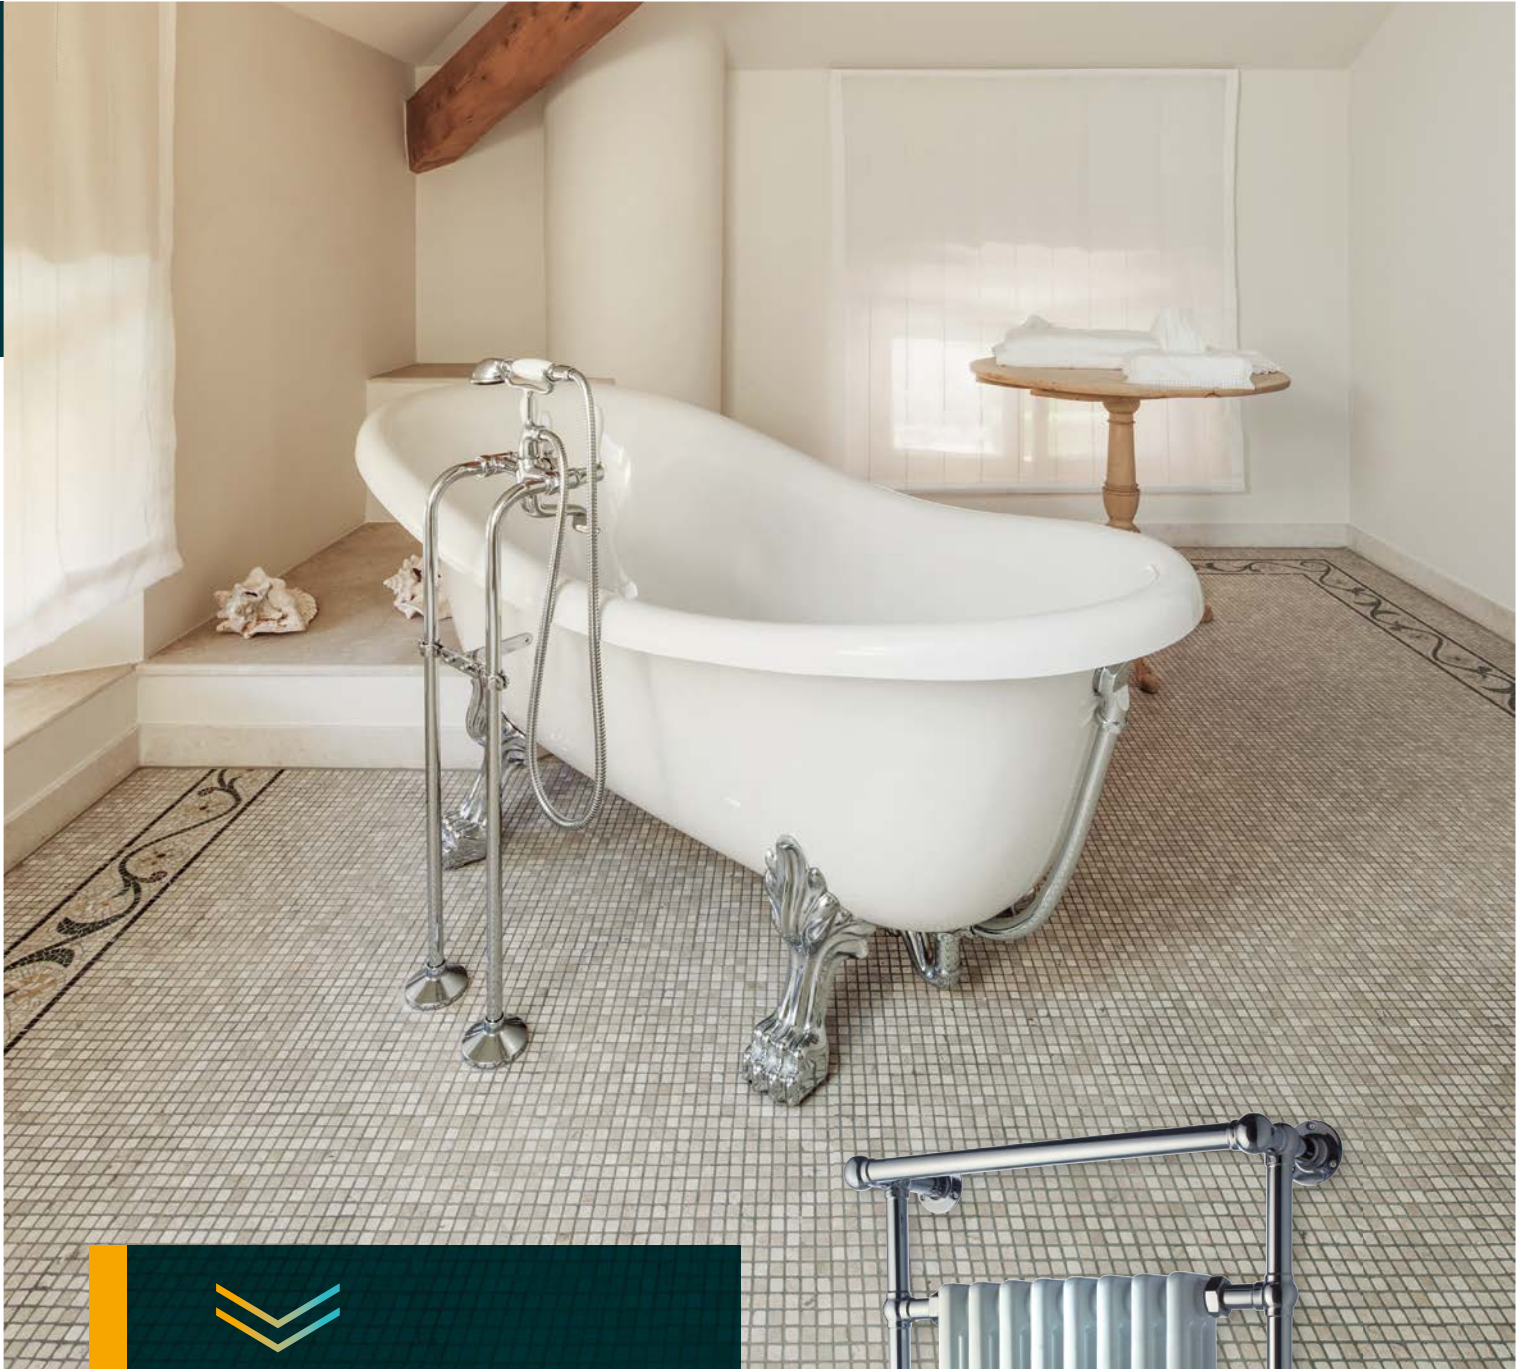


DEE

DEE is a high quality, floor standing combination radiator that will add a classic, vintage feel to your bathroom. With a beautiful COLUMN radiator nestled inbetween a traditional elegant chrome frame, this radiator offers you the best of both worlds.



Dimensions

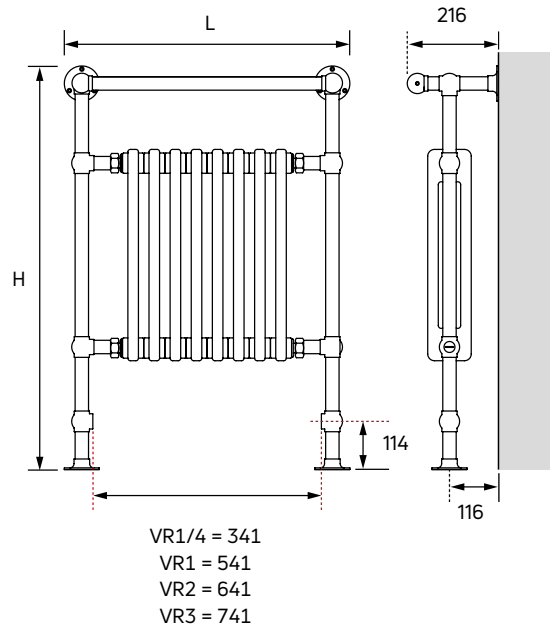

Weights & n-coefficients

Model	Weight (kg)	n-Coefficient
VR1/4	15.60	1.224
VR1	21.30	1.224
VR2	24.40	1.224
VR3	27.00	1.224

Dual fuel heater kits

Model	Dual Fuel Order Code
VR1/4	PTC300
VR1	PTC400
VR2/VR3	PTC500


General specification

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Frame finished in chrome. Radiator in white (RAL 9016).
- MATERIAL**
Frame manufactured from brass. Radiator manufactured from steel.
- ACCESSORIES**
Please see page 138.
- SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.
- CONNECTIONS**
2 x 1/2" BSP as standard.
- AIR VENTS**
Integrated.
- OPERATING PRESSURES**
Tested to a pressure of 9.6 bar.
Working pressure of up to 7.4 bar.
- DUAL FUEL**
PTC dual fuel heater kit options available. Please see table above or page 138.
- APM[®] TECHNOLOGY**
PTC heater kit comes with APM[®] technology. Please see page 257.
- DELIVERY**
2 - 5 working days.
- VALVES**
Please see page 228.

For more general information, please see page 256.


Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
VR1/4	955	476	423	1443	226	771	300
VR1	955	676	602	2054	322	1099	400
VR2	955	776	692	2361	370	1262	500
VR3	955	876	783	2672	419	1430	500



INN

INN is a simple but stylish floor standing design that will enhance any bathroom. It has a classic, minimalistic look that is also very practical, making it an ideal choice for creating an understated, traditional feel. It is manufactured from quality brass with a highly polished chrome finish.







SAXBY


SAXBY is a classic towel warmer design that is both simple and traditional. It is a practical and unobtrusive choice and will subtly enhance your bathroom with the benefit of both style and function. It is manufactured from quality brass and has a highly polished chrome plated finish.





General specification


- **CERTIFICATION**


Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- **CONNECTIONS**


2 x ½" BSP as standard.
- **AIR VENTS**


Integrated.
- **OPERATING PRESSURES**


Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- **DUAL FUEL**


PTC100 dual fuel heater kit available. Please see page 138.
- **APM* TECHNOLOGY**


PTC heater kit comes with APM* technology. Please see page 257.
- **GUARANTEE**


10 year guarantee from date of purchase against manufacturing defects.
- **COLOUR**


Finished in chrome.
- **MATERIAL**

Manufactured from brass.
- **ACCESSORIES**


Please see page 138.
- **SYSTEM (INDIRECT)**

2 pipe pumped indirect domestic and commercial heating applications.
- **SYSTEM (DIRECT)**

Suitable for direct systems. Please refer to page 257 for information on dezincification.
- **DELIVERY**

2 - 5 working days.
- **VALVES**

Please see page 228.
- For more general information, please see page 256.

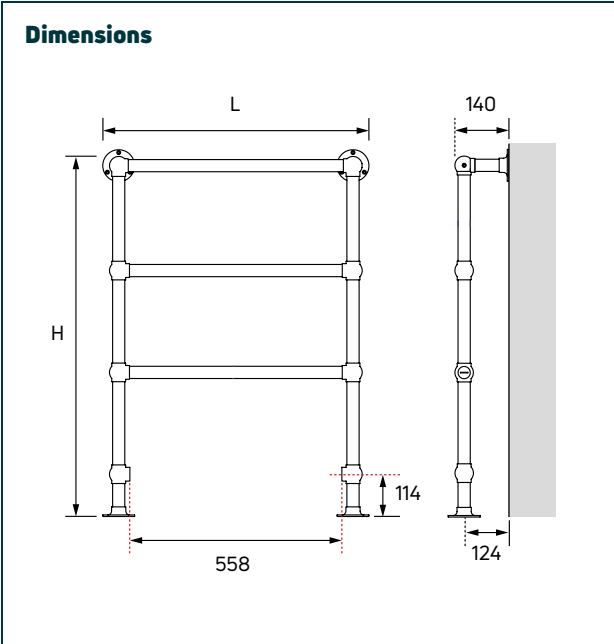

Weight


Model	Weight (kg)
B24/1	8.50


Technical information & heat outputs


Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
B24/1	955	693	146*	498*	79*	269*	100


*Outputs NPD, see page 257.


General specification


- **CERTIFICATION**


Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- **CONNECTIONS**


2 x ½" BSP as standard.
- **AIR VENTS**


Integrated.
- **OPERATING PRESSURES**


Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- **DUAL FUEL**


PTC100 dual fuel heater kit available. Please see page 138.
- **APM* TECHNOLOGY**


PTC heater kit comes with APM* technology. Please see page 257.
- **GUARANTEE**


10 year guarantee from date of purchase against manufacturing defects.
- **COLOUR**

Finished in chrome.
- **MATERIAL**


Manufactured from brass.
- **SYSTEM (INDIRECT)**

2 pipe pumped indirect domestic and commercial heating applications.
- **SYSTEM (DIRECT)**

Suitable for direct systems. Please refer to page 257 for information on dezincification.
- **DELIVERY**

2 - 5 working days.
- **VALVES**

Please see page 228.
- For more general information, please see page 256.

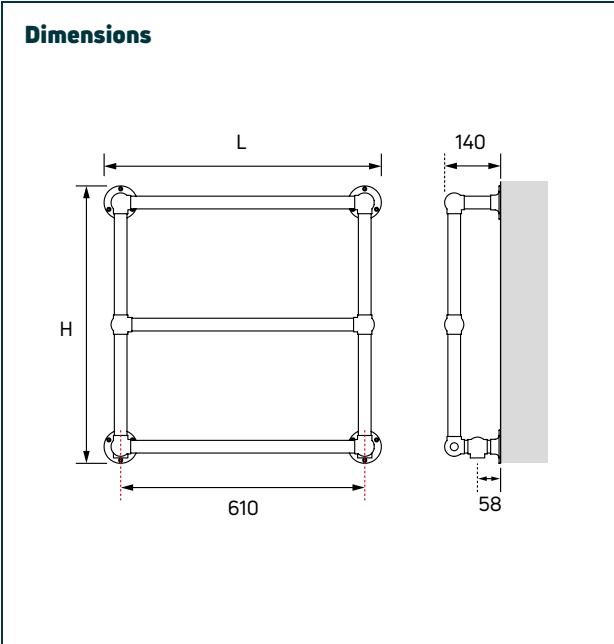


Weight

Model	Weight (kg)
B34/1	7.50

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
B34/1	693	693	199*	679*	107*	367*	100

*Outputs NPD, see page 257.





THIRLMERE


THIRLMERE is an elegant, minimalist design that projects a classic and simple style. It makes a subtle but important addition to any bathroom - unobtrusively and quietly satisfying the need for both style and function. It is manufactured from quality brass and has a highly polished chrome plated finish.





General specification


- 


CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- 


GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.
- 


COLOUR
Finished in chrome.
- 


MATERIAL
Manufactured from brass.
- 


SYSTEM (INDIRECT)
2 pipe pumped indirect domestic and commercial heating applications.
- 


SYSTEM (DIRECT)
Suitable for direct systems. Please refer to page 257 for information on dezincification.
- 


CONNECTIONS
2 x 1/2" BSP as standard.
- 

AIR VENTS
Integrated.
- 


OPERATING PRESSURES
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- 

DUAL FUEL
PTC150 dual fuel heater kit available. Please see page 138.
- 

APM® TECHNOLOGY
PTC heater kit comes with APM® technology. Please see page 257.
- 

DELIVERY
2 - 5 working days.
- 

VALVES
Please see page 228.
- For more general information, please see page 256.

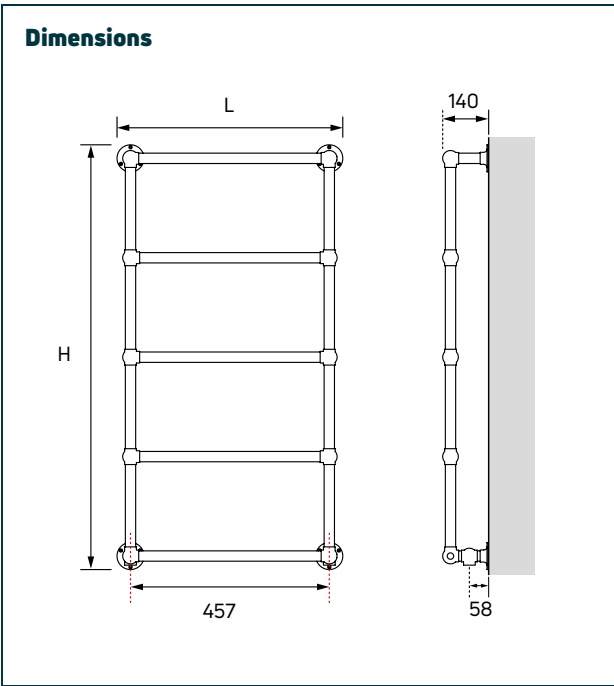

Model	Weight (kg)
B35/1	10.50

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
B35/1	1303	540	226*	770*	122*	416*	150

*Outputs NPD, see page 257.





ULLSWATER


ULLSWATER adds a touch of traditional style for any bathroom. It has a timeless quality which exudes rustic charm and its simple, rectangular framed design can be enhanced with traditional look valves for a truly authentic feel. It is manufactured from quality brass and has a highly polished chrome plated finish.





General specification


- 


CERTIFICATION
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- 


GUARANTEE
10 year guarantee from date of purchase against manufacturing defects.
- 


COLOUR
Finished in chrome.
- 


MATERIAL
Manufactured from brass.
- 


SYSTEM (INDIRECT)
2 pipe pumped indirect domestic and commercial heating applications.
- 


SYSTEM (DIRECT)
Suitable for direct systems. Please refer to page 257 for information on dezincification.
- 


CONNECTIONS
2 x 1/2" BSP as standard.
- 

AIR VENTS
Integrated.
- 


OPERATING PRESSURES
Tested to a pressure of 6.9 bar. Working pressure of up to 5.3 bar.
- 

DUAL FUEL
PTC300 dual fuel heater kit available. Please see page 138.
- 

APM® TECHNOLOGY
PTC heater kit comes with APM® technology. Please see page 257.
- 

DELIVERY
2 - 5 working days.
- 

VALVES
Please see page 228.
- For more general information, please see page 256.

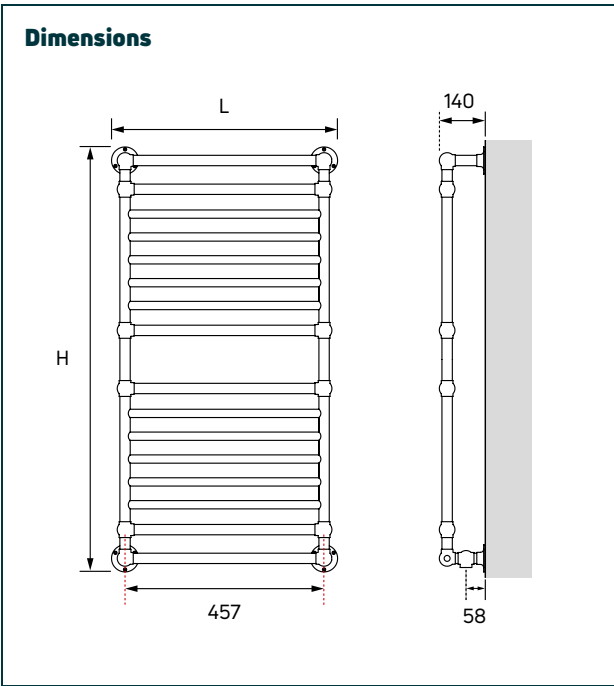


Model	Weight (kg)	n-Coefficient
B36/1	14.40	1.218

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
B36/1	1302	540	350	1194	188	641	300

MYSON's years of manufacturing expertise has allowed us to develop products that not only look great, but are also highly functional items. Our multi-rail towel warmers are simple, elegant and practical and are designed to achieve the perfect combination of practical towel placement and stylish design. We offer a choice of finish, as selected ranges are available in white, or the more popular chrome finish, as well as straight and curved options. They are made from quality brass or steel and manufactured to the highest standards.

- Ladder rails have become a modern requirement for any bathroom, and we have an extensive range to suit every need
- The popular AVONMORE is the perfect specification towel rail. There's a large choice of sizes, a white or chrome finish and straight or curved options. It also offers excellent heat outputs
- For that extra special finish, we have a range of luxury towel rails in ANGARA, FERLO and LINDI

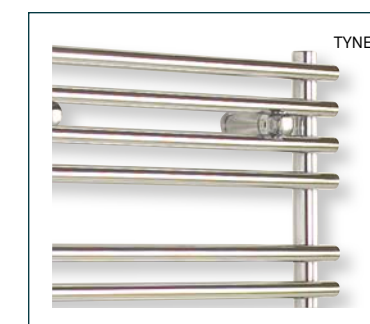

MULTI-RAIL TOWEL WARMERS



ELECTRIC MODEL AVAILABLE


Please see page 210



AVONMORE


AVONMORE is a classic multi-rail design that is available in a range of sizes, finishes, and straight or curved models. This makes it an extremely popular specification product for new build. It is highly functional for heating, with good outputs, and it has tube spacing for practical towel placement. With three different rail configurations, this is a flexible choice for any project.

Dimensions

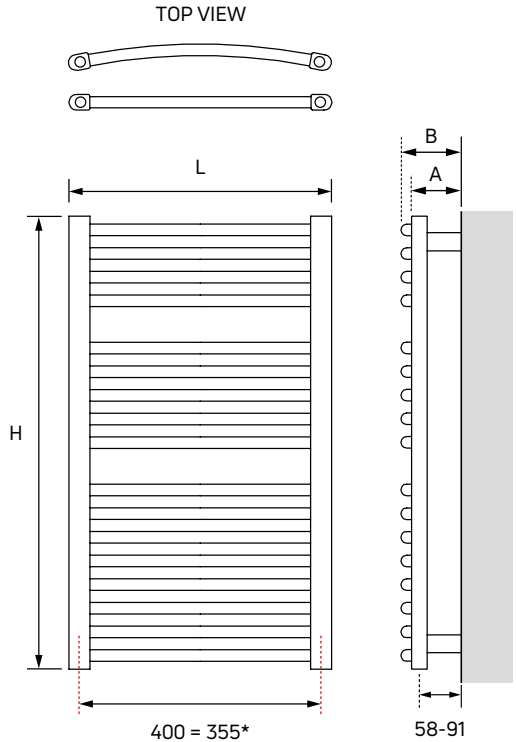

Width (mm)	A (mm)	B (mm)
400	83-106	-
500	83-106	92-115
600	83-106	100-123

A = Straight, B = Curved.



*For dual fuel +/- 70mm.

General specification

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- CONNECTIONS**
2 x 1/2" BSP as standard.
- AIR VENTS**
Included in the packaging.
- OPERATING PRESSURES**
Tested to a pressure of 9.6 bar. Working pressure of up to 7.4 bar.
- DUAL FUEL**
ECO450 dual fuel heater kit available. Please see page 138.
- DELIVERY**
2 - 5 working days.
- BIM**
Visit our website to download the BIM components www.myson.co.uk/bim
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016) or chrome.
- MATERIAL**
Manufactured from steel.
- ACCESSORIES**
Please see page 138.
- SYSTEM**
2 pipe pumped indirect domestic and commercial heating applications.

For more general information, please see page 256.

Weights, water contents & n-coefficients

Model	Weight (kg)	Water Content (l)	n-Coefficient	
			White	Chrome
AVONMORE straight - hydronic				
ECOS84	5.85	3.4	-	1.307
ECOS85	8.00	3.9	1.287	1.302
ECOS86	8.20	4.4	1.278	1.297
ECOS124	8.20	4.7	-	1.317
ECOS125	11.00	5.5	1.312	1.306
ECOS126	12.25	6.3	1.282	1.294
ECOS184	12.15	7.1	-	1.324
ECOS185	14.00	8.2	1.289	1.334
ECOS186	15.20	9.5	1.275	1.345
AVONMORE curved - hydronic				
ECOC85	8.00	3.9	1.287	1.302
ECOC86	8.20	4.4	1.278	1.297
ECOC125	11.00	5.5	1.312	1.306
ECOC126	12.25	6.3	1.282	1.294
ECOC185	14.00	8.2	1.289	1.334
ECOC186	15.20	9.5	1.275	1.345


Technical information & heat outputs

AVONMORE straight - hydronic

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C				Heat Outputs @ ΔT 30°C				Dual Fuel Rating
			Watts		Btu/h		Watts		Btu/h		
			White	Chrome	White	Chrome	White	Chrome	White	Chrome	
ECOS84	862	400	-	234	-	799	-	122	-	416	450
ECOS85	862	500	417	277	1423	945	217	144	739	492	450
ECOS86	862	600	487	328	1662	1119	253	171	863	583	450
ECOS124	1222	400	-	334	-	1140	-	172	-	586	450
ECOS125	1222	500	576	395	1965	1348	301	203	1027	693	450
ECOS126	1222	600	676	467	2307	1593	353	240	1206	819	450
ECOS184	1807	400	-	507	-	1730	-	258	-	880	450
ECOS185	1807	500	866	598	2955	2040	455	304	1552	1038	450
ECOS186	1807	600	1014	705	3460	2405	533	359	1817	1224	450

AVONMORE curved - hydronic

ECOC85	862	500	417	277	1423	945	217	144	739	492	450
ECOC86	862	600	487	328	1662	1119	253	171	863	583	450
ECOC125	1222	500	576	395	1965	1348	301	203	1027	693	450
ECOC126	1222	600	676	467	2307	1593	353	240	1206	819	450
ECOC185	1807	500	866	598	2955	2040	455	304	1552	1038	450
ECOC186	1807	600	1014	705	3460	2405	533	359	1817	1224	450

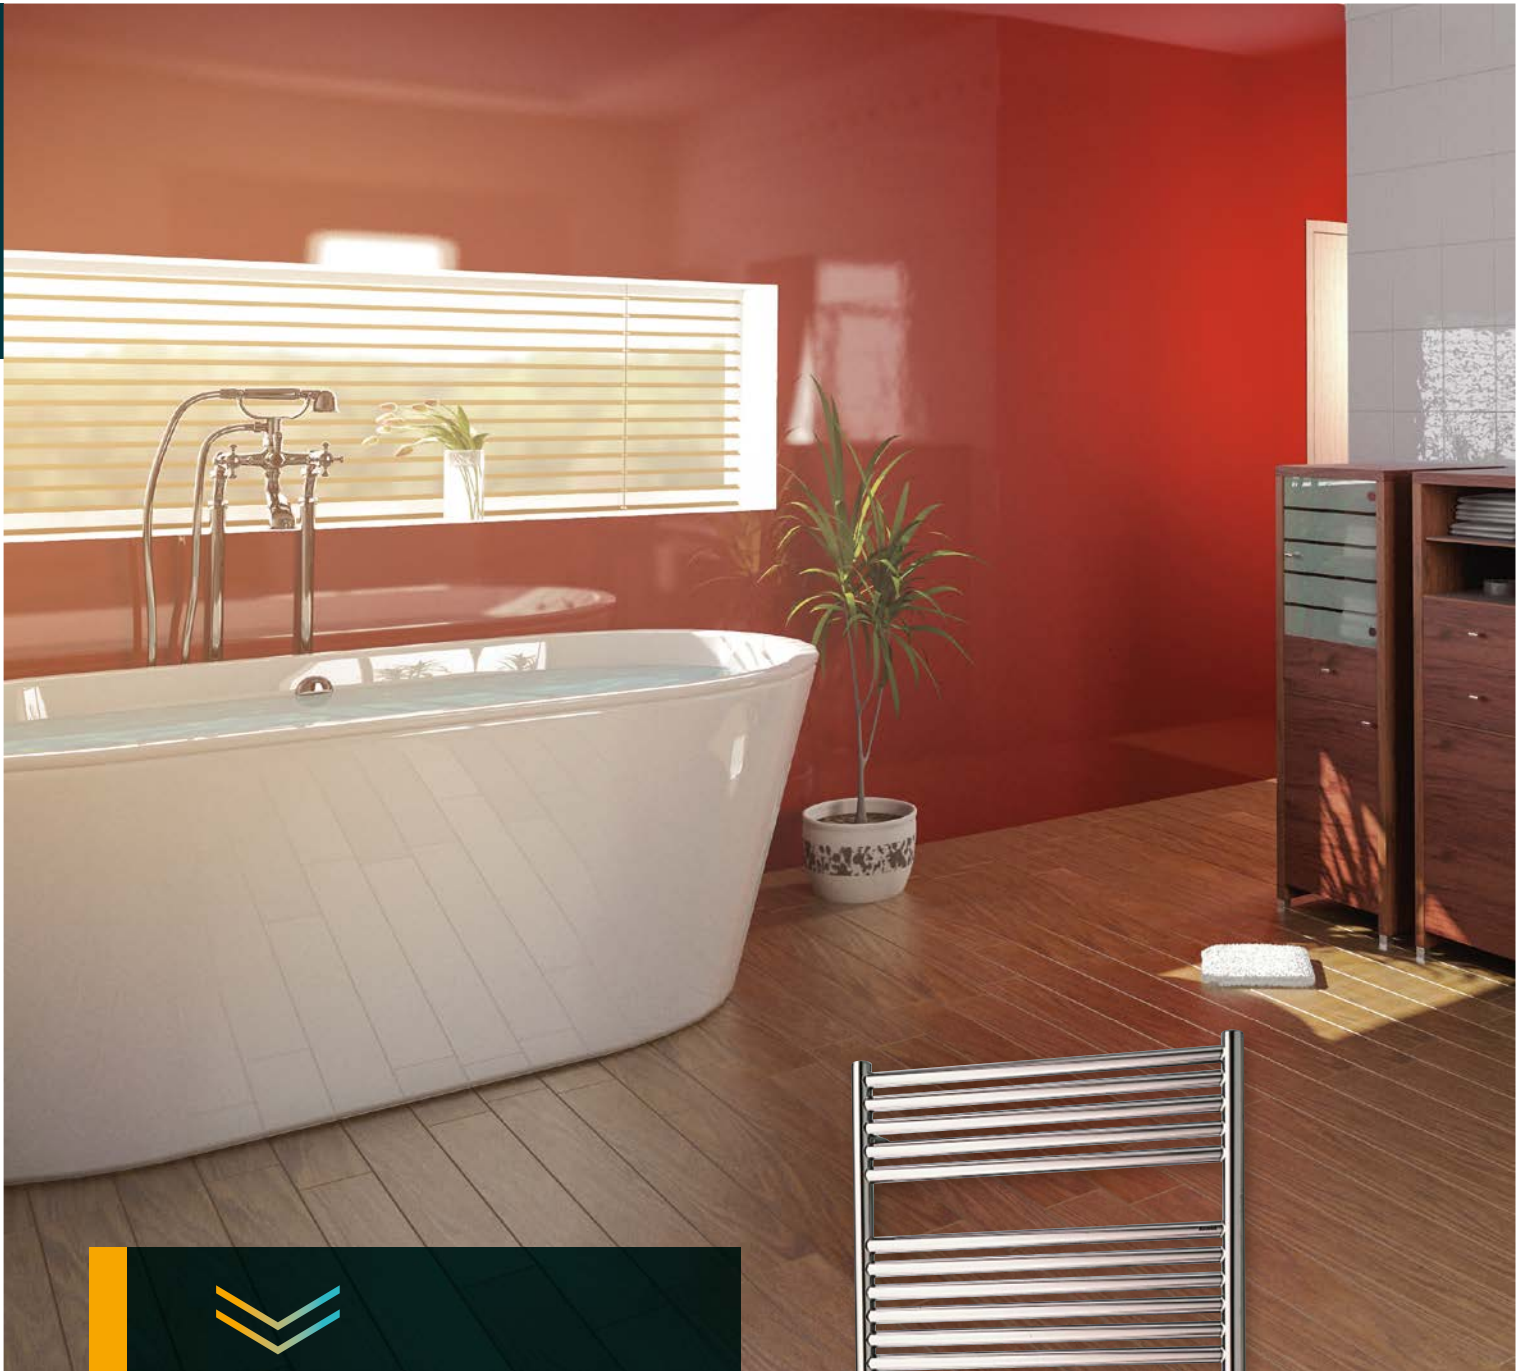


ANGARA

ANGARA is an elegantly simple ladder rail. Its classic combination of round tubes and straight multi-rail design make it a stylish and practical heating option. It is available in both a white and chrome finish.



Dimensions

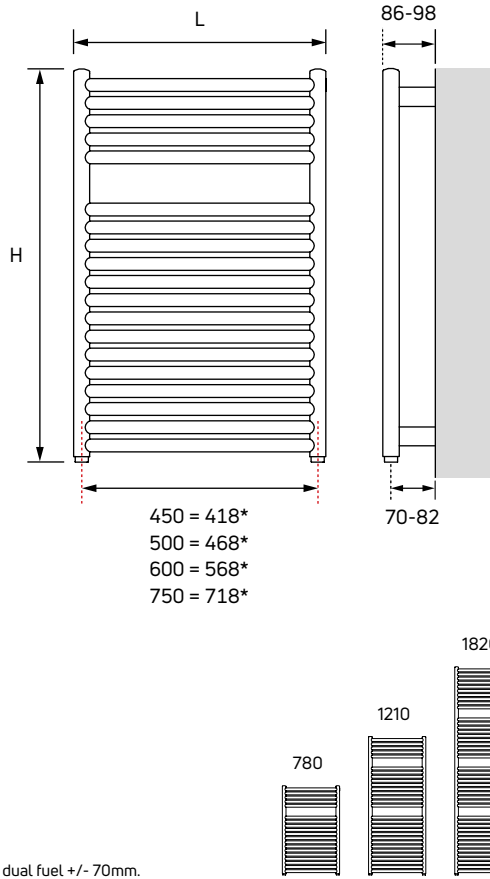

Weights & n-coefficients

Model	Weight (kg)	n-Coefficient	
		White	Chrome
MRR1/45	8.75	1.237	1.252
MRR1	9.00	1.237	1.252
MRR2	11.00	1.237	1.252
MRR3	14.00	1.237	1.252
MRR4/45	14.75	1.221	1.329
MRR4	15.00	1.221	1.329
MRR5	17.00	1.221	1.329
MRR6	21.00	1.221	1.329
MRR7	22.00	1.236	1.261
MRR8	25.00	1.236	1.261
MRR9	30.00	1.236	1.261

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C				Heat Outputs @ ΔT 30°C				Dual Fuel Rating	
			Watts		Btu/h		Watts		Btu/h		Watts	
			White	Chrome	White	Chrome	White	Chrome	White	Chrome	White	Chrome
MRR1/45	780	450	355	225	1210	769	189	118	645	403	300	200
MRR1	780	500	394	251	1344	855	209	132	713	450	300	200
MRR2	780	600	473	301	1613	1026	251	158	856	539	300	200
MRR3	780	750	591	376	2016	1282	314	192	1071	655	300	200
MRR4/45	1210	450	560	359	1910	1225	300	184	1024	628	300	200
MRR4	1210	500	622	399	2122	1361	333	204	1136	696	300	200
MRR5	1210	600	746	479	2547	1634	400	245	1365	836	300	200
MRR6	1210	750	933	599	3183	2042	500	306	1706	1044	300	200
MRR7	1820	500	939	612	3202	2086	499	321	1703	1095	500	500
MRR8	1820	600	1126	734	3843	2504	599	385	2044	1314	500	500
MRR9	1820	750	1408	917	4803	3130	749	481	2556	1641	500	500

General specification

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- CONNECTIONS**
2 x 1/2" BSP as standard.
- AIR VENTS**
Integrated.
- OPERATING PRESSURES**
Tested to a pressure of 9.6 bar (white) 6.9 bar (chrome). Working pressure of up to 7.4 bar (white) 5.3 bar (chrome).
- DUAL FUEL**
MHK dual fuel heater kit options available. Please see table below or page 138 for more information.
- APM[®] TECHNOLOGY**
MHK heater kit comes with APM[®] technology. Please see page 257.
- DELIVERY**
Stocked items (white): 2 - 5 working days. Non-stocked items (chrome): 8 -12 weeks.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016) or chrome.
- MATERIAL**
White product manufactured from steel. Chrome product manufactured from brass.
- ACCESSORIES**
Please see page 138.
- SYSTEM (INDIRECT)**
2 pipe pumped indirect domestic and commercial heating applications.
- SYSTEM (DIRECT)**
Chrome model suitable for most direct central heating or hot water systems. Please refer to page 257 for information on dezincification.

For more general information, please see page 256.

Dual fuel heater kits


Model	Suitable for White Rail	Suitable for Chrome Rail
	Code	Code
MRR1/45 to MRR6	MHK300	MHK200
MRR7 to MRR9	MHK500	MHK500



FERLO

FERLO is a beautiful, high-quality curved towel rail that will add a luxurious finish to any bathroom. With a choice of a white or chrome finish, a wide range of sizes and a classic design, the FERLO makes a great choice for any project.

Dimensions

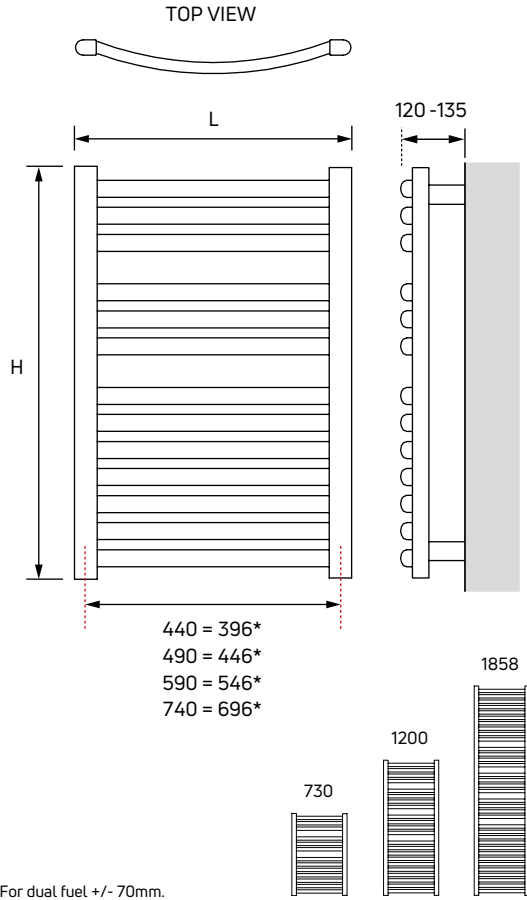

*For dual fuel +/- 70mm.

Weights & n-coefficients

Model	Weight (kg)	n-Coefficient	
		White	Chrome
CMR1/45	8.40	1.248	1.255
CMR1	10.20	1.248	1.255
CMR2	10.20	1.248	1.255
CMR3	14.30	1.248	1.255
CMR4/45	15.70	1.233	1.328
CMR4	17.00	1.233	1.328
CMR5	20.40	1.233	1.328
CMR6	24.00	1.233	1.328
CMR7/45	25.20	1.232	1.273
CMR7	27.50	1.232	1.273
CMR8	32.20	1.232	1.273
CMR9	39.00	1.232	1.273

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C				Heat Outputs @ ΔT 30°C				Dual Fuel Rating	
			Watts		Btu/h		Watts		Btu/h		Watts	
			White	Chrome	White	Chrome	White	Chrome	White	Chrome	White	Chrome
CMR1/45	730	440	297	195	1015	666	157	103	536	351	300	200
CMR1	730	490	331	217	1128	740	175	114	597	389	300	200
CMR2	730	590	397	260	1353	888	210	137	717	467	300	200
CMR3	730	740	496	326	1691	1111	262	171	894	583	300	200
CMR4/45	1200	440	493	322	1681	1098	250	163	853	556	300	200
CMR4	1200	490	548	358	1868	1220	278	181	949	618	300	200
CMR5	1200	590	657	429	2242	1464	333	218	1136	744	300	200
CMR6	1200	740	821	536	2802	1830	417	272	1423	928	300	200
CMR7/45	1858	440	755	491	2575	1674	394	256	1344	873	500	500
CMR7	1858	490	839	545	2861	1860	438	284	1494	969	500	500
CMR8	1858	590	1006	654	3433	2231	525	341	1791	1163	500	500
CMR9	1858	740	1258	818	4291	2789	656	427	2238	1457	500	500

General specification

- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- CONNECTIONS**
2 x 1/2" BSP as standard.
- AIR VENTS**
Integrated.
- OPERATING PRESSURES**
Tested to a pressure of 9.6 bar (white) 6.9 bar (chrome). Working pressure of up to 7.4 bar (white) 5.3 bar (chrome).
- DUAL FUEL**
MHK dual fuel heater kit options available. Please see table below or page 138 for more information.
- APM TECHNOLOGY**
MHK heater kit comes with APM technology. Please see page 257.
- DELIVERY**
Non-stocked item: 8 - 12 weeks.
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016) or chrome.
- MATERIAL**
White product manufactured from steel. Chrome product manufactured from brass.
- ACCESSORIES**
Please see page 138.
- SYSTEM (INDIRECT)**
2 pipe pumped indirect domestic and commercial heating applications.
- SYSTEM (DIRECT)**
Chrome model suitable for most direct central heating or hot water systems. Please refer to page 257 for information on dezincification.

For more general information, please see page 256.

Dual fuel heater kits

Model	Suitable for White Rail	Suitable for Chrome Rail
	Code	Code
CMR1/45 to CMR6	MHK300	MHK200
CMR7/45 to CMR9	MHK500	MHK500




LINDI

LINDI is a beautiful, stylish and eye-catching towel rail that will make a confident statement in any bathroom. Its combination of a square frame and round tube rails creates a unique fusion of styles. It's available in a white and chrome finish and a range of sizes.



Dimensions

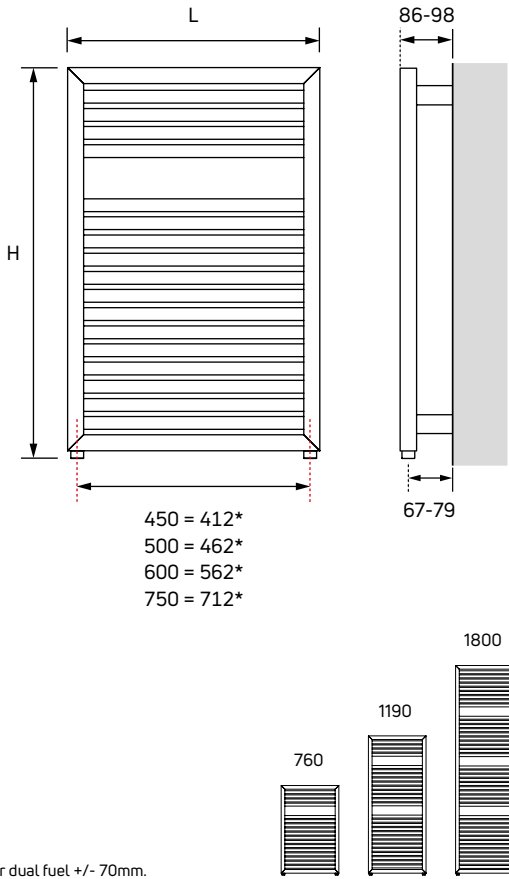

Weights & n-coefficients

Model	Weight (kg)	n-Coefficient	
		White	Chrome
MRS1/45	9.75	1.268	1.276
MRS1	10.00	1.268	1.276
MRS2	13.00	1.268	1.276
MRS3	15.00	1.268	1.276
MRS4/45	15.75	1.240	1.287
MRS4	16.00	1.240	1.287
MRS5	19.40	1.240	1.287
MRS6	23.00	1.240	1.287
MRS7	26.50	1.242	1.310
MRS8	31.20	1.242	1.310

Technical information & heat outputs

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C				Heat Outputs @ ΔT 30°C				Dual Fuel Rating	
			Watts		Btu/h		Watts		Btu/h		Watts	
			White	Chrome	White	Chrome	White	Chrome	White	Chrome	White	Chrome
MRS1/45	760	450	351	239	1198	817	184	125	628	427	300	200
MRS1	760	500	390	266	1331	908	204	139	696	474	300	200
MRS2	760	600	468	319	1597	1089	245	166	836	566	300	200
MRS3	760	750	585	399	1996	1361	306	208	1044	710	300	200
MRS4/45	1190	450	576	359	1965	1225	306	186	1044	635	300	200
MRS4	1190	500	640	399	2184	1361	340	207	1160	706	300	200
MRS5	1190	600	768	479	2620	1634	408	248	1392	846	300	200
MRS6	1190	750	960	599	3276	2042	509	310	1737	1058	300	200
MRS7	1800	500	959	613	3270	2092	508	314	1733	1071	500	500
MRS8	1800	600	1150	736	3924	2510	610	377	2081	1286	500	500

General specification


- CERTIFICATION**
Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- CONNECTIONS**
2 x 1/2" BSP as standard.
- AIR VENTS**
Integrated.
- OPERATING PRESSURES**
Tested to a pressure of 9.6 bar (white) 6.9 bar (chrome). Working pressure of up to 7.4 bar (white) 5.3 bar (chrome).
- GUARANTEE**
10 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016) or chrome.
- MATERIAL**
White product manufactured from steel. Chrome product manufactured from brass.
- ACCESSORIES**
Please see page 138.
- SYSTEM (INDIRECT)**
2 pipe pumped indirect domestic and commercial heating applications.
- SYSTEM (DIRECT)**
Chrome model suitable for most direct central heating or hot water systems. Please refer to page 257 for information on dezincification.
- DUAL FUEL**
MHK dual fuel heater kit options available. Please see table below or page 138 for more information.
- APM[®] TECHNOLOGY**
MHK heater kit comes with APM[®] technology. Please see page 257.
- DELIVERY**
Stocked items (white): 2 - 5 working days. Non-stocked items (chrome): 8 -12 weeks.

For more general information, please see page 256.

Dual fuel heater kits

Model	Suitable for White Rail	Suitable for Chrome Rail
	Code	Code
MRS1/45 to MRS6	MHK300	MHK200
MRS7 to MRS8	MHK500	MHK500






TYNE

TYNE is a classic tube-on-tube ladder rail. It has a light, modern design and provides a discrete but stylish presence in any bathroom. It is available in a range of sizes and comes with a dual fuel heater option.




Dimensions

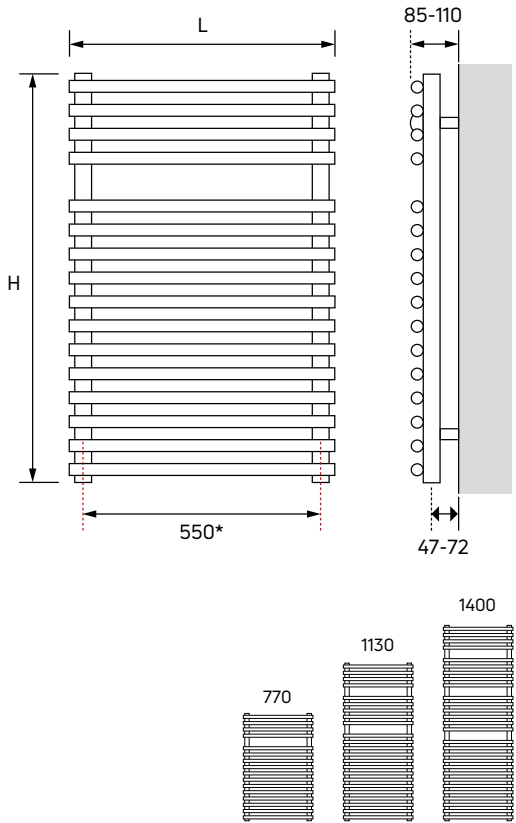



Weights, water contents & n-coefficients


Model	Weight (kg)	Water Content (l)	n-Coefficient
TUB1	9.30	3.5	1.231
TUB2	13.00	5.0	1.251
TUB3	16.20	6.7	1.253


General specification


- **CERTIFICATION**

Manufactured and tested to BS EN 442 & EN 442. Carries the CE & UKCA Mark. Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001.
- **GUARANTEE**


10 year guarantee from date of purchase against manufacturing defects.
- **COLOUR**


Finished in chrome.
- **MATERIAL**


Manufactured from steel.
- **ACCESSORIES**


Please see page 138.
- **SYSTEM**


2 pipe pumped indirect domestic and commercial heating applications.

- **CONNECTIONS**

2 x 1/2" BSP as standard.
- **AIR VENTS**

Included in the packaging.
- **OPERATING PRESSURES**

Tested to a pressure of 9.6 bar. Working pressure of up to 7.4 bar.
- **DUAL FUEL**

ECO450 dual fuel heater kit available. Please see page 138.
- **DELIVERY**

2 - 5 working days.

For more general information, please see page 256.

Technical information & heat outputs



Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Dual Fuel Rating
			Watts	Btu/h	Watts	Btu/h	
TUB1	770	600	318	1085	170	580	450
TUB2	1130	600	448	1529	236	805	450
TUB3	1400	600	547	1866	288	983	450

TOWEL WARMERS

Accessories

Product	Description	Order Code	Chrome
<div>Discreet Wire Kit</div> <div></div>	Covers the element end and cable. Suitable for the entire MYSON APM® electric range and selected dual fuel models.	DISCREET	✓
<div>Cone Wire Kit</div> <div></div>	Covers the element end. Suitable for the entire MYSON APM® electric range and selected dual fuel models.	CONE	✓
<div>Heater Kits ECO450 & MHK</div> <div></div>	Dual fuel heater kit. Suitable for: KASAI, INTERLUDE, MARANOA, AVONMORE & TYNE. Multi-rail heater kit including APM® technology. Suitable for: LINDI, ANGARA & FERLO.	ECO450 MHK200 MHK300 MHK500	✓ ✓ ✓ ✓
<div>Heating Element</div> <div></div>	Dual fuel heating elements with APM® technology. Suitable for: STOUR, AWE, DEE, INN, SAXBY, THIRLMERE & ULLSWATER.	PTC75 PTC100 PTC150 PTC200 PTC300 PTC400 PTC500	✓ ✓ ✓ ✓ ✓ ✓ ✓
<div>Sleeving Kit</div> <div></div>	Covers water pipes and the holes through which they come. ½" to suit the valves used. Suitable for floor standing products.	SK15	✓

For more information on APM® technology please see page 257.

Product	Description	Order Code	Chrome	White
<div>Towel Peg</div> <div></div>	Suitable for: FERLO, ANGARA, LINDI, AVONMORE, TYNE, FATALA & KASAI.	TPEG1	✓	-
<div>Towel Peg</div> <div></div>	Suitable for: FERLO, ANGARA, LINDI, AVONMORE, TYNE, FATALA & KASAI.	TPEG3	✓ (Pack of 2)	✓ (Pack of 2)
<div>Towel Peg</div> <div></div>	Suitable for: FERLO, ANGARA, LINDI, AVONMORE, TYNE, FATALA & KASAI.	TPEG4	✓ (Pack of 2)	✓ (Pack of 2)
<div>Towel Rail</div> <div></div>	500mm wide suitable for: FERLO, ANGARA, LINDI, AVONMORE, TYNE, FATALA & KASAI.	TRAIL1	✓ (Straight & Curved)	✓ (Straight & Curved)
<div>Towel Rail</div> <div></div>	600mm wide suitable for: FERLO, ANGARA, LINDI, AVONMORE, TYNE, FATALA & KASAI.	TRAIL2	✓ (Straight & Curved)	✓ (Straight & Curved)
<div>Towel Rail</div> <div></div>	Suitable for: FERLO, ANGARA, LINDI, AVONMORE, TYNE, FATALA & KASAI.	TRAIL3	✓	✓
<div>Towel Ring</div> <div></div>	Suitable for: FATALA & KASAI.	TRING	✓	-
<div>Towel Ring</div> <div></div>	Suitable for: FERLO, ANGARA, LINDI, BANI & AVONMORE.	TRING1	✓	✓
<div>Laundry Rail (chrome)</div> <div></div>	Suitable for: KASAI & FATALA.	LRAIL	✓	-
<div>Glass Shelf (chrome)</div> <div></div>	Suitable for: KASAI & FATALA.	GSHELF	✓	-



Fan convectors


All MYSON fan convectors are made up of similar core components, offering a range of features:

- A copper pipe heat exchanger with aluminium fins, which gives a huge surface area
- A motor and fan that force air over the heat exchanger
- Hot water temperature sensors that determine if the heating system is running or not
- Controls that allow the user to setup the product to suit their needs

The way fan convectors activate is usually via the water side temperature sensor. If the water in the heating system is hot enough then the fans will switch on and if the heating system switches off and the water cools down then the fans will deactivate.



KICKSPACE®

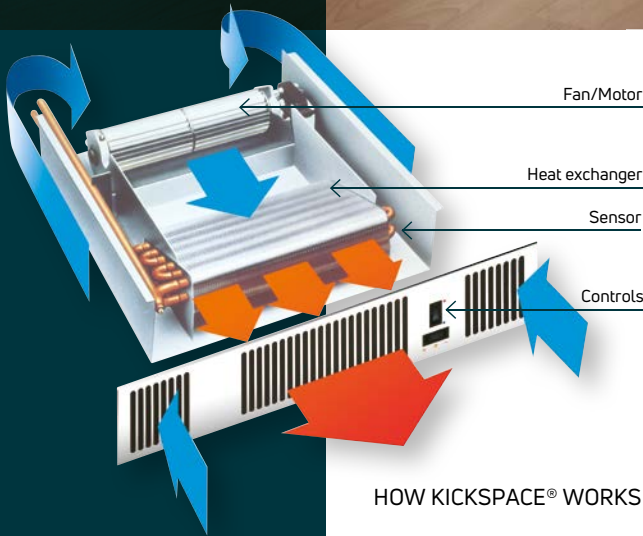

HOW KICKSPACE® WORKS

Clever by design, MYSON's innovative, plinth heaters provide a space saving heating solution for kitchens where vital wall space is often taken up by a traditional radiator. The discrete KICKSPACE® can be fitted easily under units allowing more interior design freedom and rapid space heating using a high surface area heat exchanger.

NEW & IMPROVED



Electric - KICKSPACE® 500E & 600E ECO

The electric KICKSPACE® is perfect for properties without a central heating system or in rooms where there is no existing pipework. Quick and easy to fit, the 500E ECO can provide a heat output up to 2kW while the 600E ECO is up to 3kW.



500E & 600E ECO

Duo - KICKSPACE® 500 DUO ECO

The KICKSPACE® 500 DUO ECO model combines the advantages of the hydronic and electric models, with the flexibility to switch between central heating and electric modes.



500 DUO ECO



Wireless Thermostat
Supplied with KICKSPACE® 500E, 600E & DUO ECO models

Hydronic - KICKSPACE® 500, 600 & 800

The most popular range of KICKSPACE® are the hydronic models that integrate directly into the existing central heating system. These three models provide heat outputs from 1kW to 2.6kW, providing warmth for any room. The fan on these models will activate with the central heating system.

Low voltage hydronic - KICKSPACE® 600-12V

This unique model means you get all the advantages of KICKSPACE® but it can be used in areas of high humidity, such as bathrooms and en-suites.




500

Hydronic - KICKSPACE® 80S & 80D

The KICKSPACE® 80S and 80D are a lower height and suitable for Ikea and European style kitchen units. They have all the features of the KICKSPACE® and come in a single and double width for extra output.



80S

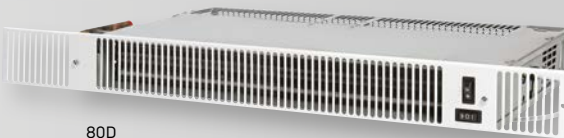

80D


KICKSPACE®

Controls & accessories

Hydronic controls



Electric/Duo* controls

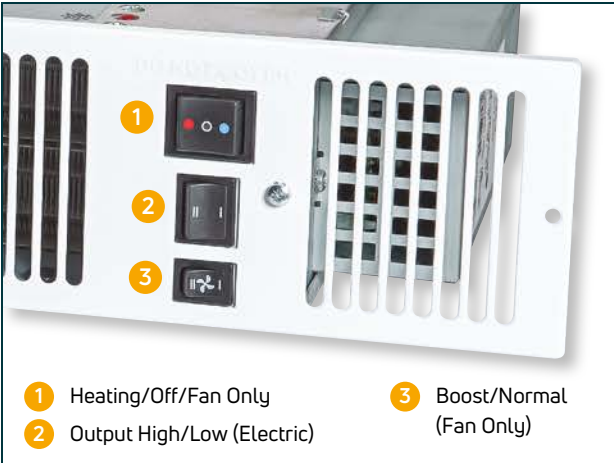

*DUO = Electric/Hot Water

KICKSPACE® Grilles

KICKSPACE® grilles are available in four finishes, white, black, chrome and brushed stainless steel. All KICKSPACE® models are supplied with white grilles however alternative finishes can be purchased separately.



External Thermostatic Controls suitable for Hydronic KICKSPACE® (500, 600, 600-12V, 800, 80S and 80D)

The following range of controls are compatible with our hydronic KICKSPACE® models:

MRT1 - Room Thermostat is an analogue dial thermostat, for more information please refer to page 244.

MPRT - Programmable Room Thermostat is an easy to use digital programmable thermostat that incorporates our Smart Start technology, for more information please refer to page 247.

TOUCH - A touch screen programmable thermostat that incorporates our Smart Start Technology, for more information please refer to page 248.

TOUCH2 WiFi - Second generation touch screen thermostats with touch sensitive controls giving you the ability to control over WiFi from your smart phone**, for more information please refer to page 249.

**TOUCH2 WiFi Hub required for WiFi control - purchased separately.



MRT1



MPRT



TOUCH



TOUCH2 WiFi

For wiring information please visit www.myson.co.uk, go to your chosen KICKSPACE® product page via the fan convector tab and click downloads.

KICKSPACE®

General specification & technical information

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018. Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU. Hydronic/Duo outputs are tested to BS 4856 Part 1. Sound levels are tested to EN 23741. Electric and Duo models are also tested to RED 2014/53/EU. BEAB Approved.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Supplied grilles finished in white (RAL 9016). Black (RAL 9011), chrome and brushed stainless steel can be purchased separately.
- ACCESSORIES**
Optional coloured grilles are available for the full KICKSPACE® range, please see page 147.
A range of controls are also available for KICKSPACE® 500, 600, 600-12V, 800, 80S & 80D, note they are currently not compatible with KICKSPACE® Electric or Duo models, for more information please refer to page 144.
- SYSTEM**
Closed circulation, 2 pipe pump assisted central heating systems.

- CONNECTIONS**
Hydronic/Duo: 15mm copper pipes.
Compression: Compression fitting flexible hoses supplied.
- AIR VENTS**
Integrated (Hydronic/Duo only).
- OPERATING PRESSURES**
Hydronic/Duo - tested to a pressure of 20 bar, working pressure of up to 10 bar.
- OPERATING TEMPERATURE**
Hydronic/Duo - maximum 90°C.
- ELECTRICAL SUPPLY**
220-240V-50Hz.
KICKSPACE® 500, 600, 600-12V, 800, 80S & 80D require a supply fused at 3A.
KICKSPACE® 500 DUO ECO requires a supply fused at 5A.
KICKSPACE® 500E ECO requires a supply fused at 10A.
KICKSPACE® 600E ECO requires a supply fused at 13A.
- DELIVERY**
2 - 5 working days.
- ECO DESIGN DIRECTIVE**
Electric and Duo models conform to the standards (EU) 2015/1188.

For more general information, please see page 256.

Hydronic models

		Fan Speed	Model						
			500	600	800	600-12V	500 DUO ECO	80S	80D
Dimensions	Nominal Height (mm)	-	101	101	101	101	101	80	80
	Depth (mm)	-	309	309	309	309	330	301	301
	Length (mm)	-	496	550	603	550	496	560	760

Sound Levels*	Sound Pressure (dBA) (at 2.5m)	Normal	25.7	26.4	28.5	29.4	25.7	24.5	21.8
		Boost	38.1	37.2	49.8	39.0	38.1	31.4	35.6

Weight, Water Content & Motor Power	Unit Weight (kg)	-	4.3	5.0	5.5	7.9†	4.3	3.83	5.13
	Water Content (l)	-	0.26	0.30	0.34	0.30	0.26	0.17	0.25
	Motor Power (W - max.)	-	25	40	40	40	25	13	17

Air Flow Rates	Air Flow (m³/h)	Normal	70	106	139	106	70	68	87
		Boost	90	138	210	138	90	71	90
	Air Flow (ft³/h)	Normal	2471	3742	4908	3742	2471	2313	3192
		Boost	3177	4872	7415	4872	3117	2511	3069

Approximate Hydraulic Resistance	mm wg	ltr/h	Model						
			500	600	800	600-12V	500 DUO ECO	80S	80D
		455	788	1046	911	1046	788	592	613
		340	488	625	544	625	488	372	439
	kPa	227	231	326	258	326	231	207	295
		113	82	95	82	95	82	95	176
		455	7.7	10.3	8.9	10.3	7.7	5.8	6.0
		340	4.8	6.1	5.3	6.1	4.8	3.6	4.3
		227	2.3	3.2	2.5	3.2	2.3	2.0	2.9
		113	0.8	0.9	0.8	0.9	0.8	0.9	1.7

*Sound levels tested in accordance with EN 23741.

†Includes transformer.

KICKSPACE®

Technical information (cont...)

Electric models

Dimensions	Nominal Height (mm) Nominal Depth (mm) Nominal Length (mm)	Fan Speed	Model	
			500E ECO	600E ECO
			101	101
			203	203
Sound Levels*	Sound Pressure (dBA) (at 2.5m)	Normal	25.7	26.4
		Boost	38.1	37.2
Weight	Unit Weight (kg)	-	3.1	3.6
Air Flow Rates	Air Flow (m³/h)	Normal	70	106
		Boost	90	138
	Air Flow (ft³/h)	Normal	2471	3742
		Boost	3177	4872

*Sound levels tested in accordance with EN 23741.

Dimensions

KICKSPACE® 500

Top view: 496mm width, 101mm height. Front view: 496mm width, 101mm height.

KICKSPACE® 600/600-12v

Top view: 550mm width, 101mm height. Front view: 550mm width, 101mm height.

KICKSPACE® 800

Top view: 603mm width, 101mm height. Front view: 603mm width, 101mm height.

KICKSPACE® 500 DUO ECO

Top view: 496mm width, 101mm height. Front view: 496mm width, 101mm height.

KICKSPACE® 500E ECO

Top view: 496mm width, 101mm height. Front view: 496mm width, 101mm height.

KICKSPACE® 600E ECO

Top view: 550mm width, 101mm height. Front view: 550mm width, 101mm height.

KICKSPACE® 80S

Top view: 550mm width, 101mm height. Front view: 550mm width, 101mm height.

KICKSPACE® 80D

Top view: 760mm width, 101mm height. Front view: 760mm width, 101mm height.

N.B: Add 4.5mm to the chassis height of the above models to allow for rubber mountings and screws.

KICKSPACE®

Heat outputs

Hydronic models

Model	Fan Speed	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Grille Supplied	Order Code
		Watts	Btu/h	Watts	Btu/h		
KICKSPACE® 500	Normal	896	3057	566	1930	White	3KICK500
	Boost	1166	3980	683	2331		
KICKSPACE® 600	Normal	1278	4361	729	2486	White	3KICK600
	Boost	1625	5545	939	3203		
KICKSPACE® 800	Normal	1707	5824	1077	3675	White	3KICK800
	Boost	2192	7478	1289	4397		
KICKSPACE® 80S	Normal	755	2576	455	1552	White	3KICK80S
	Boost	876	2989	509	1737		
KICKSPACE® 80D	Normal	1023	3490	624	2129	White	3KICK80D
	Boost	1169	3989	707	2412		

Low voltage hydronic model

KICKSPACE® 600-12V	Normal	1278	4361	729	2486	White	3KICK60012V
	Boost	1625	5545	939	3203		

Hydronic-electric model

KICKSPACE® 500 DUO ECO*	Normal	896	3057	566	1930	White	3KICK500DUOECO
	Boost	1166	3980	683	2331		

Heat outputs tested in accordance with BS 4856 Part 1.
*The unit will operate on either fan speed to provide 1kW of heating in electric mode.

Flow Rate: 340 ltr/h (75 gal/h)

Flow Rate Correction Factors:

455 ltr/h (100 gal/h) multiply output by 1.03

227 ltr/h (50 gal/h) multiply output by 0.96

113 ltr/h (25 gal/h) multiply output by 0.85

Electric models


Model	Fan Speed	Heat Outputs		Grille Supplied	Order Code
		Watts	Btu/h		
KICKSPACE® 500E ECO	Normal	1000	3412	White	3KICK500EECO
	Boost	2000	6824		
KICKSPACE® 600E ECO	Normal	1500	5118	White	3KICK600EECO
	Boost	3000	10236		

KICKSPACE® grilles

Colour	Order Code - KICKSPACE® Model						
	500	600 / 600-12V	800	500E ECO / 500 DUO ECO	600E ECO	80S	80D
White	WG500	WG600	3WG800	EWG500	EWG600	WG80S	WG80D
Black	BLG500	BLG600	3BLG800	EBLG500	EBLG600	BLG80S	BLG80D
Chrome	CG500	CG600	3CG800	ECG500	ECG600	CG80S	CG80D
Brushed Stainless Steel	BSG500	BSG600	3BSG800	EBSG500	EBSG600	BSG80S	BSG80D

KICKSPACE® controls & accessories

Product	Order Code
MRT1 Room Thermostat	MRT1
MRT1 Room Thermostat (Braille Version)	MRT1BRAILLE
MPRT Programmable Room Thermostat	MPRT
MPRT Programmable Room Thermostat, Chrome Fascia	MPRTCR
TOUCH Screen Programmable Room Thermostat	TOUCH
TOUCH2 WiFi Touch Pad Programmable Room Thermostat for 'Smart Phone' Control & Control Hub	T2AHWIFI
TOUCH2 WiFi Touch Pad Programmable Room Thermostat for 'Smart Phone' Control	T2WIFI
KICKSPACE® Flexible Hoses (Pair)	FP

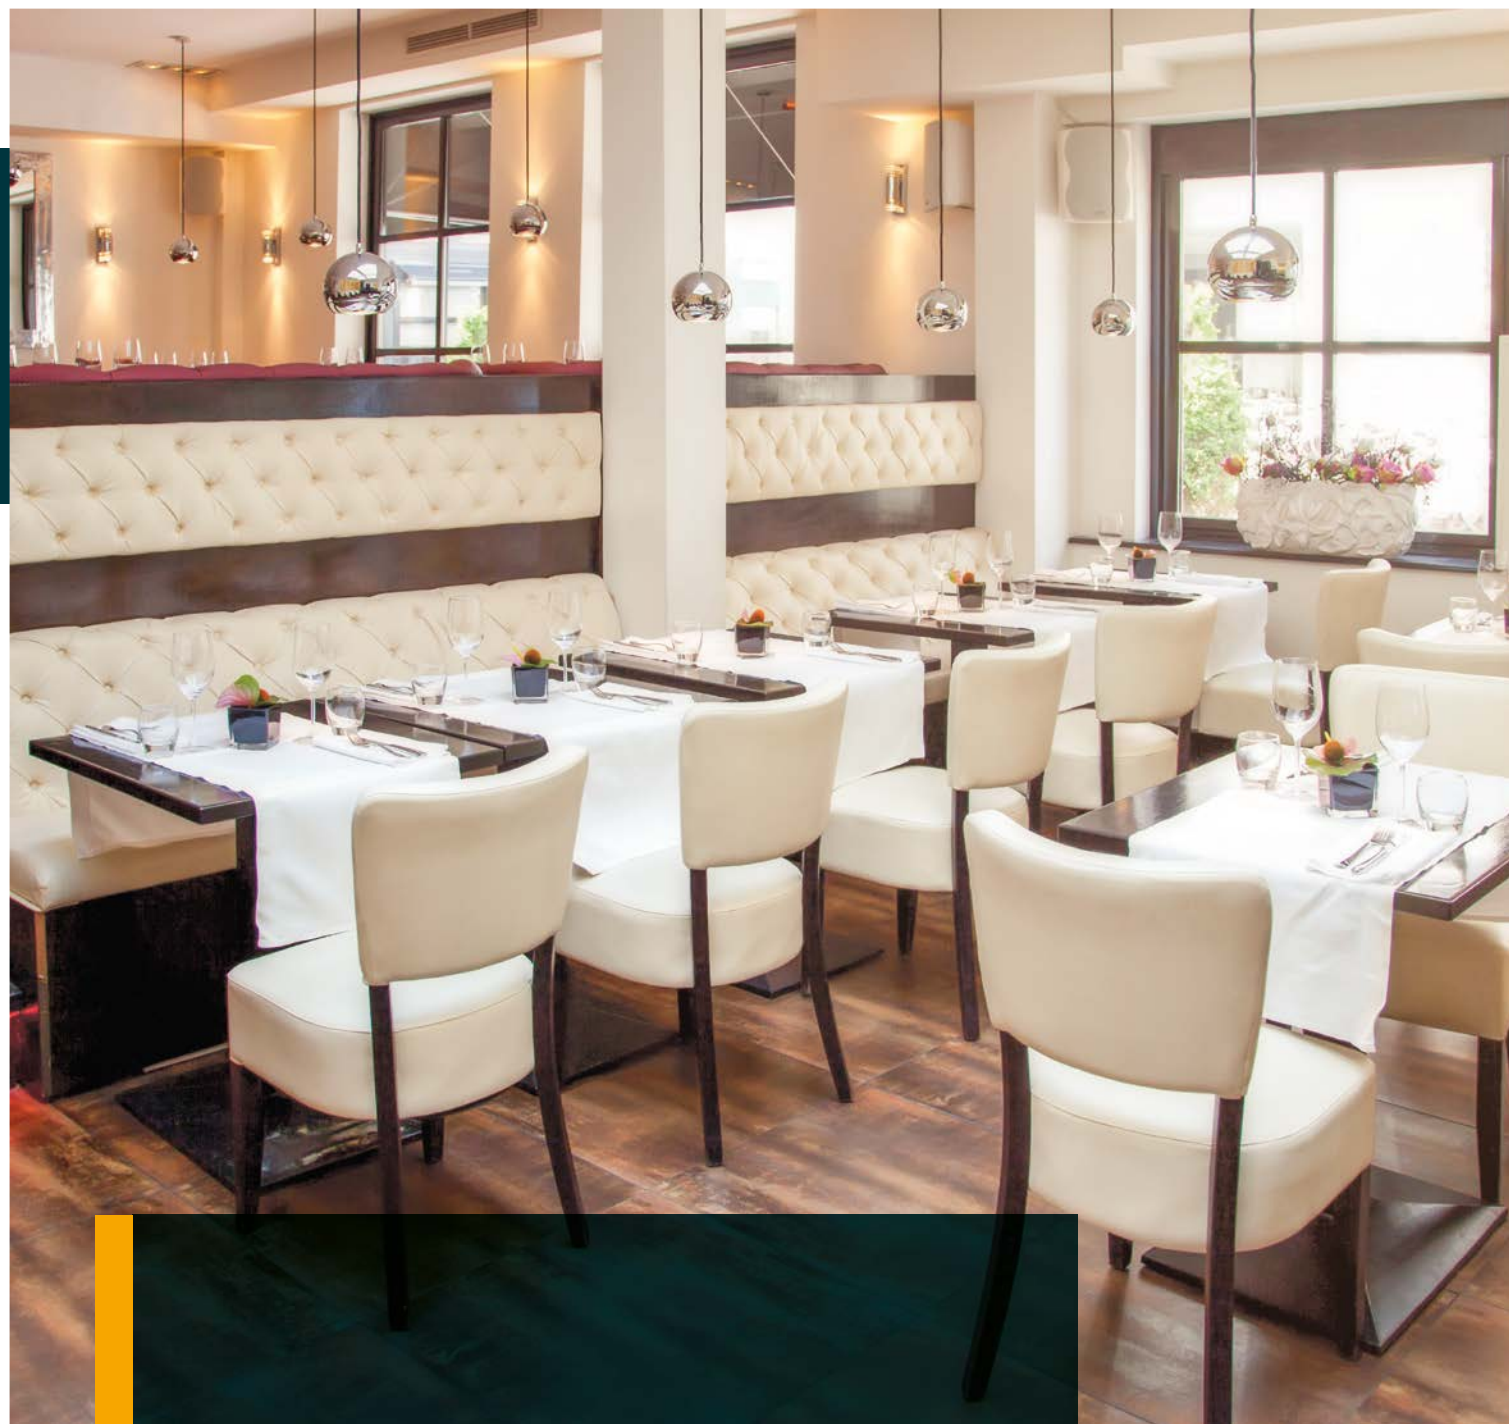

WALLMOUNT RANGE (HI-LINE & LO-LINE)

The wallmount range provides rapid heat using a small amount of space. They are perfect for maximising the amount of available space in any room. They provide solutions for semi-commercial applications such as retail or restaurant dining spaces. They can also be a great solution for domestic properties in areas such as conservatories or narrow areas that have large heating demands.

HI-LINE Range

MYSON HI-LINE is a range of high level, wall mounted fan convectors that can utilise unused space above a door. They provide rapid heat from above and incorporate technology that is generations ahead of the competition. HI-LINE connects easily to a central heating system.

- Range includes the discreet HI-LINE RC, the powerful HI-LINE SUPER RC and a low voltage 12V model
- Perfect for domestic and commercial applications, such as restaurants and offices
- HI-LINE RC and HI-LINE SUPER RC are fitted with digital controls and supplied with a handheld remote
- HI-LINE LV model is ideally suited to bathroom applications where safety matters most



HI-LINE SUPER RC

LO-LINE RC

MYSON LO-LINE RC is a low level, wall mounted fan convector that delivers high heat outputs, quickly. Ideal for areas such as conservatories, which feature limited wall space and require instant warmth during occasional use. Easily connects to an existing central heating system.

- Available in four sizes that increase in performance
- Fitted with digital controls and supplied with a handheld remote control








LO-LINE RC









HI-LINE RC

WALLMOUNT RANGE

General specification

- **CERTIFICATION**
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018. Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU. Outputs are tested to BS 4856 Part 1. Sound levels are tested to EN 23741.
- **GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- **COLOUR**
Finished in white (RAL 9016) powder coating.
- **ANTI-BACTERIAL PAINT**
Coating to suppress bacterial growth.
- **SYSTEM**
Closed circulation, 2 pipe pump assisted central heating systems.

- **CONNECTIONS**
15mm copper pipe (HI-LINE RC and LO-LINE RC), 22mm copper pipe (HI-LINE SUPER RC).
- **AIR VENTS**
Integrated with LO-LINE RC. Excluded from HI-LINE range.
- **OPERATING PRESSURES**
Tested to a pressure of 20 bar. Working pressure of up to 10 bar.
- **OPERATING TEMPERATURE**
Maximum 90°C.
- **ELECTRICAL SUPPLY**
220-240V - 50Hz fused at 3A.
- **DELIVERY**
2 - 5 working days.

For more general information, please see page 256.

Controls

HI-LINE RC, HI-LINE SUPER RC and LO-LINE RC units are supplied with an electronic infra-red remote control system with the following features:

- Automatic room temperature control
- Fan only option for ambient air circulation
- Three fan speeds
- Unit mounted controls and display
- Unit control panel electronic tamper proof lock
- Displayed temperature calibration system

HI-LINE LV units are fitted with a switch offering high and low fan speeds and off selection. A low limit thermostat is fitted to the unit to ensure that the fan stops after the heating system is switched off.



REMOTE CONTROL SUPPLIED (Excluding LV Model)




CONTROL PANEL (Excluding LV Model)

WALLMOUNT RANGE


Technical information

HI-LINE RC, HI-LINE LV dimensions & fixings

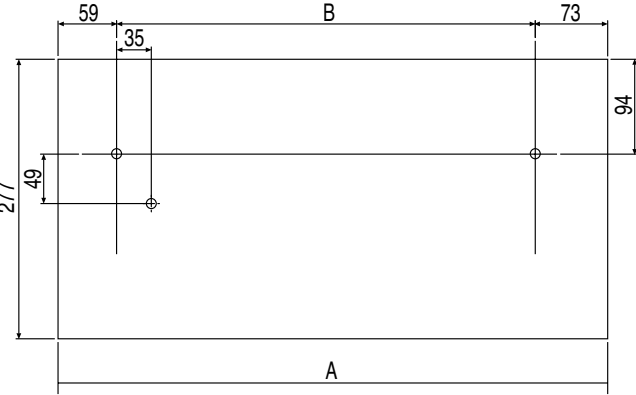

Model	A (mm)	B (mm)
7-4*	554	422
10-6	682	550
15-10	886	754
20-14	1171	1039

*HI-LINE LV only available as a 7-4 model

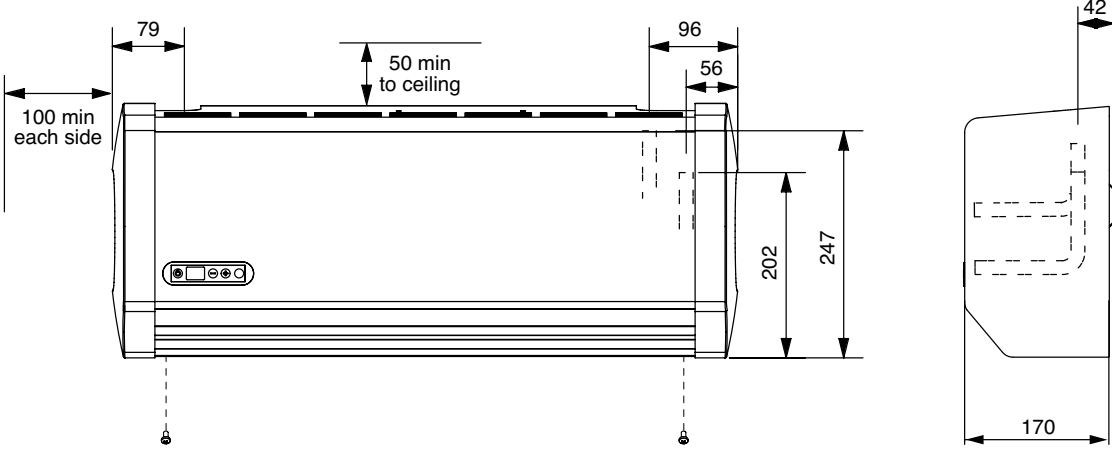


Case fixing screw positions and water connections

- Maximum installation height is 2.13m to the underside of the unit
 - Minimum installation height is 1.8m to the underside of the unit
 - Maximum ceiling height is 3m
 - Minimum clearance each side is 100mm
 - Minimum top clearance is 50mm
 - Please note the transformer is mounted inside the unit (LV model only)
- If installing the product above the recommended height consider adding additional margin to the heat loss, or install de-stratification fans.

WALLMOUNT RANGE

Technical information

HI-LINE SUPER RC dimensions & fixings

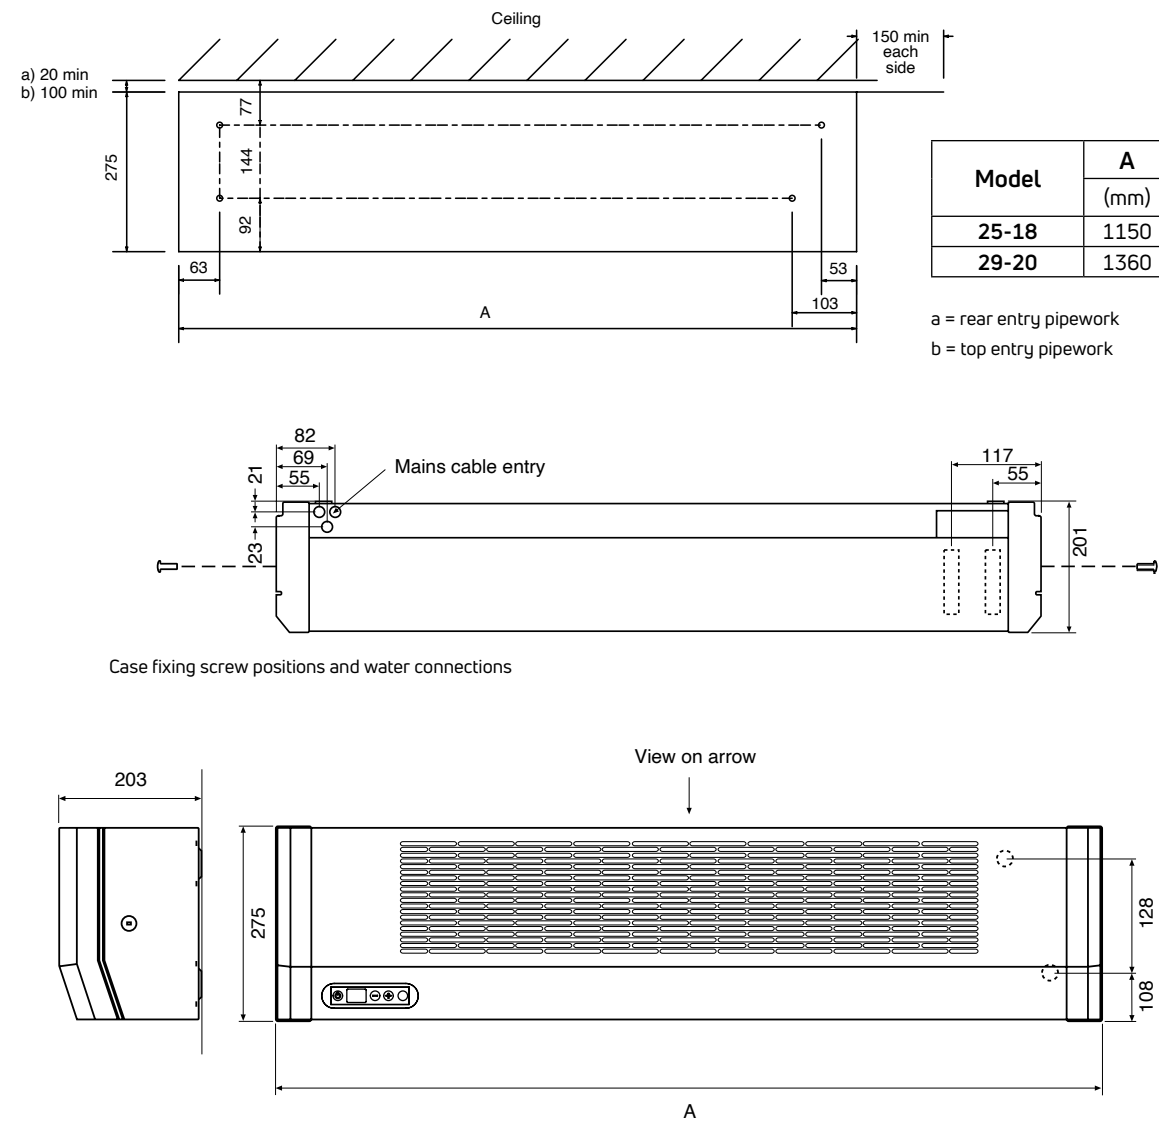


- Maximum installation height is 3m to the underside of the unit
- Minimum installation height is 1.8m to the underside of the unit
- Maximum ceiling height is 3.5m
- Minimum side clearance is 150mm

If installing the product above the recommended height consider adding additional margin to the heat loss, or install de-stratification fans.

Model	A
	(mm)
25-18	1168
29-20	1378

LO-LINE RC dimensions & fixings

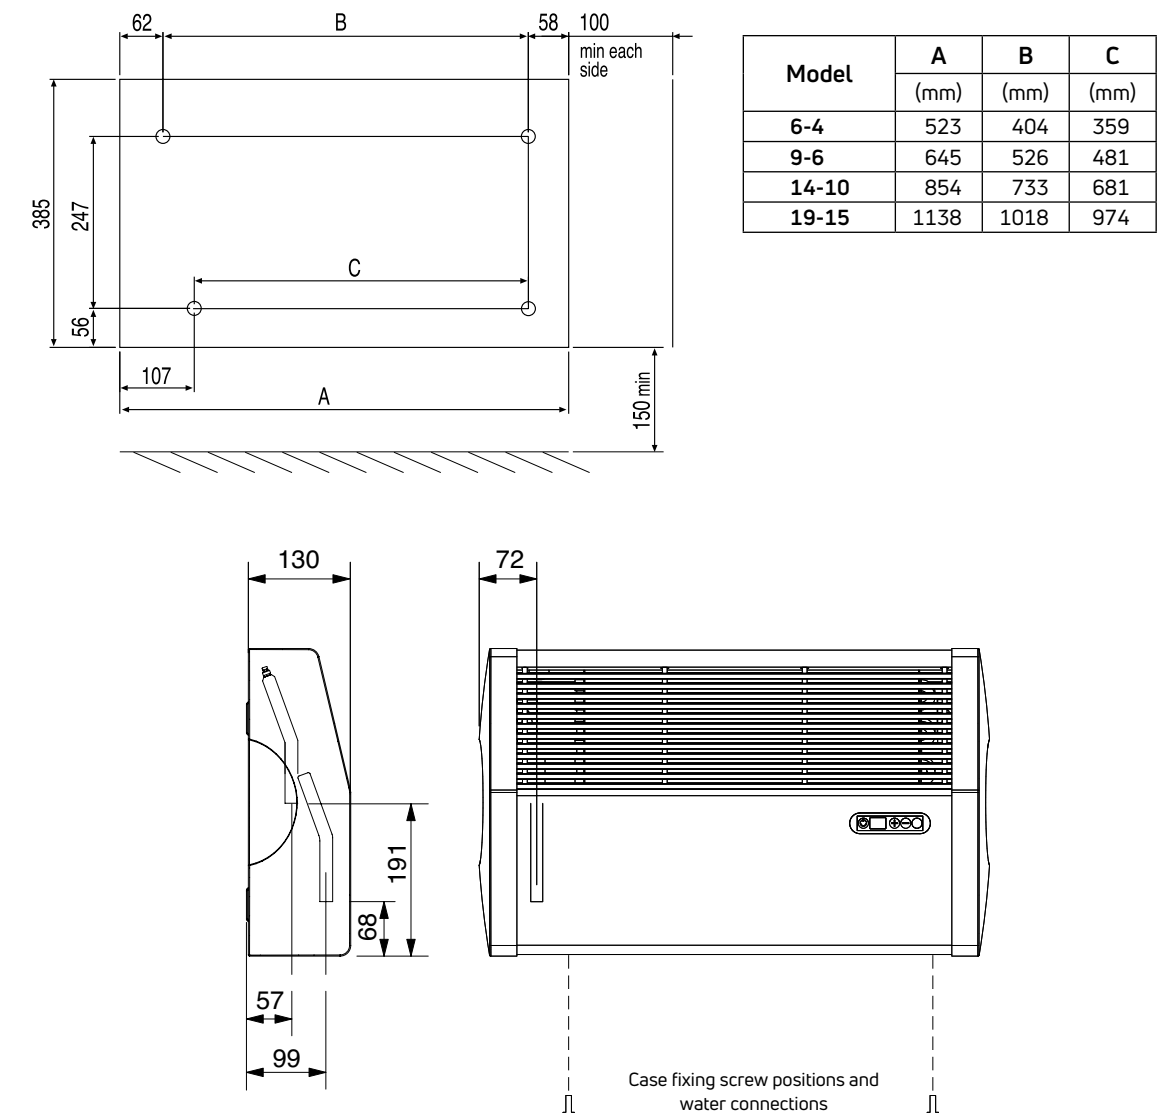

- Minimum installation height is 150mm to the underside of the unit
- Minimum clearance each side is 100mm

WALLMOUNT RANGE

Technical information (cont...)

		Fan Speed	Model						
			HI-LINE RC				HI-LINE SUPER RC		HI-LINE LV
			7-4	10-6	15-10	20-14	25-18	29-20	7-4
Dimensions	Nominal Height (mm)	-	277	277	277	277	275	275	277
	Nominal Depth (mm)	-	170	170	170	170	203	203	170
	Nominal Length (mm)	-	554	682	887	1171	1150	1360	554
Sound Levels*	Sound Pressure (dBA) (at 2.5m)	Normal	23.4	23.5	28.8	33.3	28.3	33.7	16.6
		Medium	32.5	30.8	35.4	38.7	37.8	36.8	-
		Boost	43.3	37.2	45.6	45.4	45.6	47.9	32.5
Weight, Water Content & Motor Power	Unpacked Weight (kg)	-	7.4	8.9	11.3	14.7	18.0	21.0	7.4
	Water Content (l)	-	0.30	0.32	0.56	0.77	0.63	0.85	0.3
	Motor Power (W - max.)	-	35	35	62	80	80	80	30
Air Flow Rates	Air Flow (m³/h)	Normal	81	143	207	285	350	390	81
		Medium	105	171	276	371	430	470	-
		Boost	133	220	333	431	500	540	133
	Air Flow (ft³/h)	Normal	2859	5048	7307	10061	12360	13772	2859
		Medium	3707	6036	9743	13096	15185	16597	-
		Boost	4695	7766	11755	15214	17657	19069	4695

		ltr/h	Model						
			HI-LINE RC				HI-LINE SUPER RC		HI-LINE LV
			7-4	10-6	15-10	20-14	25-18	29-20	7-4
Approximate Hydraulic Resistance	mm wg	455	1084	1240	1500	1774	2095	2551	1084
		341	798	657	905	1140	1282	1530	798
		227	350	327	450	565	620	850	350
		113	134	105	157	221	234	245	134
	kPa	455	9.4	12.12	14.7	17.42	20.5	24.6	9.4
		341	7.7	6.42	8.9	11.2	12.6	15.0	7.7
		227	3.5	3.25	4.37	5.5	6.1	8.3	3.5
		113	1.4	1.1	1.57	2.1	2.3	2.4	1.4

*Sound levels tested in accordance with EN 23741.

		Fan Speed	Model			
			LO-LINE RC			
			6-4	9-6	14-10	19-15
Dimensions	Nominal Height (mm)	-	385	385	385	385
	Nominal Depth (mm)	-	130	130	130	130
	Nominal Length (mm)	-	523	645	854	1138
Sound Levels*	Sound Pressure (dBA) (at 2.5m)	Normal	23.7	21.6	23.1	27.2
		Medium	31.7	29.6	28.5	31.8
		Boost	40.7	38	40.1	38.6
Weight, Water Content & Motor Power	Unpacked Weight (kg)	-	7.7	9.1	12.7	15.7
	Water Content (l)	-	0.3	0.32	0.56	0.75
	Motor Power (W - max.)	-	35	35	62	80
Air Flow Rates	Air Flow (m³/h)	Normal	65	112	160	241
		Medium	86	129	200	288
		Boost	122	175	288	335
	Air Flow (ft³/h)	Normal	2295	3954	5648	8507
		Medium	3036	4554	7060	10166
		Boost	4307	6178	10166	11826

		ltr/h	Model			
			LO-LINE RC			
			6-4	9-6	14-10	19-15
Approximate Hydraulic Resistance	mm wg	455	910	998	1240	1670
		340	514	520	719	954
		227	235	121	324	469
		113	47	97	75	77
	kPa	455	8.98	9.85	12.20	16.40
		340	5.06	5.10	7.00	9.40
		227	2.35	1.18	3.20	4.60
		113	0.45	0.97	0.75	0.82

*Sound levels tested in accordance with EN 23741.

WALLMOUNT RANGE

Heat outputs

HI-LINE RC

Model	Fan Speed	Heat Outputs @ ΔT 50°C		Heat Outputs @ ΔT 30°C		Order Code
		Watts	Btu/h	Watts	Btu/h	
HI-LINE RC 7-4	Normal	930	3172	541	1845	HIRC7
	Medium	1292	4410	752	2565	
	Boost	1702	5808	991	3380	
HI-LINE RC 10-6	Normal	1610	5493	937	3197	HIRC10
	Medium	1959	6683	1140	3889	
	Boost	2521	8602	1467	5005	
HI-LINE RC 15-10	Normal	2459	8390	1431	4881	HIRC15
	Medium	2783	9496	1620	5526	
	Boost	3690	12590	2147	7327	
HI-LINE RC 20-14	Normal	3468	11831	2018	6884	HIRC20
	Medium	4380	14944	2548	8695	
	Boost	4959	16921	2889	9858	

HI-LINE SUPER RC

HI-LINE SUPER RC 25-18	Normal	4270	14569	2563	8746	2HI25
	Medium	5238	17873	3030	10339	
	Boost	6200	21154	3454	11785	
HI-LINE SUPER RC 29-20	Normal	4962	16930	2870	9791	2HI29
	Medium	6011	20508	3462	11811	
	Boost	7045	24037	4040	13785	

HI-LINE LV

HI-LINE LV 7-4	Normal	930	3173	541	1846	HILV
	Boost	1702	5807	991	3381	

LO-LINE RC

LO-LINE RC 6-4	Normal	916	3126	564	1923	LORC6
	Medium	1043	3558	641	2187	
	Boost	1437	4904	883	3014	
LO-LINE RC 9-6	Normal	1358	4633	834	2847	LORC9
	Medium	1777	6064	1093	3728	
	Boost	2240	7643	1377	4699	
LO-LINE RC 14-10	Normal	2377	8111	1461	4986	LORC14
	Medium	2928	9989	1800	6140	
	Boost	3467	11829	2131	7272	
LO-LINE RC 19-15	Normal	3613	12327	2221	7578	LORC19
	Medium	4144	14140	2548	8692	
	Boost	4640	15831	2852	9731	

Heat outputs tested in accordance with BS 4856 Part 1.

Flow Rate (all products): 340 ltr/h (75 gal/h)

Flow Rate Correction Factors:

(HI-LINE RC, HI-LINE LV & LO-LINE RC)

455 ltr/h (100 gal/h) multiply output by 1.06

227 ltr/h (50 gal/h) multiply output by 0.96

113 ltr/h (25 gal/h) multiply output by 0.85

Flow Rate Correction Factors:

(HI-LINE SUPER RC)

455 ltr/h (100 gal/h) multiply output by 1.03

227 ltr/h (50 gal/h) multiply output by 0.98

113 ltr/h (25 gal/h) multiply output by 0.85



The latest generation of iVECTOR is even more quiet, even more efficient and even more intelligent than ever before. With a new extended range, there are even more options available when selecting your iVECTOR.

iVECTOR MKII maintains all the benefits of the previous model with the same great looks and high performance but now comes with an improved motor, an improved fan and improved software, making it the most intelligent fan convector we have ever made. This underlies MYSON's commitment to continuously innovate and improve our products.

The iVECTOR is a popular choice within the commercial sector, having been installed in a variety of locations, such as schools, universities, care homes and retail facilities.



High outputs

The iVECTOR has a large surface area heat exchanger. This feature, combined with forced convection from its in-built fan, produces high heat outputs.



Rapid heat

The iVECTOR has a lower water content resulting in faster heat up times.



Silent

The iVECTOR now comes with an aluminium fan which reduces sound levels making it operate virtually silently.



More efficient

The upgraded motor makes the new iVECTOR up to 89% more efficient than the previous version. This high efficiency results in lower power consumption, saving money and energy.



Cooling

When connected to a chilled water supply it can rapidly cool spaces as well.



More choice

As well as the standard Type BC there are now even more models available with a no controls version (Type BN) as well as a floor version (Type FC/FN), by special order.



iVECTOR MKII



iVECTOR TYPE BC

Both of these products give the same output



iVECTOR TYPE BC


SELECT COMPACT

iVECTOR TYPE BC



IVECTOR MKII


How it works

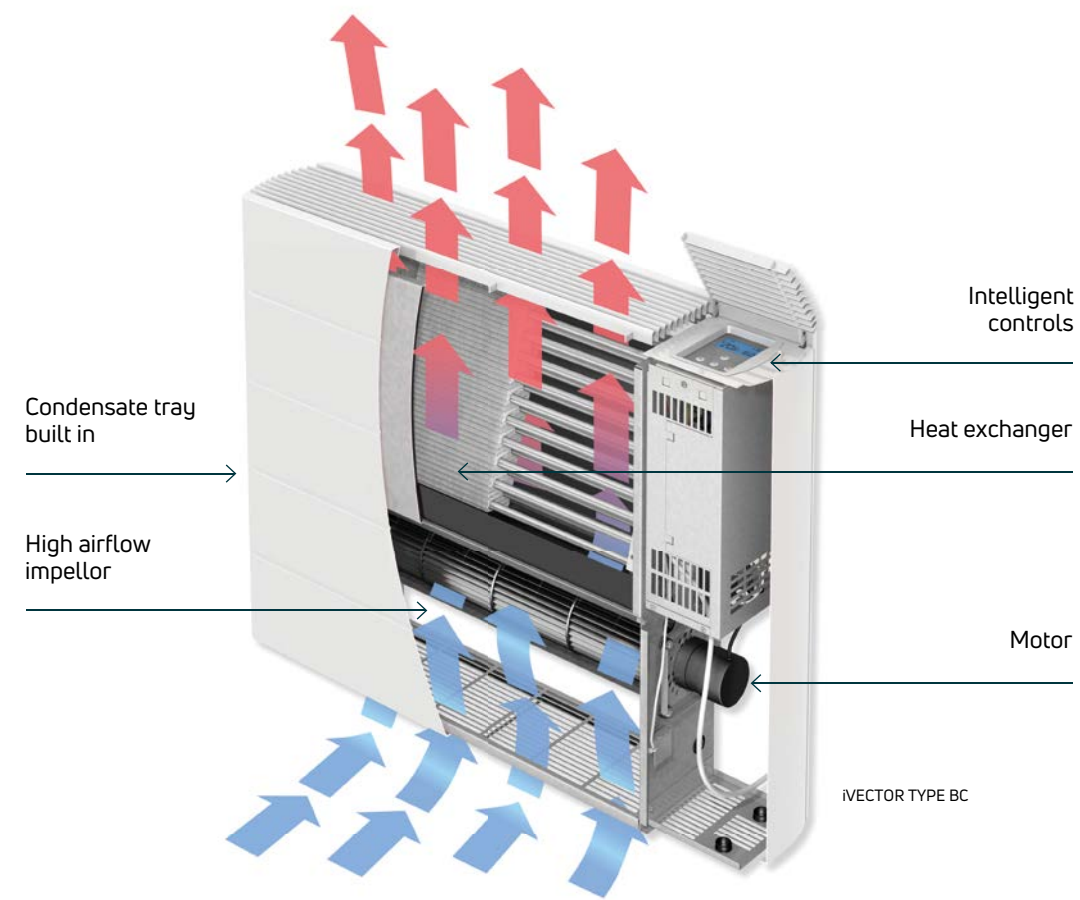

Controls

Intelligent and easy to use controls

- Intelligent, flexible controls that can be set to easy or full mode
- Easy mode allows basic function such as comfort mode and manual fan speed selection
- Full mode allows more advanced functions
- 24/7 programmer with 1 hour time intervals
- Night set-back function
- Holiday function
- Lockable LCD backlit display
- 20 fan speeds in comfort mode for seamless fan switching
- Option to adjust water set points (default, heating = 32°C, cooling = 15°C)

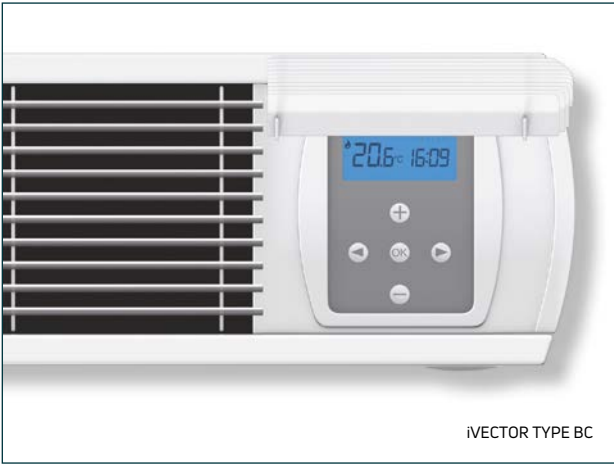

IVECTOR MKII

Complete range

TYPE BC

Model with standard controls.

inlet outlet

integrated controls stocked

TYPE BN

A "no controls" version of the BC model.

inlet outlet

no controls made to order

TYPE FC

A front grille model that comes with controls.

inlet outlet

integrated controls made to order integrated controls reduced floor clearance

TYPE FN

A "no controls" version of the FC model.

inlet outlet

no controls made to order integrated controls reduced floor clearance

iVECTOR MKII

General specification & technical information


- CERTIFICATION**
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018. Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU. Outputs are tested to BS 4856 Part 1. Sound levels are tested to EN 23741.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016) powder coating.
- ANTI-BACTERIAL PAINT**
Coating to suppress bacterial growth.
- SYSTEM**
Closed circulation, 2 pipe pump assisted central heating systems.
- CONNECTIONS**
2 x 3/4" internal thread connections on 2 pipe versions.
4 x 3/4" internal thread connections on special 4 pipe versions.
- AIR VENTS**
Integrated.
- OPERATING PRESSURES**
Tested to a pressure of 20 bar.
Working pressure of up to 10 bar.
- OPERATING TEMPERATURE**
Maximum 85°C.
- ELECTRICAL SUPPLY**
220-240V - 50Hz fused at 3A.
- DELIVERY**
Stocked items (Type BC - 2 pipe): 2 - 5 working days.
Non-stocked items (Type BC - 4 pipe and Types BN, FC, FN - 2 & 4 pipe): 2 - 4 weeks.

For more general information, please see page 256.

		Fan Speed	Model				
			iV60v080	iV60v100	iV60v120	iV60v140	iV60v160
Dimensions	Nominal Height (mm)	-	600	600	600	600	600
	Nominal Depth (mm)	-	153	153	153	153	153
	Nominal Length (mm)	-	800	1000	1200	1400	1600
Sound Levels*	Sound Pressure (dBA) (at 2.5m)	Min	20.9	22.5	20.9	21.1	21.9
		Max	39.9	42.0	41.2	44.9	43.3
Motor Power (W)		Min	3.5	3.6	3.8	4.5	4.6
		Max	13	18.5	23	30	35
Weight & Water Content†	2 Pipe Water Content (l)	-	0.66	0.92	1.19	1.45	1.72
	4 Pipe Water Content (l)	-	0.33	0.46	0.6	0.73	0.86
	2 Pipe Unpacked Weight (kg)	-	22.8	27.7	32.5	37.5	42.6
	4 Pipe Unpacked Weight (kg)	-	24.8	30.1	35.3	40.7	46.2
Air Flow Rates	Heating	Min	90	135	180	225	270
	Air Flow (m³/h)	Max	247	370	493	616	740
	Cooling	Min	65	98	130	163	195
	Air Flow (m³/h)	Max	202	302	403	504	605
		Flow (l/h)	Model				
			iV60v080	iV60v100	iV60v120	iV60v140	iV60v160
Flow Rates/ Pressure Losses	Pressure Drop (kPa) (2 Pipe Heating/Cooling & 4 Pipe Cooling)	330	6.1	8.5	11.1	12.2	14.2
		500	13	17.8	22.9	24.9	28.7
		750	27.5	36.5	46.2	49.8	57.1
	Pressure Drop (kPa) (4 Pipe Heating)	330	12.2	17	22.2	24.4	28.4
		500	26	35.6	45.8	49.8	57.4

* Sound levels tested in accordance with ISO 3741. Sound performance figures shown are at fan speeds via controls unit and may differ with external controller.
† 2 pipe water content = 2 pipe heating/cooling or 4 pipe cooling and 4 pipe water content = 4 pipe heating.

Mounting positions & dimensions

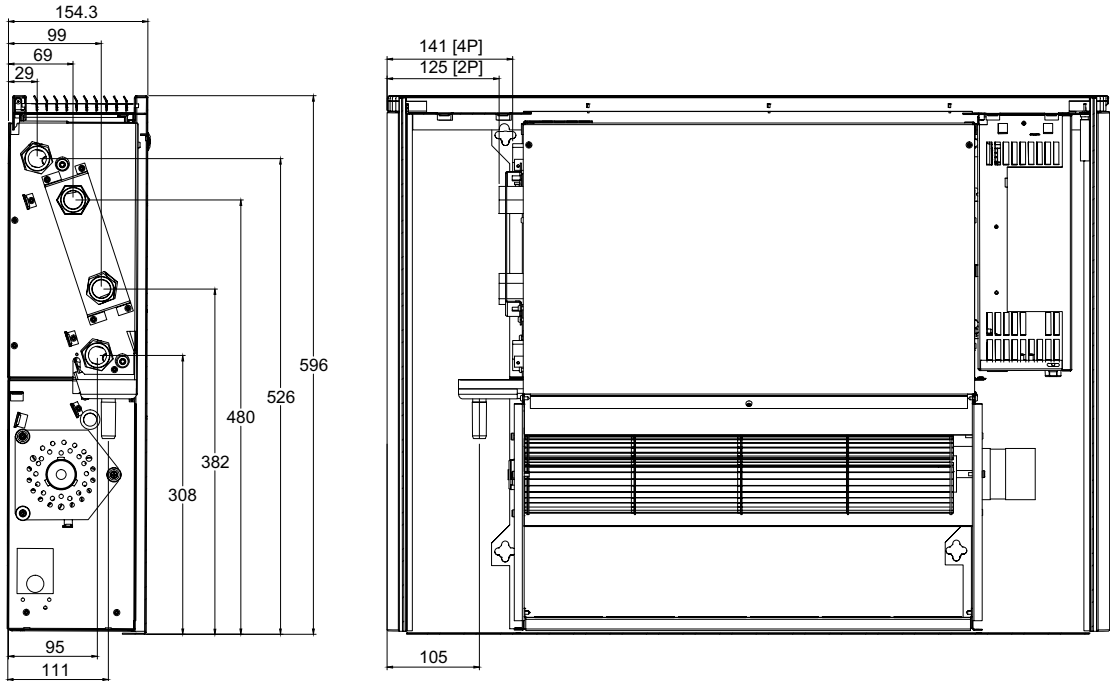

Connections

2 Pipe




4 Pipe





Underfloor heating


Underfloor heating has been gaining popularity and is widely acknowledged as one of the most effective and efficient methods of heating. It has become the fastest growing market for both domestic and commercial heating sectors. As one of Europe's leading names in heating technology, MYSON FLOORTEC underfloor heating is at the forefront of the underfloor revolution. In addition to our manufacturing and technical expertise, we provide full planning, design and supply services to help you achieve your perfect home.

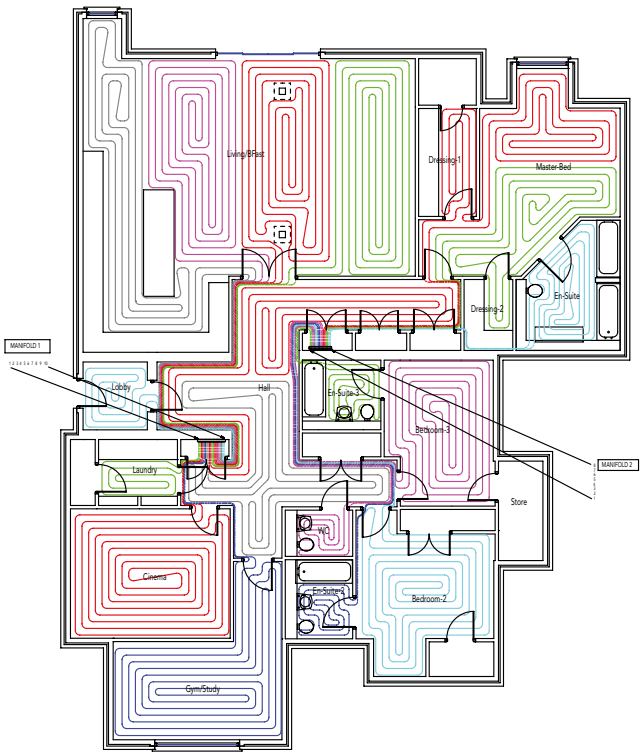

How it works

MYSON FLOORTEC underfloor heating works by heating your home from the floor upwards. This form of radiant heating is different to the convected heat provided by radiators, which works by drawing cold air across your floor, heating it and then convecting it upwards.

The main advantage of MYSON FLOORTEC underfloor heating is its high level of performance. Radiant heat means that the warmth is concentrated where you need it most. You'll enjoy uniform heat, with no cold spots or draughts, and it's perfect for comfort - you won't get cold feet and you will keep a cool head.

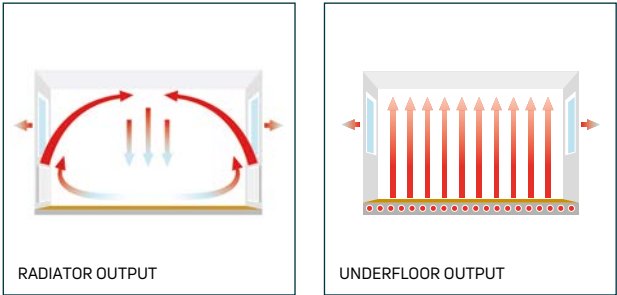

Quotation service

MYSON FLOORTEC underfloor heating pride ourselves on our market leading service. We offer a free 48hr quotation service that couldn't be easier. We do all the calculations for you and prepare a detailed quotation. All you need to do is send us your architect's floor plans or measurements and we'll take care of the rest.

E-mail your drawings to: underfloor@myson.co.uk

Post your drawings to:

Myson FLOORTEC Underfloor Heating
Eastern Avenue
Team Valley
Gateshead
Tyne & Wear
NE11 0PG

Alternatively you can call us on **0330 041 5474**

Design service

MYSON FLOORTEC underfloor heating provide a full design service, tailored to individual requirements. Our unique design will relate to your project, however large or small, and will make the installation of our underfloor heating even easier.

Our complete design service starts with an assessment of the customer's needs. We use architects plans to assess heat loss requirements and produce a computerised design of the most efficient layout.

This design service is completely free and carried out by our technical experts, who have years of experience in designing underfloor heating systems. As we are the only

total solutions provider, we can also offer unbiased advice about other forms of heating. For example, it may be more effective to combine underfloor heating with radiators or other heat emitters. If this is the case, then we will provide you with a fully integrated design that includes both underfloor heating and radiators.

All we need to produce your designs are the full architectural drawings. All our drawings are advisory only based on our years of heating expertise.



Quality guaranteed

Every component of a MYSON FLOORTEC Complete Underfloor Heating System has undergone thousands of test cycles. Our underfloor heating systems are regularly assessed for quality by independent international institutions and consistently achieve top marks and quality certificates.

- Guaranteed for all operating conditions
- MYSON is a Member of BEAMA
- All electrical components carry a 2 year warranty from date of installation
- MYSON FLOORTEC offer a comprehensive 10 year pipe warranty
- The Premium Pump Pack comes complete with a 2 year warranty

*Terms and conditions apply. Contact our Underfloor Heating Team for further information.

**MYSON FLOORTEC cannot be held responsible for problems arising from poorly installed systems. All installations must be fitted in accordance with the CIBSE Underfloor Heating Design and Installation Guide 2004.

Complete System Guarantee*

MYSON FLOORTEC underfloor heating also offer a 10 year Complete System Guarantee* that promotes the advantages of both tried and tested component compatibility and correct system design. We are confident that, when installed correctly**, our systems will perform to the highest standards, so eliminating unnecessary problems. Buy a bespoke system from MYSON and our Complete System Guarantee means you will benefit from complete peace of mind.



Training

MYSON FLOORTEC underfloor heating offers free training workshops for installers or developers to show how easy it is to install our underfloor heating systems.

Training takes place at our head office in Gateshead and is carried out by our technical experts, who have years of experience designing and installing underfloor heating systems.

To find out when the next training session is, call **0330 041 5474** or e-mail underfloor@myson.co.uk


After sales service

Our first class service doesn't stop once we've sold our systems. We want our customers to enjoy the benefits of our systems to the full, and as such we offer a special ServicePlus after sales service.

Our ServicePlus technical support team are available to help you get the most out of our products. Our helpful team of technical advisors are always on hand to answer any questions regarding MYSON FLOORTEC underfloor heating.

We offer:

- Swift and practical advice from our experts
- Comprehensive customer service
- Free training at our dedicated UK training facility
- Special onsite support service from our experienced sales team
- Shared knowledge and expertise
- Free support for all partners

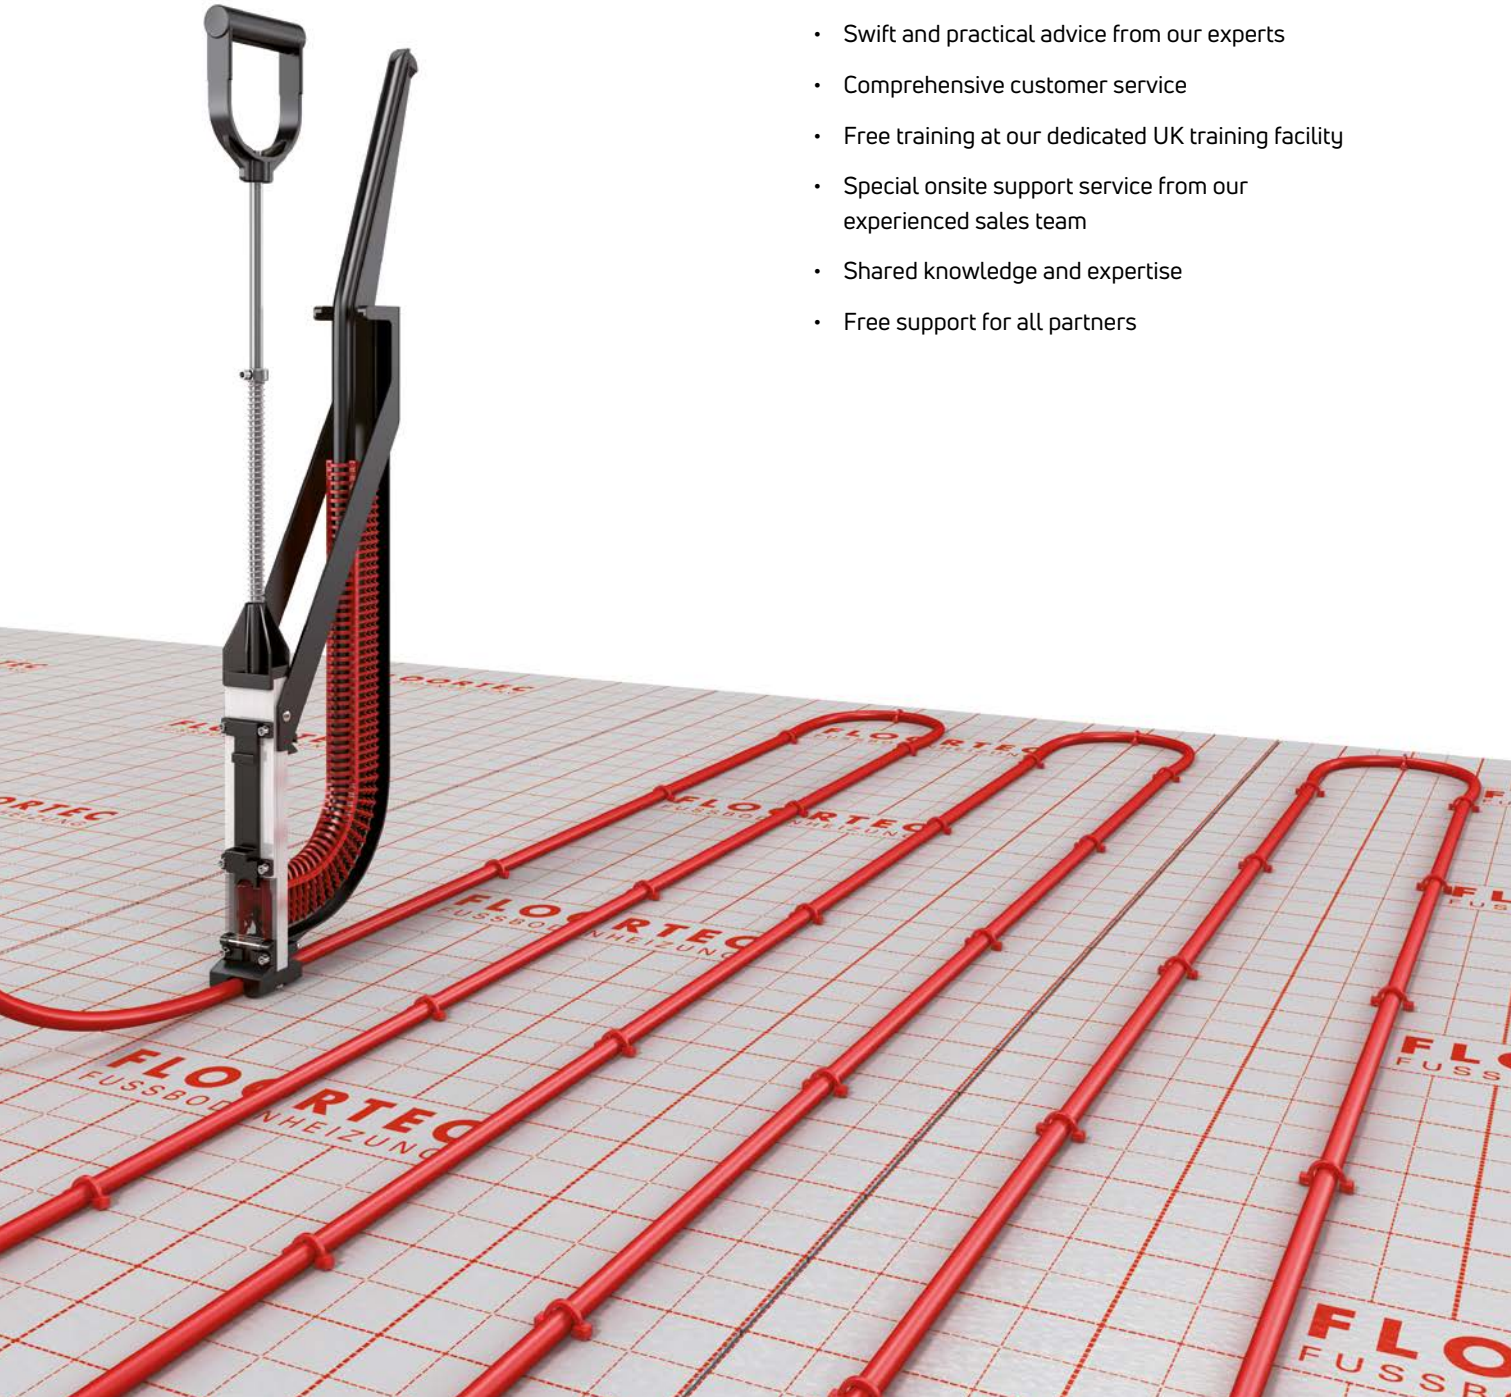



FIXING SYSTEMS


MYSON FLOORTEC underfloor heating offer a full and comprehensive range of fixing systems for all floor types. Our systems are suitable for any project, and include solutions for solid, suspended, floating and retrofit floors.


SOLID FLOORS are a common type of floor system and are cost effective for underfloor heating. Underfloor heating pipes are embedded into concrete or screed.

SUSPENDED FLOORS include joisted floors with conventional joists supported on end walls of sleeper walls as well as solid floors with battens fixed to the floor.

FLOATING FLOOR structures are ideal for underfloor heating as they have a low thermal mass and therefore a rapid response to changes in temperature.


RETROFIT FLOORS allow you to install underfloor heating in older and existing properties without the need for expensive excavation.

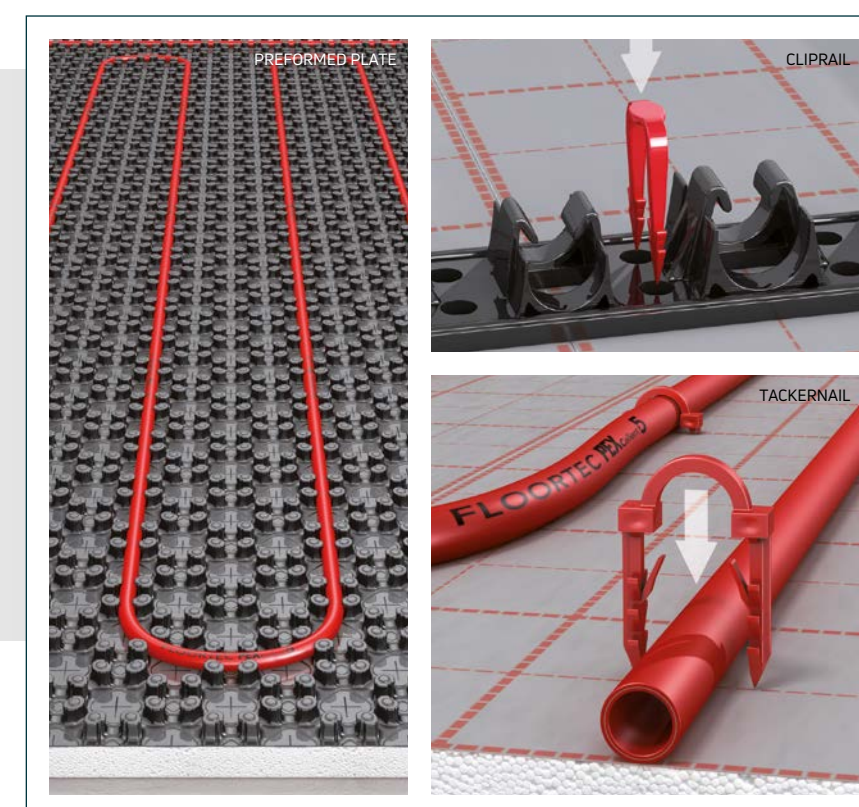



TACKERNAIL

MYSON FLOORTEC underfloor heating Tackernails are exclusive to MYSON, and are the strongest nail solution available. The Tackernail system is suitable for solid floor types.

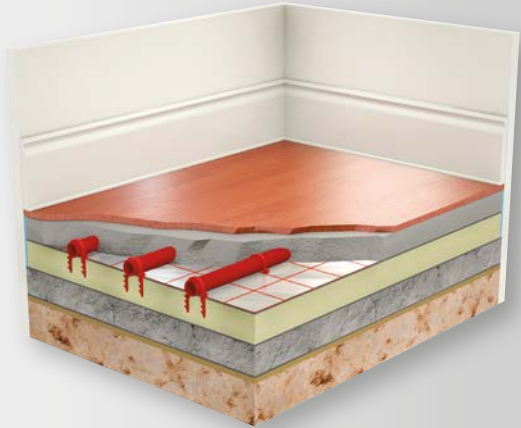

The Tackernail is made entirely out of plastic so there is no clogging from sticking tape. It also has more barbs, so there is no worry about nails lifting. The pipe is positioned in place and the Tackernail is fixed over the pipe using a MYSON FLOORTEC Tackertool. The Tackertool is specifically designed to work with our Tackernails for easy and efficient operation. It can be purchased or rented from MYSON FLOORTEC.

Tackernail and Tackertool have been designed with the installer in mind, as it is a fast and effective method of anchoring the MYSON FLOORTEC underfloor heating pipework. It is also very flexible allowing both spiral and serpentine laying patterns.

Please note: No floor insulation is supplied with this fixing system.





CLIPRAIL

Cliprail systems are for use on solid floor types. The Cliprails are designed to attach the MYSON FLOORTEC underfloor heating pipework to floor insulation (supplied by others) using the adhesive and Cliprail pins supplied.




The Cliprail consists of a robust, u-shaped channel that is 1m in length, with fixing positions every 50mm.

This is a fast and cost effective method of installing underfloor heating and is suitable for both traditional and liquid screeds. The pipe is installed in a serpentine laying pattern.

Please note: No floor insulation is supplied with this fixing system.



 **DELIVERY**
2 - 5 working days.

Description	Order Code
3D Medium (42mm) Tackernail* (Box of 400)	50251
3D Long (58mm) Tackernail* (Box of 400)	50252
3D Tackertool UNI	50253
Red Insulated Pipe Sleeve (20m Roll)	50069
Flexible Pipe Cover (400mm Length)	50078
Expansion Profile (2m)	50076
Expansion Joint Strip (2m)	50077
Border Insulation (30m Roll)	50220
Screed Tape (75m Roll)	50226
25mm PS20 Flatpack Insulation (10m²)	50325

*Tackernails are only compatible with the 3D Tackertool UNI.

 **DELIVERY**
2 - 5 working days.

Description	Order Code
17mm Black Cliprail (1m length)	50706
50mm Red Cliprail Pins (Pack of 500)	50710
Anchor Clips	50228
Red Insulated Pipe Sleeve (10m Roll)	50069
Flexible Pipe Cover (400mm Length)	50078
Expansion Profile (2m)	50076
Expansion Joint Strip (2m)	50077
Border Insulation (30m Roll)	50220
Screed Tape (75m Roll)	50226

UNDERFLOOR HEATING



PREFORMED PLATE


Preformed Plate is a fast and effective fixing system and is ideal for single person installations. It is suitable for solid floor types.



It is a castellated fixing system that comprises of an expanded 11mm polystyrene insulation base with raised burls that are designed to firmly grip the MYSON FLOORTEC underfloor heating pipe. The pipe is fixed easily into the desired pattern by lightly pressing with your foot.

It is suitable for 14 - 17mm pipework and is very flexible, allowing both spiral and serpentine laying patterns.



 **DELIVERY**
2 - 5 working days.

Description	Order Code
Preformed Plate 14 to 17mm Pipe (1500 x 800mm)	50236
Foam Perimeter Tube (100m)	50237
Red Insulated Pipe Sleeve (10m Roll)	50069
Flexible Pipe Cover (400mm Length)	50078
Expansion Profile (2m)	50076
Expansion Joint Strip (2m)	50077
Border Insulation (30m Roll)	50220



NAKED PREFORMED PLATE

Naked Preformed Plate is a fast and effective fixing system and is ideal for single person installations. It is suitable for solid floor types.



It excludes the 11mm polystyrene insulation that comes with Preformed Plate and is a cost-effective alternative. It is more streamlined and therefore ideal for areas where space is critical. It is a castellated fixing system with raised burls that are designed to firmly grip the MYSON FLOORTEC underfloor heating pipe. The pipe is fixed easily into the desired pattern by lightly pressing with your foot.


It is suitable for 14 - 17mm pipework and is very flexible, allowing both spiral and serpentine laying patterns.



 **DELIVERY**
2 - 5 working days.


Description	Order Code
Naked Preformed Plate 14 to 17mm Pipe (1440 x 840mm)	50537
Fixing Dowel	50538
Red Insulated Pipe Sleeve (20m Roll)	50069
Flexible Pipe Cover (400mm Length)	50078
Expansion Profile (2m)	50076
Expansion Joint Strip (2m)	50077
Border Insulation (30m Roll)	50220
Foam Perimeter Tube (100m)	50237

UNDERFLOOR HEATING



MICROPLATE

Suitable for multiple build types, achieving the appearance, functionality and performance of a solid floor.




MICROPLATE WITH INSULATION ABOVE SLAB

The MicroPlate panel can easily be installed by a single person. MicroPlate is a secure pipe holder and becomes an integral part of the floor structure once latex screed has been applied, making the plate resistant to impact. Ultra low lift system at only 15mm utilising a 12mm pipe.




MICROPLATE WITH INSULATION BELOW SLAB

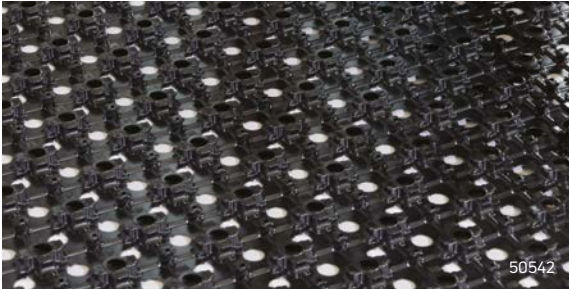


 **DELIVERY**
2 - 5 working days.

Description	Order Code
15mm MicroPlate panel with adhesive (1000 x 600mm)	50542




TACKER

Tacker fixing system is suitable for solid floor types and incorporates all the advantages of our Tackernail fixing system.




It is supplied with 25mm insulation with a webbing foil bonded to the surface. This foil acts as a protective layer, but also helps to assist the positioning of the pipework with a handy 50mm grid marked on. The pipe is then positioned in place using our exclusive Tackernails and Tackertool. It is also very flexible allowing both spiral and serpentine laying patterns.

The Tackernail is made entirely out of plastic so there is no clogging from sticking tape. It also has more barbs, so there is no worry about nails lifting. The Tackertool is specifically designed to work with our Tackernails for easy and efficient operation. It can be purchased or rented from MYSON FLOORTEC.

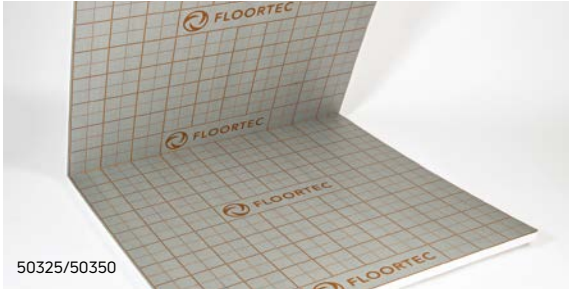

50325/50350



50252



50253

 **DELIVERY**
2 - 5 working days.

Description	Order Code
25mm PS20 Flatpack Insulation (10m ²)	50325
3D Medium (42mm) Tackernail* (Box of 400)	50251
3D Long (58mm) Tackernail* (Box of 400)	50252
3D Tackertool UNI	50253
Red Insulated Pipe Sleeve (20m Roll)	50069
Flexible Pipe Cover (400mm Length)	50078
Expansion Profile (2m)	50076
Expansion Joint Strip (2m)	50077
Border Insulation (30m Roll)	50220
Screed Tape (75m Roll)	50226

*Tackernails are only compatible with the 3D Tackertool UNI.



PLATED

Suspended floor systems include both joisted floors with conventional joists supported on end walls of sleeper walls, as well as solid floors with battens fixed to the floor.



50550



SUBPLATE

MYSON SUBPLATE is suitable for use on both traditional and composite joists and is ideal for situations where the floor coverings are already in place.



50555

The underfloor heating system consists of aluminium diffusion plates fitted between joists or battens. These are grooved to accept the underfloor heating pipework. The aluminium plate is used for its excellent thermal conduction as well as its low weight. It is suitable for 16 and 17mm pipework.



50548



50548

This system consists of an aluminium diffusion plate, fitted on the underside of the floor between the joists.

SUBPLATE is available in two width sizes, 150mm and 250mm, giving pipe centre flexibility depending on your joist configuration. For advice on using this system in alternative configurations, please speak with our technical department on **0330 041 5474**.



50555



50556



DELIVERY
2 - 5 working days.

Description	Order Code
Double Floor Plate (1000 x 388mm)	50550
3 Channel Floor Plate (1000 x 388mm)	50548
3 Channel Floor Plate (1000 x 588mm)	50553




DELIVERY
2 - 5 working days.

Description	Order Code
SUBPLATE (250 x 1000mm)	50555
SUBPLATE (150 x 1000mm)	50556




FLOATING FLOOR

The MYSON FLOORTEC floating floor system has been uniquely developed to meet the increasing demand for this type of flooring structure.

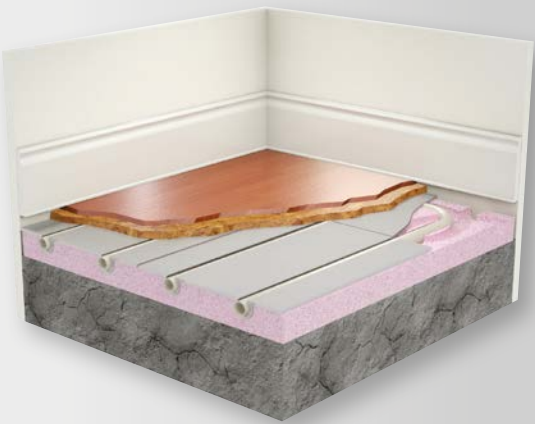

MICROBOARD

MICROBOARD, from MYSON FLOORTEC, is a retrofit, low profile underfloor heating system. It can be installed over an existing floor, or be used as part of a new build project, making it our most flexible system yet.

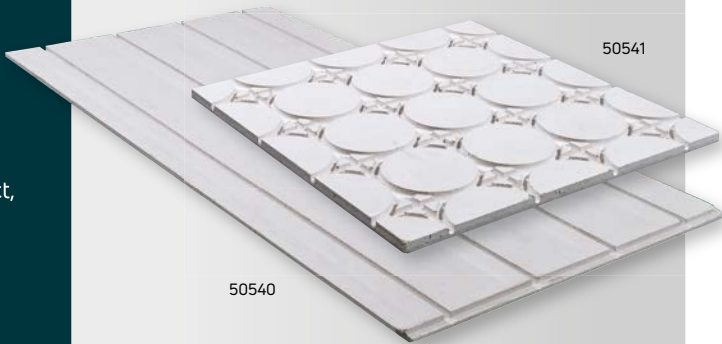

Floating floor systems have a low thermal mass and consequently have a swift response time to changes in temperature. Floating floors also reduce the overall load on the building, minimising the weight of the floor compared to the other floor systems. It is suitable for 16mm multi-layer pipework only.

The grooves are designed to accept MYSON FLOORTEC preformed aluminium diffusion plates, which spread the heat laterally across the floor from the heating pipework.

Technical data

	30/40/50mm Panel
Nominal Density (Kg/m³)	30
Thermal Conductivity (W/mK)	0.029
Minimum Compressive Strength (kPa)	200
Long Term Static Load (kPa)	Design Loads*
Occasional Loading (kPa)	Design Loads*
Water Vapour Resistance (MNs/gm)	480
Moisture Absorption (by vol.)	0.3%
Continuous Service Temp Limits (°C)	-50 to +75

*Design loads by calculated methods (BBA)



DELIVERY
2 - 5 working days.

Description	Order Code
30mm XPS Floating Floor Panel (2400 x 1200mm)	50545
40mm XPS Floating Floor Panel (2400 x 1200mm)	50546
50mm XPS Floating Floor Panel (2400 x 1200mm)	50547
Flat Floor Plate (1000 x 400mm)	50552
Double Floor Plate (1000 x 388mm)	50550
Compact Pipe De-Coiler	50018
Hot Cutter	50008
Replacement Hot Cutter Blade	50007

At only 18mm in depth it allows for underfloor heating to be easily installed into older and existing properties without the need for expensive and disruptive excavation.

It is available in two panel types, straight and return, and our 12mm PEXcellent5 pipe is easily laid into the panels.


Technical data

	18mm Board
Density (Kg/m³)	1150±50
Thermal Conductivity (W/mK)	0.32
Minimum Compressive Strength (kPa / N/mm²)	8500 / 8.5
Airborne Sound (Rw)	28dB
Impact Sound (Ln,w)	86dB
Specific Heat Capacity (kJ/kgK)	1.1



DELIVERY
2 - 5 working days.

Description	Order Code
Straight Board (1200 x 600 x 18mm)	50540
Return Board (600 x 600 x 18mm)	50541

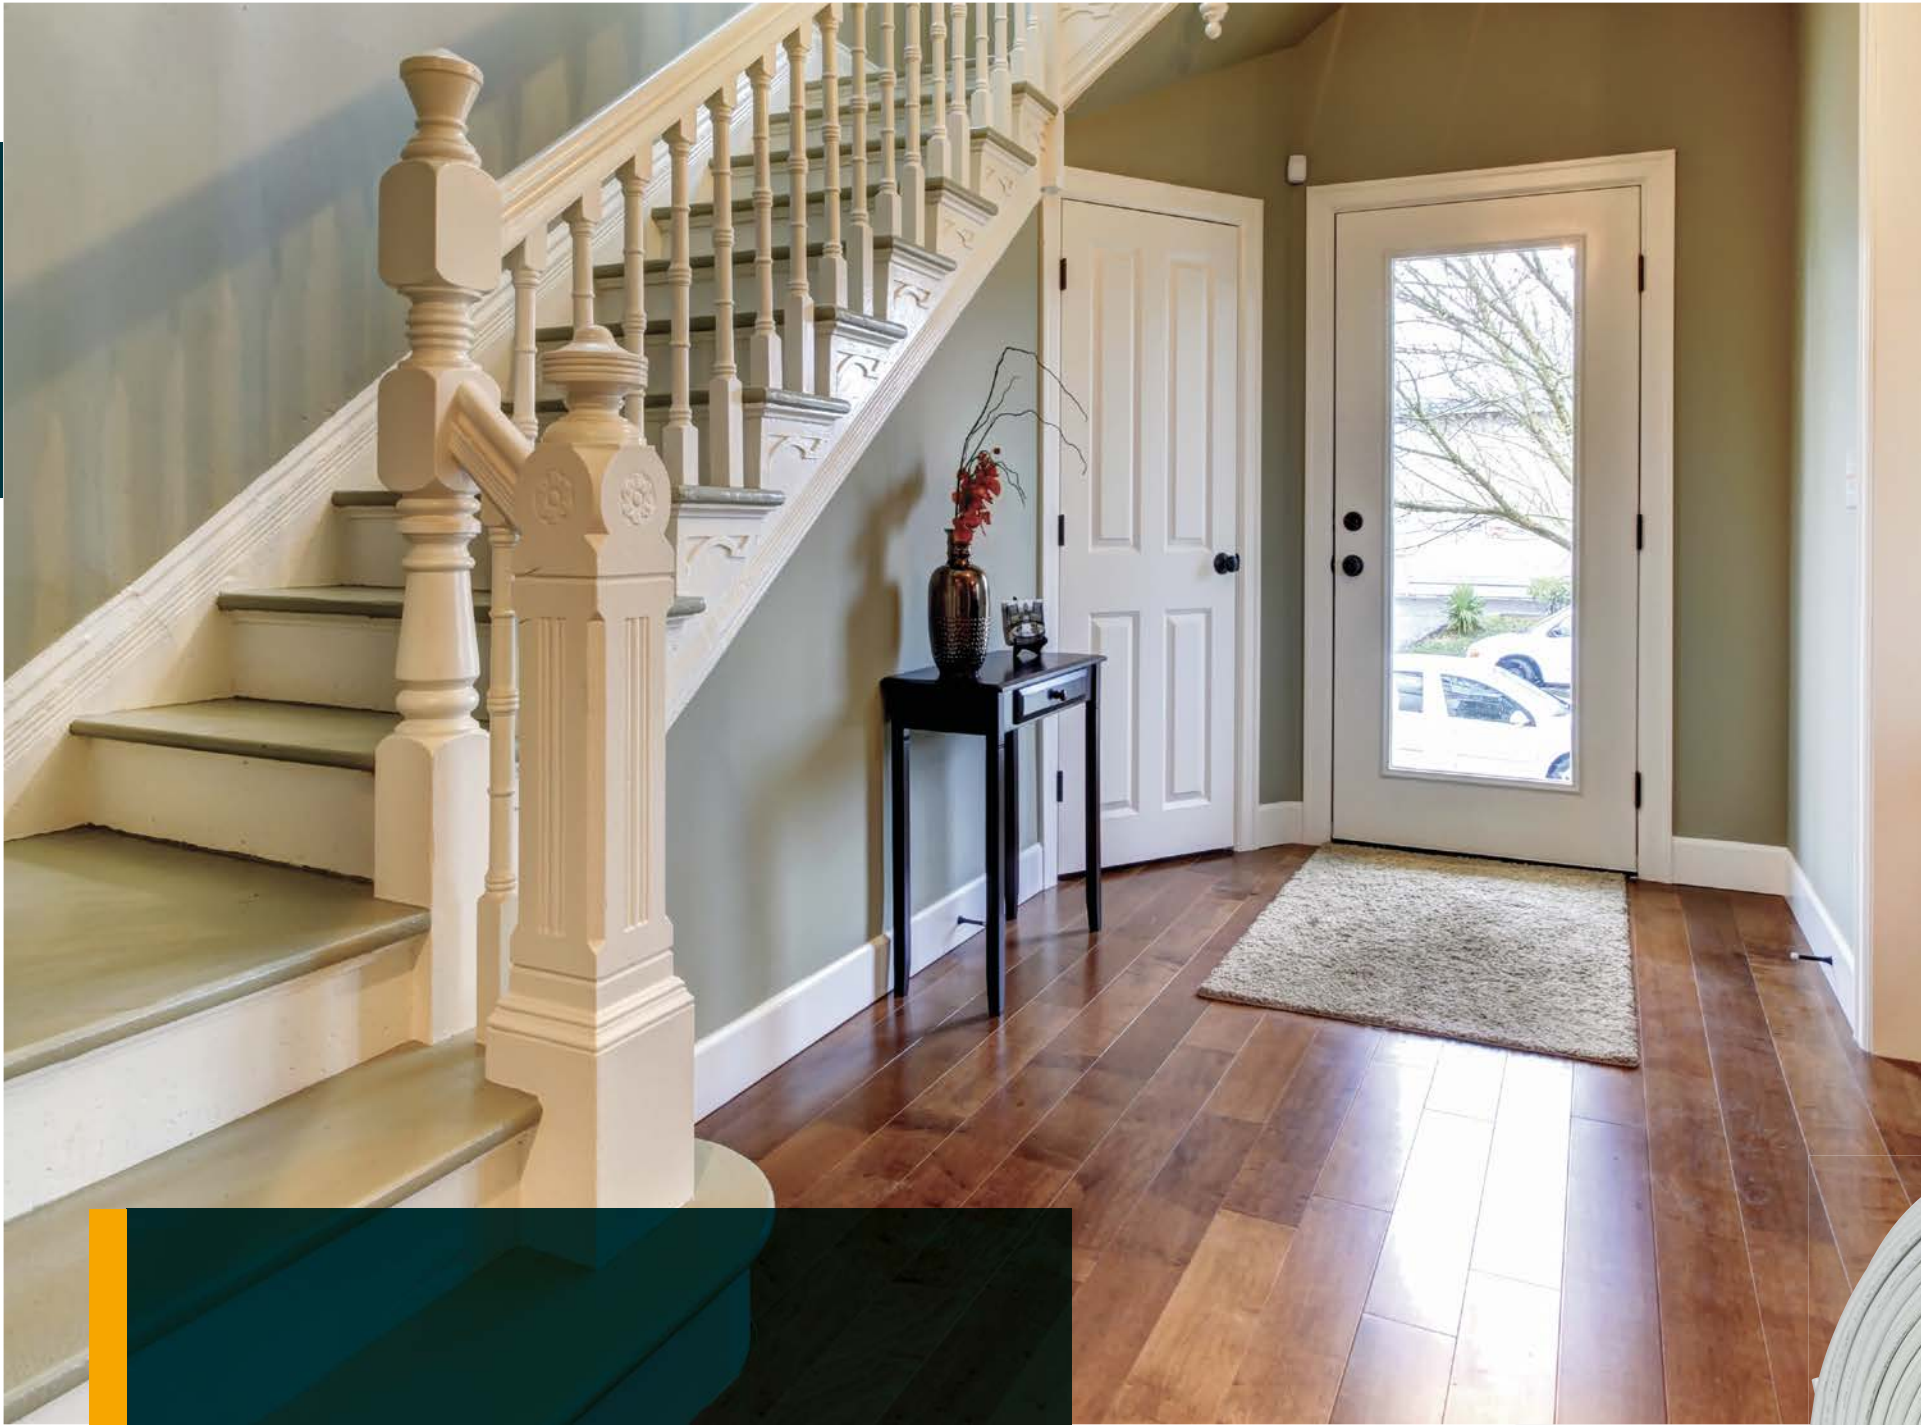

MYSON has been manufacturing FLOORTEC underfloor heating pipe since 1974. Our plant, based in Germany, combines all the advantages of precision German engineering with our own unrivalled expertise in the field of heating.

MYSON produce a full range of quality FLOORTEC pipework that is suitable for all of our fixing systems. Our pipe is environmentally friendly and quality guaranteed and conforms to all European quality standards, being tested to DIN4726 and BS7291-1:2001. It comes as part of our 10 year Complete System Guarantee, so you can be confident you are installing the best pipe available on the market.

We offer two types of pipe, 12, 17 and 20mm PEXcellent5 and 16mm multi-layer pipe.



PIPE



MULTI-LAYER PIPE




PEXCELLENT5

MYSON FLOORTEC PEXcellent5 underfloor heating pipe is a polyethylene pipe with five layers, which includes an integral oxygen barrier.




It is available in 12mm, 17mm and 20mm diameters and is compatible with most MYSON FLOORTEC heating systems, including MICROBOARD, our low-profile heating system. It is environmentally friendly and is produced with no chemical additives in either the production or disposal processes. It is quality guaranteed for 10 years and conforms to DIN4726 and BS7291-1:2001.

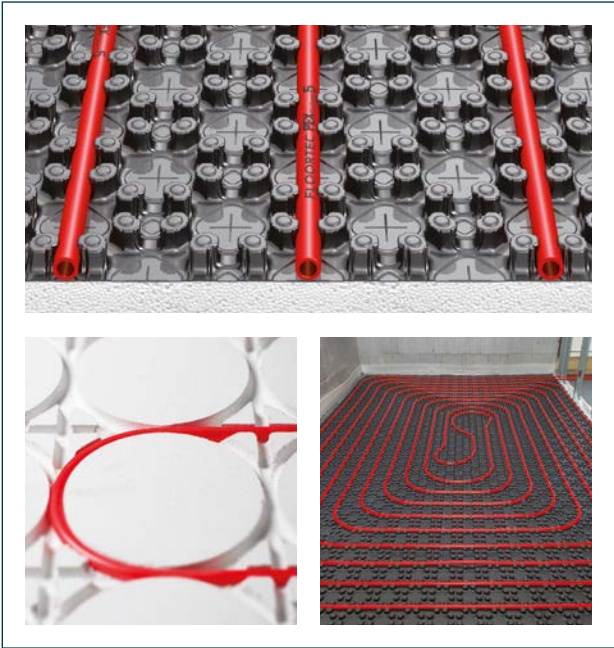


 **DELIVERY**
2 - 5 working days.

Description	Order Code
PEXcellent5 pipe 17 x 2mm (80m Coil)	54046
PEXcellent5 pipe 17 x 2mm (120m Coil)	54047
PEXcellent5 pipe 17 x 2mm (200m Coil)	54048
PEXcellent5 pipe 17 x 2mm (600m Coil)	54049
PEXcellent5 pipe 20mm (500m Coil)	54050
PEXcellent5 pipe 12mm (80m Coil)	54055
PEXcellent5 pipe 12mm (120m Coil)	54056
PEXcellent5 pipe 12mm (240m Coil)	54057




MULTI-LAYER

MYSON FLOORTEC's multi-layer pipe is available in 16mm diameter. It is a flexible pipe, making it extremely easy to install.




It is compatible with most MYSON FLOORTEC underfloor systems, the only exception being MICROBOARD, where specially manufactured 12mm pipe is required. It is quality guaranteed for 10 years and conforms to DIN4726 and BS7291-1:2001.

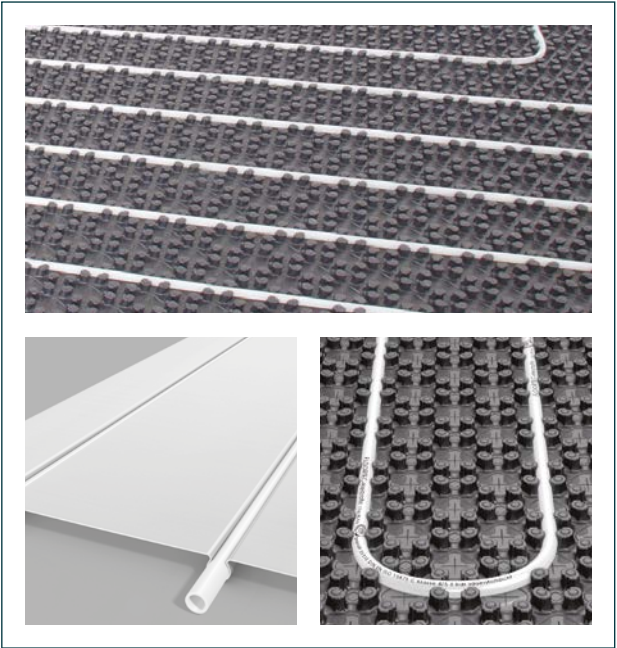


 **DELIVERY**
2 - 5 working days.

Description	Order Code
Multi-layer pipe 16 x 2mm (100m Coil)	53002
Multi-layer pipe 16 x 2mm (200m Coil)	53005
Multi-layer pipe 16 x 2mm (400m Coil)	53004

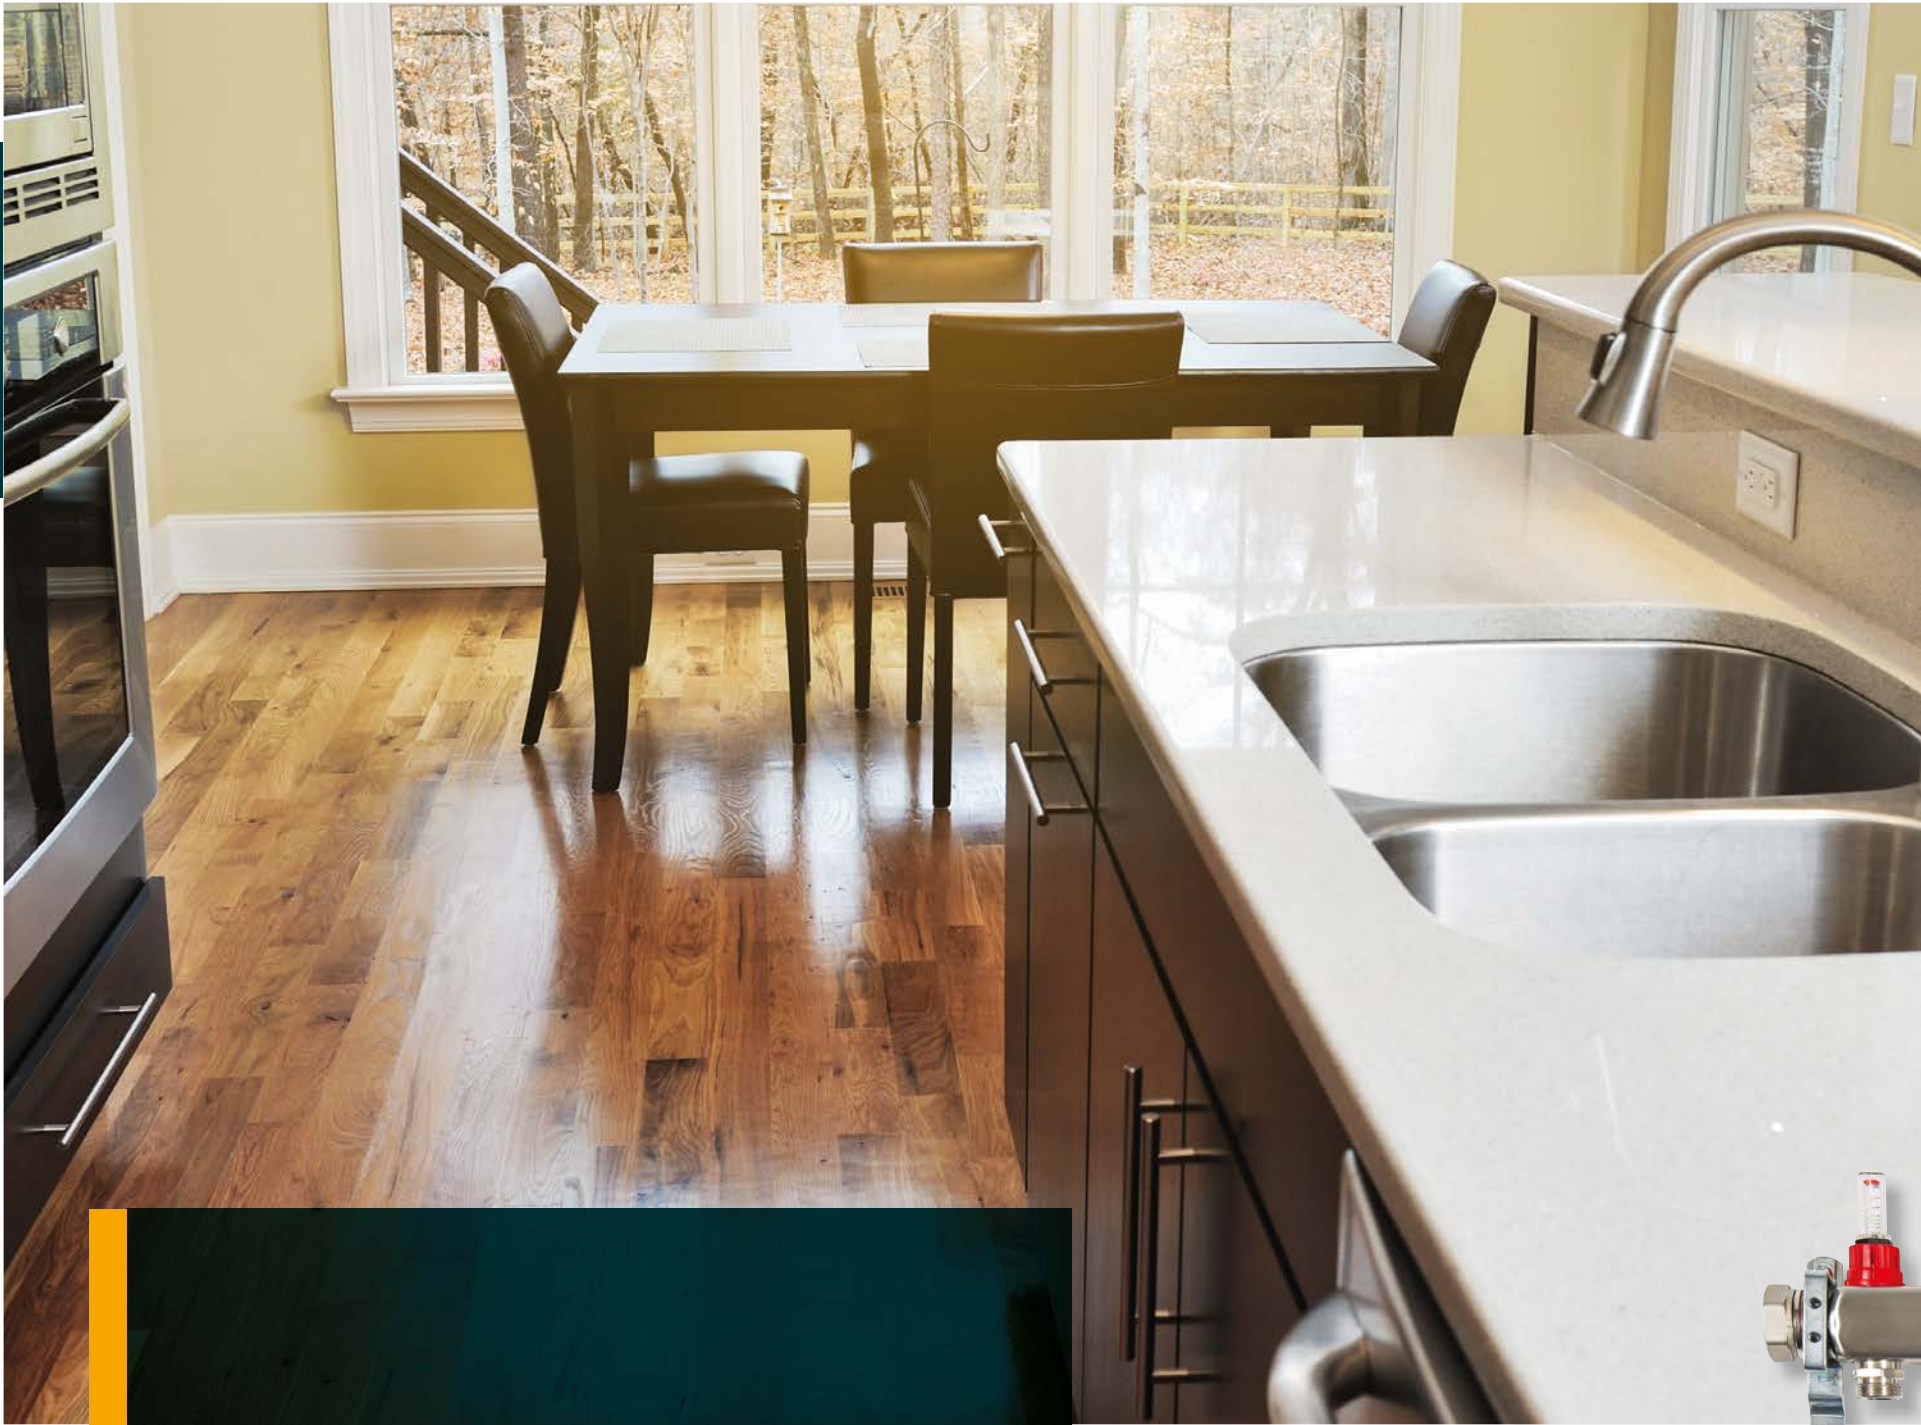

MYSON FLOORTEC underfloor heating offer a full range of quality controls to ensure that you get the most out of our underfloor heating systems. Our controls are designed by our heating experts to meet the requirements of our customers and will perfectly complement our systems.

Controls are an essential part of every underfloor heating system. Each system requires at least one manifold, control centre, wiring centre and thermostat. MYSON FLOORTEC supply quality manifolds, isolating and blending valves and an A-rated pump. MYSON FLOORTEC also supplies wiring centres as well as a range of thermostats from basic digital thermostats to WiFi enabled touch controls.

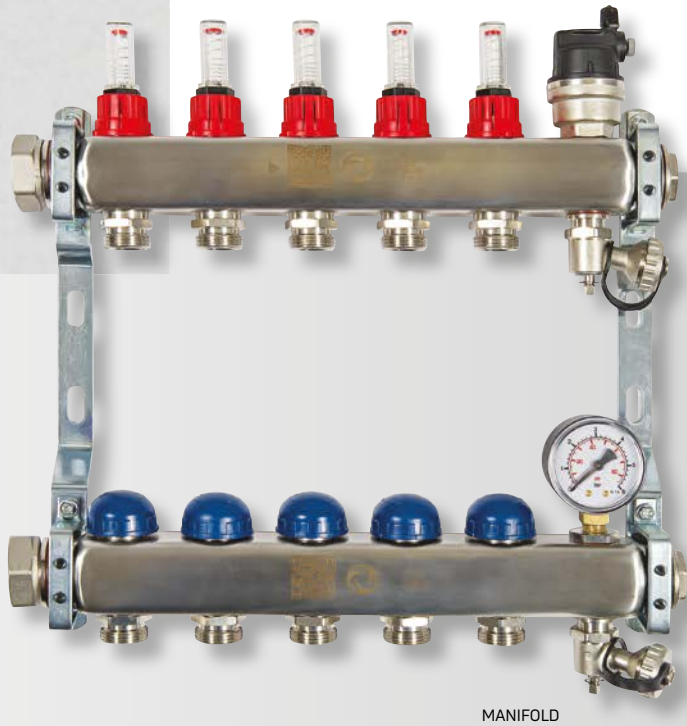

UNISENZA WiFi

MANIFOLD

CONTROLS



PREMIUM MANIFOLDS


The MYSON FLOORTEC underfloor heating manifold is the central point to most underfloor heating systems. The manifold is responsible for distributing mixed water provided by the manifold control centre to each heating circuit.



MYSON have introduced their premium manifold as part of the complete bespoke system that is more compact, easier to use, and comes complete with all fittings and fixtures.

It is neat and compact in size and has a number of features and benefits that make it one of the leading manifolds on the market.

An instructional video for flow meters can be viewed on our **YouTube channel**

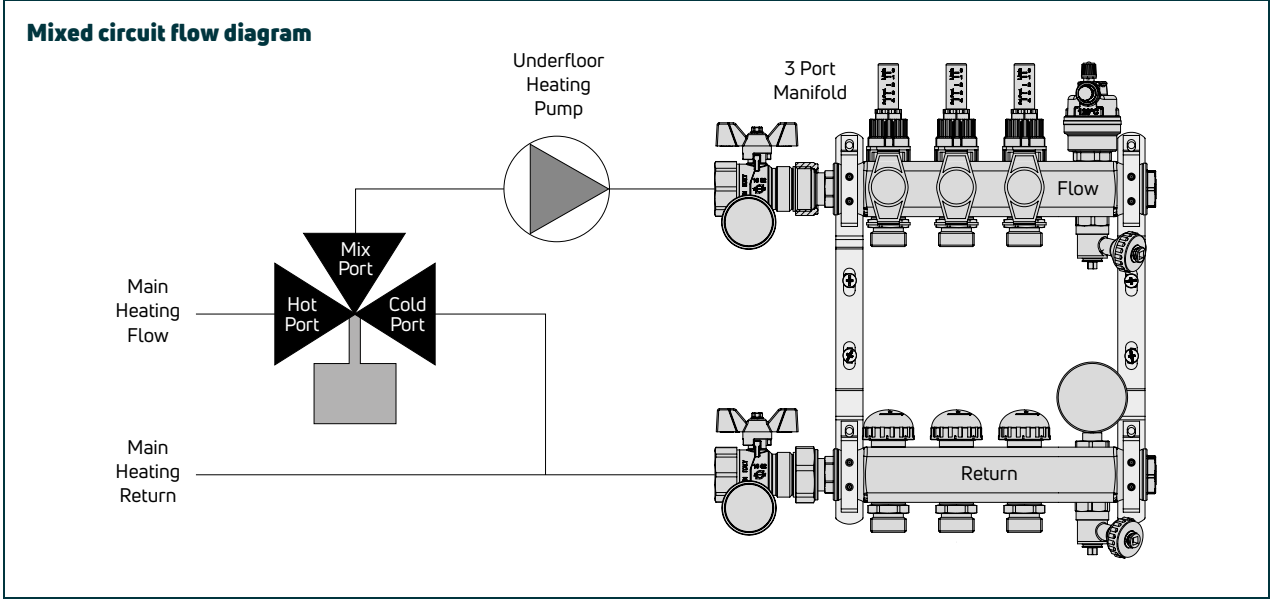

DELIVERY
2 - 5 working days.

Premium manifolds

Description	Order Code
2 port Premium Manifold	99302PR
3 port Premium Manifold	99303PR
4 port Premium Manifold	99304PR
5 port Premium Manifold	99305PR
6 port Premium Manifold	99306PR
7 port Premium Manifold	99307PR
8 port Premium Manifold	99308PR
9 port Premium Manifold	99309PR
10 port Premium Manifold	99310PR
11 port Premium Manifold	99311PR
12 port Premium Manifold	99312PR
Pipe Bend Support 14-17mm	50070
Pipe Bend Support 18-23mm	50071
¾" Blanking Cap	53084

Adaptors

Manifold Coupling for 17 x 2mm Pex	50114
Straight Coupling for 17 x 2mm Pex	50010
Straight Coupling for 14 x 2mm Pex	50020
Manifold Coupling for 20 x 2mm Pex	50113
Straight Coupling for 20 x 2mm Pex	50011
Manifold Coupling for 16 x 2mm Multi-layer	53033
Straight Coupling for 16 x 2mm Multi-layer	53032
15mm Copper Adaptor	40213
14mm x ½" Male Iron Adaptor	50115
17mm x ½" Male Iron Adaptor	50116
Coupling Central Core	50009
Manifold Coupling for 12 x 2mm Pex	50118
Straight Coupling for 12mm x ½" Male Iron Adaptor	50013
1" Straight Swivel Adaptor	99329PR

Premium manifold & pump pack - manifold dimension details 2-12 port

Number of Ports	Manifold Length(M) (±1mm)	Total Length(L) (±1mm)
2	204	454
3	254	504
4	304	554
5	354	604
6	404	654
7	454	704
8	504	754
9	554	804
10	604	854
11	654	904
12	704	954

Pump pack and manifold sold separately.



PREMIUM PUMP PACK


The next generation pump pack from MYSON FLOORTEC works alongside the premium manifold to control the underfloor heating system, allowing it to work at a lower flow temperature.




50825PR

The pump pack is compatible with all MYSON manifolds, including the leading premium manifolds and is easily installed.

The fully assembled premium pump pack has all the advantages of before, including a high efficiency circulating pump which now comes assembled with a thermostatic mixing valve complete with integral non-return valve and flow regulating valve ideal for balancing large systems.

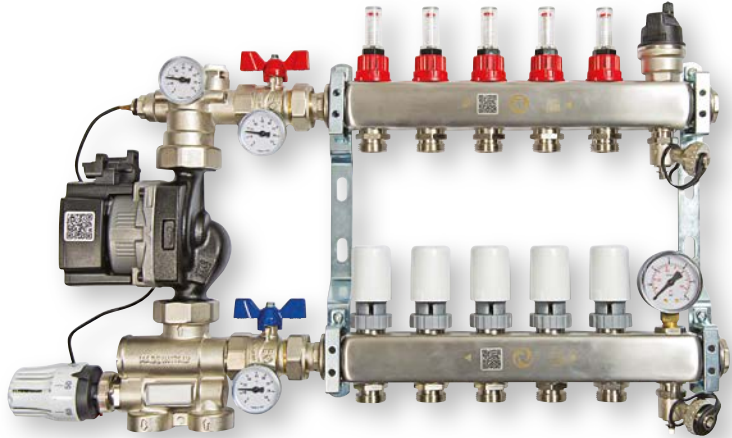

99305PR

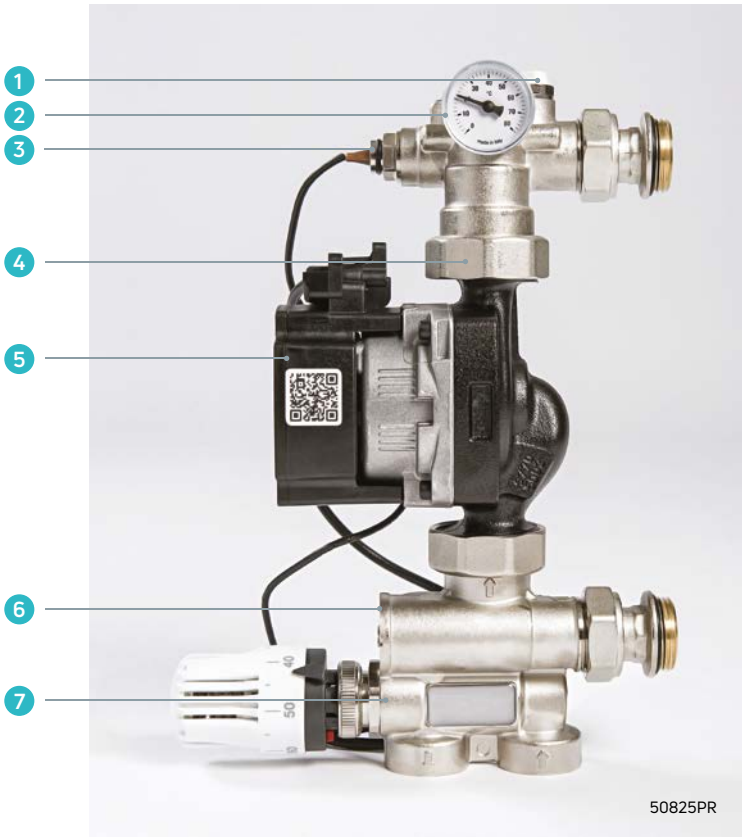

50825PR

- 1 Manual air vent
- 2 0-80°C Temperature gauge
- 3 Remote sensing probe
- 4 Non-return valve
- 5 Grundfos UPM3 high efficiency circulating pump
- 6 Flow increase valve
- 7 Thermostatically controlled mixing valve

 **DELIVERY**
2 - 5 working days.

Description	Order Code
'A' Rated Pump Pack	50825PR
'A' Rated Single Zone Control Unit	50810A
Y-Splitters (Pair)	53036VN
22mm Mixing Valve	52014



WIRING CENTRES & THERMOSTATS

Wiring centres

MYSON FLOORTEC wiring centres come in two different types. A low voltage version for a 24V power supply and a 230V version for a 230V power supply. The wiring centre controls the thermostats and actuators.



Wiring centres & accessories

Description	Order Code
230V Actuator Head	50442
24V Actuator Head	50443
230V Wiring Centre - 10-Way	50437
24V Wiring Centre	50599
230V Wiring Centre - 4-Way	50597
240V Wiring Centre - 5-Way	50436

Dial Thermostats

The MYSON DIAL thermostat is simple to use, wall mounted and allows for the control of underfloor heating and cooling with a single device. Modern and discrete design with a white matt finish. Available in 24V or 230V.



50430/50431

WiFi Thermostats

MYSON programmable WiFi thermostats will always allow you to control your heating from anywhere in the world. Easy to set up and configure on your smart phone or tablet via the MYSON Apps. 50520 suitable with 230V wiring centre only.



50434/50435



50520

Digital Thermostats

The MYSON DIGITAL room thermostat can be simply set for ideal temperature control using the intuitive user display. External sensor can be used for remote air, floor or limit functions.



50432/50433

RF Thermostat

The MYSON MPRT is an easy to use programmable radio frequency room thermostat. It utilises Smart Start technology which could save up to 10% on heating bills. Suitable with a 24V or 230V wiring centre.



50511

Programmable Thermostats

The MYSON TOUCH range of programmable thermostats allow you to set different room temperatures for the morning, day, evening and night time. The range includes the MYSON TOUCH and MYSON TOUCH RS with remote sensor, primarily designed for underfloor systems. Suitable with a 230V wiring centre.



50516

Programmer

The MYSON MEP1c is a single channel time switch for use with combi boilers, or as a domestic hot water control when using a programmable thermostat for the central heating circuit.



50808



DELIVERY
2 - 5 working days.

Thermostats & programmers

Description	Order Code
Unisenza Dial Thermostat - 230V	50430
Unisenza Dial Thermostat - 24V	50431
Unisenza Digital Thermostat - 230V	50432
Unisenza Digital Thermostat - 24V	50433
Touch Screen Thermostat - 230V	50516
TOUCH c/w Remote Sensor	50517
TOUCH2 WiFi Thermostat	50520
TOUCH2 WiFi Thermostat and Hub	50521
230V Unisenza WiFi Thermostat	50434
24V Unisenza WiFi Thermostat	50435
MPRT RF Programmable Thermostat	50511
MEP1c Single Channel Programmer	50808



SINGLE ROOM PACKS

MYSON FLOORTEC offer a wide range of underfloor heating single room packs. These systems complement MYSON FLOORTEC's bespoke underfloor range. The single room packs are easy to install using a variety of our fixing methods. There are no design requirements and the packs are competitively priced. The single room packs are for water-based heating and are available in a range of sizes to suit various room layouts. Area packs are supplied with 17/2mm pipework, although other pipework is available on request. Punch Packs are supplied with 16mm multi-layer pipe.

The single room packs contain everything you need for underfloor heating in one handy box and are available in pack sizes from 12m² to 40m². They also include a touch screen thermostat.






AREA PACKS

MYSON FLOORTEC offer a range of single room packs for screeded and joisted floor types. They are available for a range of fixing systems and are ideal for smaller areas, extensions and refurbishments.



The packs are supplied with everything you need, including 17/2mm PEXcellent5 pipe and a touch screen thermostat.

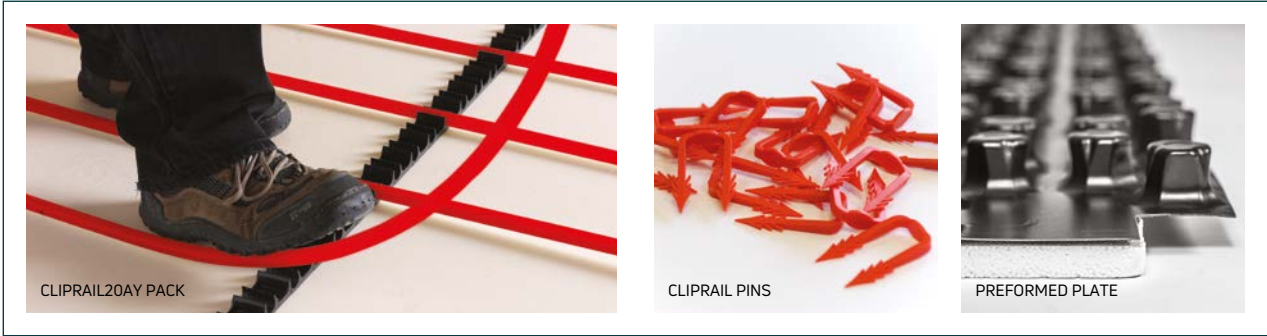

 **DELIVERY**
2 - 5 working days.

Description	Order Code
Underfloor Heating Pack - Cliprail 12m ²	CLIPRAIL12AY
Underfloor Heating Pack - Cliprail 15m ²	CLIPRAIL15AY
Underfloor Heating Pack - Cliprail 20m ²	CLIPRAIL20AY
Underfloor Heating Pack - Cliprail 30m ²	CLIPRAIL30AY
Underfloor Heating Pack - Cliprail 40m ²	CLIPRAIL40AY
Underfloor Heating Pack - Preformed Plate 12m ²	PFP12AY
Underfloor Heating Pack - Preformed Plate 15m ²	PFP15AY
Underfloor Heating Pack - Preformed Plate 20m ²	PFP20AY
Underfloor Heating Pack - Preformed Plate 25m ²	PFP25AY
Underfloor Heating Pack - Preformed Plate 30m ²	PFP30AY
Underfloor Heating Pack - Preformed Plate 40m ²	PFP40AY
Underfloor Heating Pack - Naked Preformed Plate 12m ²	NAKEDPFP12AY
Underfloor Heating Pack - Naked Preformed Plate 15m ²	NAKEDPFP15AY
Underfloor Heating Pack - Naked Preformed Plate 20m ²	NAKEDPFP20AY
Underfloor Heating Pack - Naked Preformed Plate 25m ²	NAKEDPFP25AY
Underfloor Heating Pack - Naked Preformed Plate 30m ²	NAKEDPFP30AY
Underfloor Heating Pack - Naked Preformed Plate 40m ²	NAKEDPFP40AY
Underfloor Heating Pack - Plated 12m ²	PLATED12AY
Underfloor Heating Pack - Plated 15m ²	PLATED15AY
Underfloor Heating Pack - Plated 20m ²	PLATED20AY
Underfloor Heating Pack - Plated 30m ²	PLATED30AY
Underfloor Heating Pack - Plated 40m ²	PLATED40AY



PUNCH PACKS

MYSON FLOORTEC's Punch Packs for single rooms are designed for a screeded floor. They include specially selected items to provide unbeatable quality and value and come with MYSON's innovative Tackernails, so are easy to install, and everything you need is in one handy box.



They also come with 16mm multi-layer pipe, our A-rated single zone control unit and a MYSON thermostat complete with floor sensor. They are available in 20m² and 40m² pack (based on 200mm spacings). They're a cost effective solution for underfloor heating and backed by MYSON FLOORTEC's technical support and product guarantees.



 **DELIVERY**
2 - 5 working days.

Description	Order Code
Punch Pack 20	PUNCHPACK20
Punch Pack 40	PUNCHPACK40



Electric heating

Electric heating has grown in popularity rapidly in recent years, offering benefits that cannot be provided by conventional heating.

MYSON has a full range of electric products, including practical panel radiators, stylish contemporary and design radiators, a number of attractive and practical towel warmers as well as underfloor heating. Our range is designed to be functional and stylish, offering heating alternatives to areas where there is no gas supply or heating pipes available. Electric heating is perfect for renovation projects, such as bathroom and kitchen refurbishments, extensions and conservatories, as it is easy to install and requires no plumbing.

We also offer practical space saving plinth heaters, see KICKSPACE® on page 142.

Our electric products are manufactured to the same high standards as the rest of the MYSON range and come with a two year warranty from date of purchase.




FINESSE

The FINESSE electric radiator provides all the benefits of central heating without the need for a plumbed in system, so it is perfect for projects that are off-gas or have no central heating pipes in the required space. It comes with a sleek, modern control panel and a precision electronic thermostat with frost protection, providing maximum control and minimum energy consumption. It is manufactured in the UK and has a class 1 electrical protection rating.



Mounting positions, dimensions & wall brackets

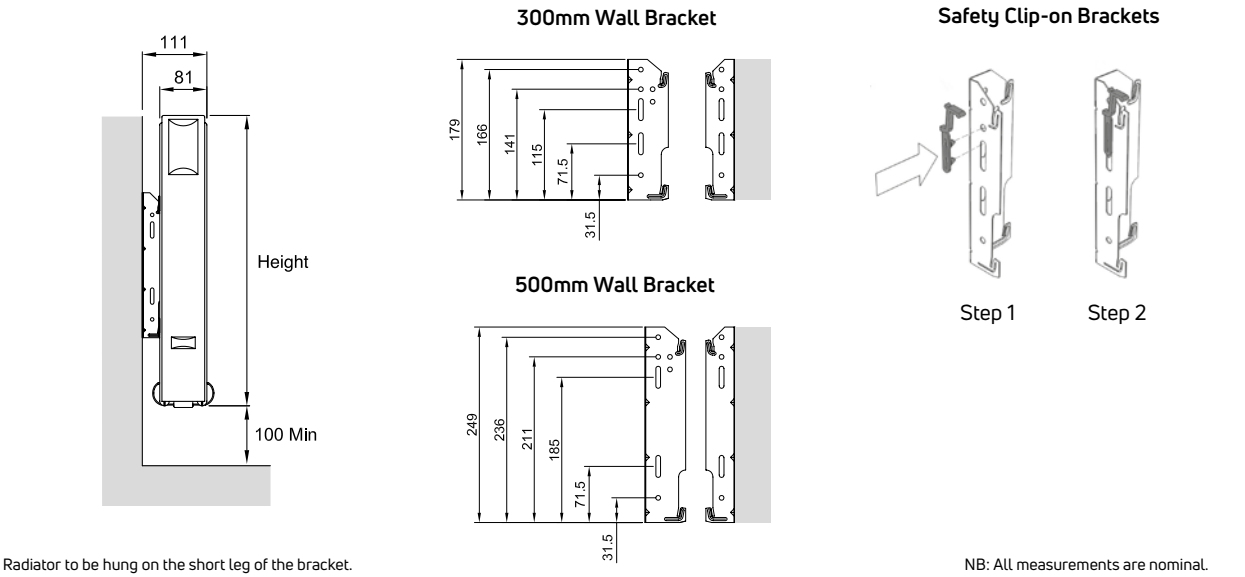

General specification

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018. Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU.
- ACCESSORIES**
TOUCH4 - 4 zone touch screen programmer. Please see page 250.
- SEALED ELECTRIC**
- IP RATED**
IP44.
- DELIVERY**
2 - 5 working days.
- WASTE DISPOSAL**
According to The WEEE Directive (2012/19/EU). Please see page 257.
- ECO DESIGN DIRECTIVE**
Conforms to the standards (EU) 2015/1188.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016).
- MATERIAL**
Manufactured from steel and filled with environmentally friendly vegetable oil.

For more general information, please see page 256.

Technical characteristics

Measured temperature precision	0.1°C
Operating temperature	-10°C to +50°C
Setting temperature range	+5°C to +30°C
Control characteristics	PWM
Electrical protection	Class 1 – IP44
Power supply	230 VAC – 50 Hz

For more information, please refer to the installation instructions available on our website.

Accessories

Product	Order Code
TOUCH4* - 4 Zone, Touch Screen Programmer (hard wired)	TOUCH4 - refer to page 250
90° Adaptor - For side arrangement of the RIO control, suitable for RIO COMPACT PLUS, RIO PLAN PLUS and RIO LINEA PLUS (also can be used with MYSON FINESSE control).	RIOPLUS90ADAP

*Please refer to our website for wiring diagram.



TOUCH4* RIOPLUS90ADAP

Technical information & heat outputs

Order Code	Nominal Height (mm)	Nominal Length (mm)	Weight (packed - kg)	Rated Watts
FE30DX50	300	500	10.5	500
FE30DX80	300	800	16.5	750
FE30DX100	300	1000	20.5	1000
FE30DX130	300	1300	25.5	1250
FE30DX160	300	1600	31.5	1500
FE30DX200	300	2000	38.5	2000
FE50DX40	500	400	14.0	500
FE50DX50	500	500	17.0	750
FE50DX65	500	650	21.5	1000
FE50DX80	500	800	25.5	1250
FE50DX95	500	950	29.5	1500
FE50DX125	500	1250	39.1	2000



RIO PLUS

The RIO PLUS Range is a modern electric panel radiator with unique and energy saving features built in to the electronics. It is available in three models RIO COMPACT PLUS, RIO PLAN PLUS and RIO LINEA PLUS, all models offer superb temperature controllability via a clear visual digital display discreetly housed on the side panel. All models are fully programmable, with several operating modes including; open window function, frost protection and an adjustable surface temperature which creates a comfortable, radiant warmth. RIO PLUS radiators can now be controlled via an app as well as via voice control linked to any of the well-known home automation systems on the market.



RIO COMPACT PLUS



RIO COMPACT PLUS



RIO PLAN PLUS

RIO LINEA PLUS

RIO PLAN PLUS

The sleek flat front panel design of the RIO PLAN PLUS offers a contemporary alternative to the traditional RIO COMPACT PLUS radiator.

RIO LINEA PLUS

The RIO LINEA PLUS model takes this modern styling one step further with a decorative, rather than flat, front panel.

RIO PLUS RANGE

General specification & technical information

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - ISO 45001:2018. Carries the CE and UKCA mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016).
- MATERIAL**
Manufactured from steel and filled with environmentally friendly vegetable oil.
- ACCESSORIES**
TOUCH4 - 4 zone touch screen programmer. Please see page 250.
Zigbee 3.0 High End Gateway - for programming with Smartphone App.

- SEALED ELECTRIC**
- IP RATING**
IP44.
- DELIVERY**
RIO COMPACT PLUS:
Stocked item: 2 - 5 working days.
RIO PLAN PLUS/RIO LINEA PLUS:
Non-stocked item: 3 - 4 weeks.
- WASTE DISPOSAL**
According to The WEEE Directive (2012/19/EU). Please see page 257.
- ECO DESIGN DIRECTIVE**
Conforms to the standards (EU) 2015/1188.

For more general information, please see page 256.



RIO PLAN PLUS



RIO LINEA PLUS

Technical characteristics

Measured temperature precision	0.1°C
Operating temperature	-30°C to +50°C
Setting temperature range	+0.5°C to +30°C
Electrical protection	Class 1 – IP44
Power supply	230 VAC – 50 Hz

For more technical information, please refer to the installation instructions available on our website.

Accessories

Product	Order Code
TOUCH4* - 4 Zone, Touch Screen Programmer (hard wired)	TOUCH4 - refer to page 250
Zigbee 3.0 High End Gateway - Manage your installation remotely with a mobile application: - Adjust the temperature of each room - Create and manage one or more comfort zones - Digital display of energy consumption	UNIPLGATEWAY
90° Adaptor - For side arrangement of the RIO control, suitable for RIO COMPACT PLUS, RIO PLAN PLUS and RIO LINEA PLUS (also can be used with MYSON FINESSE control).	RIOPLUS90ADAP

*Please refer to our website for wiring diagram.



TOUCH4*




UNIPLGATEWAY



RIOPLUS90ADAP


Mounting positions, dimensions & wall brackets

*+3mm for PLAN PLUS and LINEA PLUS models

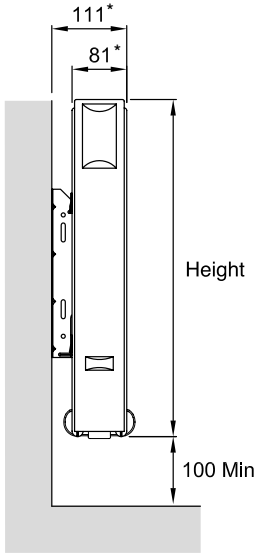


Radiator to be hung on the short leg of the bracket.


300mm Wall Bracket

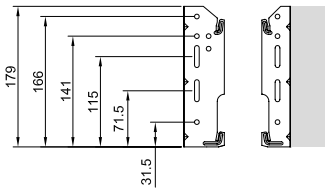

500mm Wall Bracket



Safety Clip-on Brackets

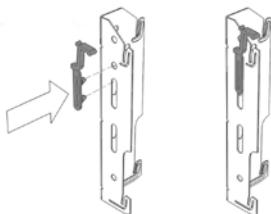

Step 1

Step 2

NB: ALL measurements are nominal.

Technical information & heat outputs

RIO COMPACT PLUS

Order Code	Nominal Height (mm)	Nominal Length (mm)	Weight (packed - kg)	Rated Watts
RIOC30DX50Z	300	500	12.0	500
RIOC30DX80Z	300	800	16.9	750
RIOC30DX100Z	300	1000	20.5	1000
RIOC30DX130Z	300	1300	26.5	1250
RIOC30DX160Z	300	1600	31.5	1500
RIOC30DX200Z	300	2000	38.5	2000
RIOC50DX40Z	500	400	14.6	500
RIOC50DX50Z	500	500	17.0	750
RIOC50DX65Z	500	650	21.5	1000
RIOC50DX80Z	500	800	24.6	1250
RIOC50DX95Z	500	950	31.0	1500
RIOC50DX125Z	500	1250	38.6	2000

RIO PLAN PLUS

RIOP30DX50Z*	300	500	13.3	500
RIOP30DX80Z*	300	800	18.9	750
RIOP30DX100Z*	300	1000	23.0	1000
RIOP30DX130Z*	300	1300	29.8	1250
RIOP30DX160Z*	300	1600	35.6	1500
RIOP30DX200Z*	300	2000	43.6	2000
RIOP50DX40Z*	500	400	16.3	500
RIOP50DX50Z*	500	500	19.1	750
RIOP50DX65Z*	500	650	24.2	1000
RIOP50DX80Z*	500	800	27.9	1250
RIOP50DX95Z*	500	950	35.0	1500
RIOP50DX125Z*	500	1250	43.8	2000

*Non-stocked item.

RIO LINEA PLUS

RIOL30DX50Z*	300	500	13.3	500
RIOL30DX80Z*	300	800	18.9	750
RIOL30DX100Z*	300	1000	23.0	1000
RIOL30DX130Z*	300	1300	29.8	1250
RIOL30DX160Z*	300	1600	35.6	1500
RIOL30DX200Z*	300	2000	43.6	2000
RIOL50DX40Z*	500	400	16.3	500
RIOL50DX50Z*	500	500	19.1	750
RIOL50DX65Z*	500	650	24.2	1000
RIOL50DX80Z*	500	800	27.9	1250
RIOL50DX95Z*	500	950	35.0	1500
RIOL50DX125Z*	500	1250	43.8	2000

*Non-stocked item.



HYDRONIC MODEL
AVAILABLE

Please see page 86


ELECTRIC
DÉCOR

The electric DÉCOR is a stylish, contemporary alternative to a traditional radiator. An electric version of our popular hydronic model, the distinctive flat tube design will enhance the look of any room. It is suitable for a wide range of uses, both domestic and commercial. It is also perfect for projects that are off-gas or have no central heating pipes installed.

ELECTRIC DÉCOR
HORIZONTAL

ELECTRIC DÉCOR
VERTICAL

Dimensions

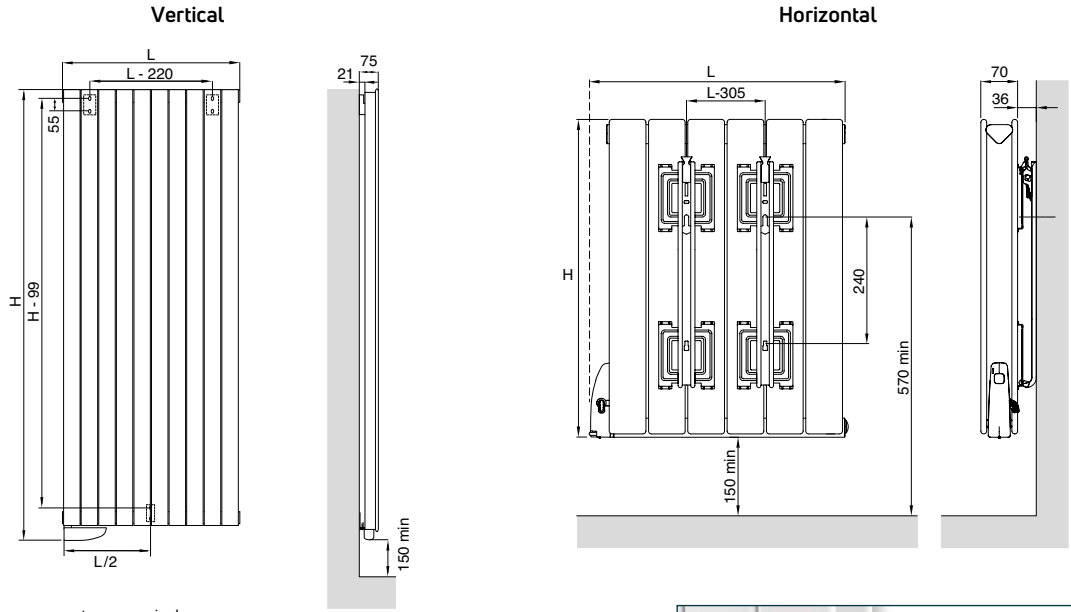

NB: All measurements are nominal.

General specification

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001. Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU.
- ACCESSORIES**
TOUCH4 - 4 zone touch screen programmer. Please see page 250.
- SEALED ELECTRIC**
- IP RATING**
IP44.
- DELIVERY**
2 - 5 working days.
- WASTE DISPOSAL**
According to The WEEE Directive (2012/19/EU). Please see page 257.
- ECO DESIGN DIRECTIVE**
Conforms to the standards (EU) 2015/1188.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016).
- MATERIAL**
Manufactured from 1.25mm steel. Horizontal filled with a glycol mix, part water/ part anti-freeze. Vertical filled with mineral oil.

For more general information, please see page 256.



Accessories

Product	Order Code
Remote Control Thermostat (supplied)	ELECTHERMO5 (for replacements)
TOUCH4* - 4 Zone, Touch Screen Programmer (hard wired)	TOUCH4 - refer to page 250

*Please refer to our website for wiring diagram.



Technical information & heat outputs

ELECTRIC DÉCOR vertical

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Weight (kg)	Rated Watts
E6V10180	1835	455	30.36	1000
E9V10180	1835	680	41.86	1500

ELECTRIC DÉCOR horizontal

E6V20060	600	485	17.94	500
E8V20060	600	635	23.00	750
E11V20060	600	860	30.82	1000
E13V20060	600	1010	36.80	1250




ELECTRIC COLUMN

The classic good looks of the electric COLUMN will add an elegant style to any project. An electric version of the popular hydronic model, the COLUMN is suitable for both domestic and commercial projects. The electric COLUMN is the world's first full laser radiator, meaning there are no joints. It is also perfect for projects that are off-gas or have no central heating pipes installed.

ELECTRIC COLUMN
HORIZONTAL

ELECTRIC COLUMN
VERTICAL

Dimensions

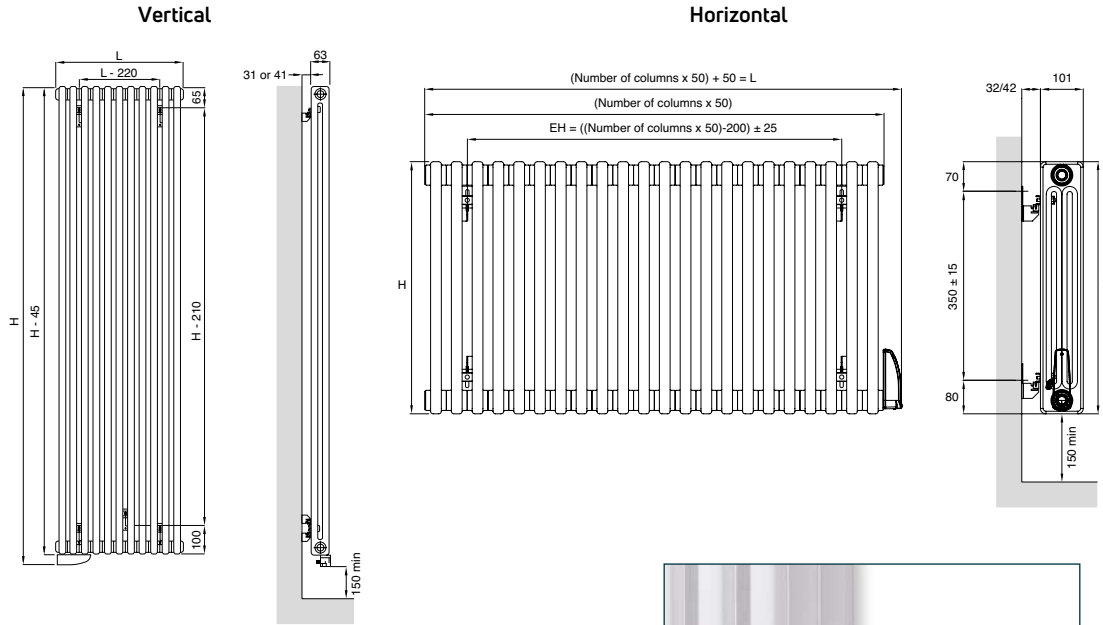


General specification

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001. Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU.
- ACCESSORIES**
TOUCH4 - 4 zone touch screen programmer. Please see page 250.
- SEALED ELECTRIC**
- IP RATING**
IP44.
- DELIVERY**
2 - 5 working days.
- WASTE DISPOSAL**
According to The WEEE Directive (2012/19/EU). Please see page 257.
- ECO DESIGN DIRECTIVE**
Conforms to the standards (EU) 2015/1188.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016).
- MATERIAL**
Manufactured from 1.25mm steel. Filled with a glycol mix, part water/ part anti-freeze.
- For more general information, please see page 256.



Accessories

Product	Order Code
Towel Rail (white with chrome fixings)	12SECRAIL ▲
Micro Fibre Cleaning Brush	COLUMNBRUSH2
Remote Contol Thermostat (supplied)	ELECTHERMO5 (for replacements)
TOUCH4* - 4 Zone, Touch Screen Programmer (hard wired)	TOUCH4 - refer to page 250

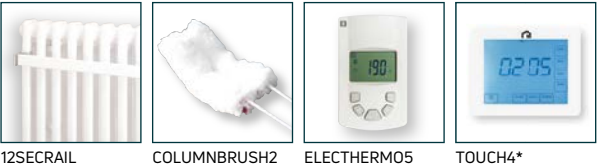

*Please refer to our website for wiring diagram.
▲ Towel rail only available for products with this symbol.

Technical information & heat outputs

ELECTRIC COLUMN vertical

Order Code	Nominal Height (H) (mm)	Nominal Length (L) (mm)	Weight (kg)	Rated Watts
E8SEC2180	1845	400	34.87	1000
E12SEC2180▲	1845	600	51.89	1500

ELECTRIC COLUMN horizontal

E8SEC3060	600	450	20.42	500
E10SEC3060	600	550	24.01	750
E12SEC3060▲	600	650	28.80	1000
E14SEC3060	600	750	33.86	1250




ELECTRIC AVONMORE

The electric model of our most popular towel warmer, AVONMORE, combines all the benefits of the hydronic range, with the advantages of electric heating. It is a classic multi-rail design that is available in a range of sizes, finishes and straight or curved models. This makes it an extremely popular specification product for new build. It has three rail configurations and tube spacing for practical towel placement and is a flexible choice for any project.

ELECTRIC AVONMORE STRAIGHT

Dimensions

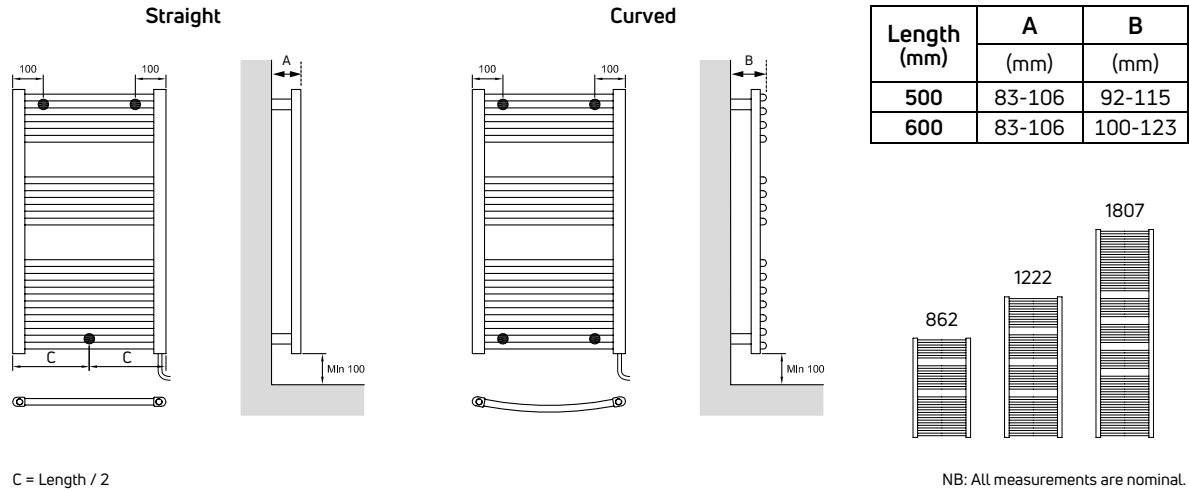

General specification

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001. Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU.
- ACCESSORIES**
Please see page 138.
- SEALED ELECTRIC**
- IP RATING**
IP67.
- DELIVERY**
Stocked items:
2 - 5 working days.
Non-stocked items:
8 - 12 weeks. Please refer to the full price list for more information.
- WASTE DISPOSAL**
According to The WEEE Directive (2012/19/EU). Please see page 257.
- ECO DESIGN DIRECTIVE**
Out of Scope. Towel warmers exempt from Directive.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in white (RAL 9016) or chrome.
- MATERIAL**
Manufactured from steel. Filled with a glycol mix, part water/part anti-freeze.



ELECTRIC AVONMORE CURVED

For more general information, please see page 256.

Technical information & heat outputs

ELECTRIC AVONMORE straight

Order Code	Nominal Height (mm)	Nominal Length (mm)	Weight (kg)	Rated Watts
EECOS85	862	500	13.00	450
EECOS125	1222	500	17.80	450
EECOS126	1222	600	18.70	450
EECOS185	1807	500	24.20	450

ELECTRIC AVONMORE curved

EECOC85	862	500	13.00	450
EECOC125	1222	500	17.80	450
EECOC126	1222	600	18.70	450
EECOC185	1807	500	24.20	450



TAMAR

TAMAR electric towel warmers are innovative and practical designs that bring all the benefits of electrical heating into your bathroom. These towel warmers are easy to install, virtually maintenance free, and do not require any plumbing.

TAMAR E070 is an innovative, curved design that rotates 180° to give extra flexibility.

TAMAR E080 is a an attractive curvy, serpentine design.


TAMAR E090 is a neat and compact design ideal for smaller spaces.

TAMAR E0130 is similar in design to the E090 but a taller alternative.



TAMAR E070

Projections

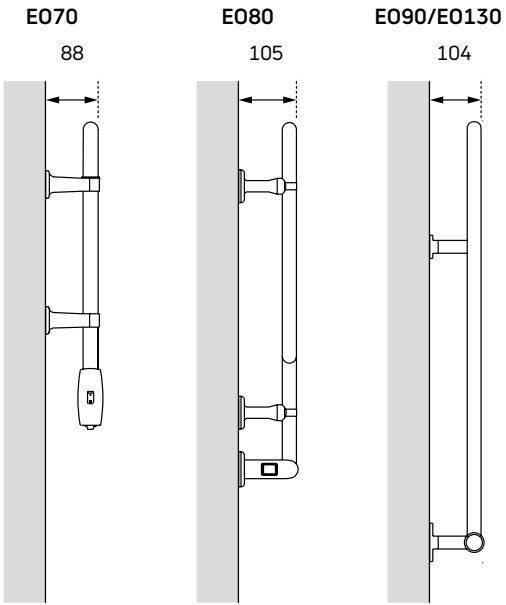

NB: All measurements are nominal.

General specification

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001. Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU.
- ACCESSORIES**
Please see page 138.
- SEALED ELECTRIC**
- IP RATING**
E070 & E080: IP44
E090 & E0130: IP64
- DELIVERY**
Non-stocked item: 8 -12 weeks.
- APM® TECHNOLOGY**
E090 & E0130 are fitted with the latest APM® element technology. Please see page 257.
- WASTE DISPOSAL**
According to The WEEE Directive (2012/19/EU). Please see page 257.
- ECO DESIGN DIRECTIVE**
Out of Scope. Towel warmers exempt from Directive.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in chrome.
- MATERIAL**
Manufactured from steel. Filled with a glycol mix, part water/part anti-freeze. E080 contains a dry element only.


For more general information, please see page 256.

Technical information & heat outputs

Order Code	Nominal Height (mm)	Nominal Length (mm)	Weight (kg)	Rated Watts
E070	505	604	4.50	70
E080	644	483	5.00	55
E090	638	584	5.80	75
E0130	886	584	6.70	100



TAMAR E090

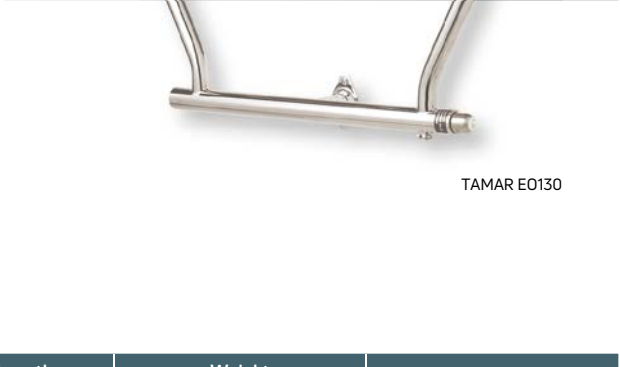

TAMAR E0130




INNOKO

Simple and attractive, INNOKO has been designed with a small bathroom, kitchen or cloakroom in mind. This electric towel warmer is available in straight or curved models with left and right hand options. INNOKO is easy to install, virtually maintenance free and can be used alongside KICKSPACE® to provide the perfect drying and heating solution for any kitchen, see page 142. Fitted with APM® technology, the INNOKO is manufactured from brass with a high quality chrome plated finish.



INNOKO CURVED
(RIGHT HAND CONNECTION)

Dimensions

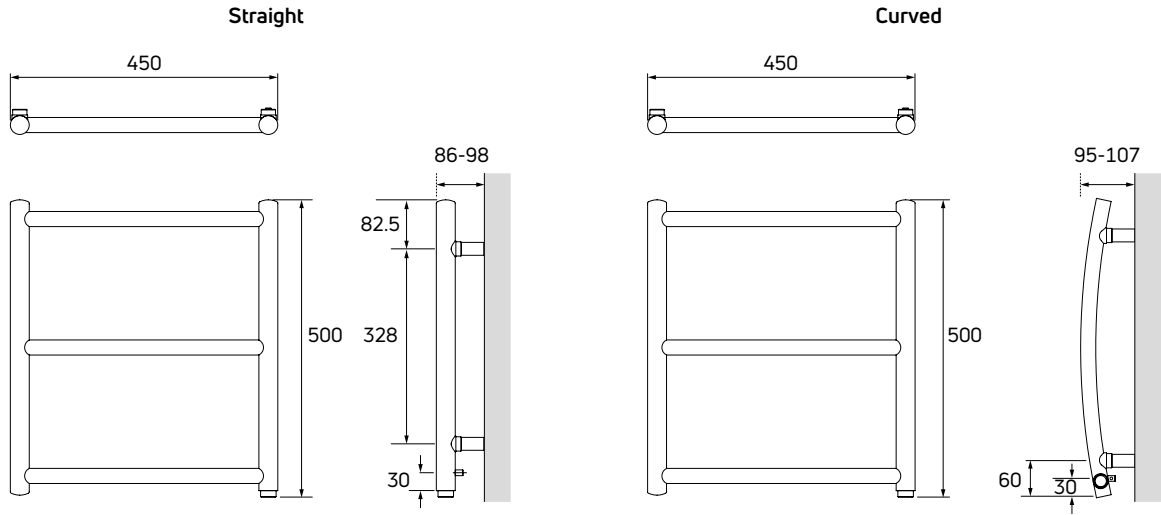

NB: All measurements are nominal.

General specification

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2015, environmental management system - ISO 14001:2015 and Occupational health and safety management system - OHSAS 18001. Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU and the EMC Directive 2014/30/EU.
- ACCESSORIES**
Please see page 138.
- SEALED ELECTRIC**
- IP RATING**
IP64.
- DELIVERY**
Non-stocked item: 8 -12 weeks.
- APM® TECHNOLOGY**
Fitted with the latest APM® element technology. Please see page 257.
- WASTE DISPOSAL**
According to The WEEE Directive (2012/19/EU). Please see page 257.
- ECO DESIGN DIRECTIVE**
Out of Scope. Towel warmers exempt from Directive.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- COLOUR**
Finished in chrome.
- MATERIAL**
Manufactured from steel. Filled with a glycol mix, part water/part anti-freeze.



INNOKO STRAIGHT
(RIGHT HAND CONNECTION)

For more general information, please see page 256.

Technical information & heat outputs

INNOKO straight

Order Code	Connection Position	Nominal Height (mm)	Nominal Length (mm)	Weight (kg)	Rated Watts
PETSCL	LEFT	500	500	5.0	40
PETSCR	RIGHT	500	500	5.0	40

INNOKO curved

PETCCL	LEFT	500	500	5.0	40
PETCCR	RIGHT	500	500	5.0	40



ELECTRIC UNDERFLOOR HEATING

MYSON electric underfloor heating is a great alternative for small areas where hydronic underfloor heating is not suitable, such as kitchens, bathrooms, and conservatories. It is ideal for self-builds, renovations and extensions and is extremely easy to install, with no need for specialist tools, skills or groundwork.

It provides instant heat whenever you need it and everything you need is packed and supplied in one box. It comes in a range of sizes from 1m² - 10m², and can be installed on to either tile cement, or screeded floors up to 20m². The one box solution contains an electric mat, digital clock thermostat, control card, floor sensor, sensor tube, multimeter and installation manual. Electric underfloor heating can be used under tile, stone or wood floorings*.

*Please check manufacturer's guidelines

General specification

- ✓

CERTIFICATION
Produced under a quality management system - ISO 9001:2015. Carries the CE mark and conforms to the Low Voltage Directive 2014/35/EU.
- 10

GUARANTEE
Electric Mat:
10 year guarantee from date of purchase against manufacturing defects.
- 2

GUARANTEE
Thermostat & Sensor:
2 year guarantee from date of purchase against manufacturing defects.
- ⚡

SEALED ELECTRIC
- IP

IP RATING
IP30.
- 🚚

DELIVERY
2 - 5 working days.
- 📈

PERFORMANCE
Quick warm up delivering 150W/m².
- 🗑️

WASTE DISPOSAL
According to The WEEE Directive (2012/19/EU). Please see page 257.
- ♻️

ECO DESIGN DIRECTIVE
Out of scope.
Exempt from Directive.

For more general information, please see page 256.



ELECTRIC UNDERFLOOR PACK

Order Code	Size m²
UF1M	1
UF1.5M	1.5
UF2M	2
UF2.5M	2.5
UF3M	3
UF3.5M	3.5
UF4M	4
UF4.5M	4.5
UF5M	5
UF6M	6
UF7M	7
UF8M	8
UF9M	9
UF10M	10

Can be used under:





Heating valves

MYSON has been manufacturing heating valves for over 50 years, producing millions of units on an annual basis. Using environmentally friendly chrome 3 for our manual valves and TRV products, our high-quality heating valves are assembled in the UK, and all supplied using sustainable and responsible packaging.

The range covers cost-effective manual valves, thermostatically controlled valves, decorative valves and options specifically for our LST products. Our extensive offering means we have a solution for any application.

All MYSON valves are produced under ISO 9001:2008, so whichever of our products you choose, you are guaranteed they will be the highest quality.




MATCHMATE

The MATCHMATE range of radiator valves is ideal for use within central heating systems in the domestic housing market. They are available in a number of different models, including compression, pushfit, straight and angled, to suit varying specification requirements. All products are finished in chrome 3 and feature impact resistant valve caps, providing the highest quality at competitive prices. Drain off option also available on most products.




MATE15WAC


General specification




CERTIFICATION
Produced under a quality management system - ISO 9001:2008. Pressure tested in accordance with BS 2767.




GUARANTEE
2 year guarantee from date of purchase against manufacturing defects.




COLOUR
Finished in chrome.




CONNECTIONS
Compression and pushfit.



OPERATING PRESSURES
Operating pressure 10 bar (compression) and 3 bar (pushfit).



OPERATING TEMPERATURE
Operating temperature 120°C (compression) and 92°C (pushfit).



DELIVERY
2 - 5 working days.

For more general information, please see page 256.

MATCHMATE compression

Description	Colour (Top)	Wheel Head Order Code	Lockshield Order Code	Minimum Order Qty
½" Imperial Olive Compression Angle Chrome - Republic of Ireland only	White	MATE1/2WAC	MATE1/2LAC	10
½" Imperial Olive Compression Angle Chrome Drain Off - Republic of Ireland only	White	-	MATE1/2LACD	10
½" Imperial Olive Compression Straight Chrome - Republic of Ireland only	White	MATE1/2WSC	MATE1/2LSC	10
10mm Angle Chrome	White	MATE10WAC	MATE10LAC	10
10mm Angle Chrome C/W Compression 90° Elbow	White	MATE10WAC90	MATE10LAC90	10
10mm Angle Chrome Drain Off	White	-	MATE10LACD	10
10mm Angle Chrome Drain Off C/W Compression 90° Elbow	White	-	MATE10LACD90	10
15mm Angle Chrome	White	MATE15WAC	MATE15LAC	10
15mm Angle Chrome Drain Off	White	-	MATE15LACD	10
15mm Straight Chrome	White	MATE15WSC	MATE15LSC	10

MATCHMATE pushfit

10mm Angle Chrome C/W Pushfit 90° Elbow	White	MATE10WACPF90	MATE10LACPF90	10
10mm Angle Chrome Drain Off C/W Pushfit 90° Elbow	White	-	MATE10LACDPF90	10
10mm Angle Chrome Drain Off Pushfit	White	-	MATE10LACDPF	10
10mm Angle Chrome Pushfit	White	MATE10WACPF	MATE10LACPF	10
10mm Straight Chrome Pushfit	White	-	MATE10LSCPF	10
15mm Angle Chrome C/W Pushfit 90° Elbow	White	MATE15WACPF90	MATE15LACPF90	10
15mm Angle Chrome Drain Off C/W Pushfit 90° Elbow	White	-	MATE15LACDPF90	10
15mm Angle Chrome Pushfit	White	MATE15WACPF	MATE15LACPF	10


MATCHMATE accessories

MATCHMATE Top Only	White	MATEWHTOP	MATELSTOP	20
--------------------	-------	-----------	-----------	----


Technical information

Dimensions


Angle (ANG1/2/3)



Straight (STR1/2/3)




Drain Off (DRA1/2/3)

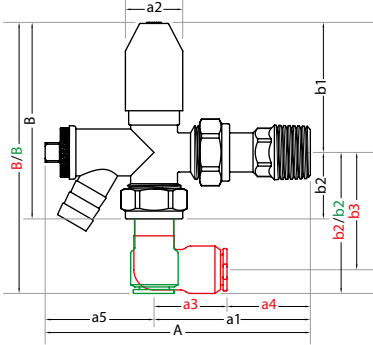

DRAWING REFERENCE: 1 = Standard (Black); 2 = Pushfit (Green & Black); 3 = Pushfit 90° Elbow (Red & Black). Drawings for illustration purposes only.

Model	DWG Ref.	A (mm)	a1 (mm)	a2 (mm)	a3 (mm)	a4 (mm)	a5 (mm)	B (mm)	b1 (mm)	b2 (mm)	b3 (mm)
MATCHMATE											
½" Imperial Olive Compression Wheelhead Angle Chrome - Republic of Ireland only	ANG1	76	60	31	-	-	-	75	50	25	-
½" Imperial Olive Compression Lockshield Angle Chrome - Republic of Ireland only	ANG1	73	60	22	-	-	-	75	50	25	-
½" Imperial Olive Compression Lockshield Angle Chrome Drain Off - Republic of Ireland only	DRA1	102	60	22	-	-	-	75	50	25	-
½" Imperial Olive Compression Wheelhead Straight Chrome - Republic of Ireland only	STR1	83	56	31	-	-	27	67	54	13	-
½" Imperial Olive Compression Lockshield Straight Chrome - Republic of Ireland only	STR1	83	56	22	-	-	27	67	54	13	-
10mm Wheelhead Angle Chrome	ANG1	76	60	31	-	-	-	75	50	25	-
10mm Lockshield Angle Chrome	ANG1	72	60	22	-	-	-	75	50	25	-
10mm Lockshield Angle Chrome C/W Compression 90° Elbow	ANG3	73	60	22	30	30	-	107	50	57	46
10mm Lockshield Angle Chrome Drain Off	DRA1	102	60	22	-	-	42	77	50	27	-
10mm Wheelhead Angle Chrome C/W Compression 90° Elbow	ANG3	73	60	31	30	30	-	107	50	27	46
10mm Lockshield Angle Chrome Drain Off C/W Compression 90° Elbow	DRA3	102	60	22	30	30	42	107	50	27	46
15mm Wheelhead Angle Chrome	ANG1	76	60	31	-	-	-	75	50	25	-
15mm Lockshield Angle Chrome	ANG1	73	60	22	-	-	-	75	50	25	-
15mm Lockshield Angle Chrome Drain Off	DRA1	102	60	22	-	-	42	75	50	25	-
15mm Wheelhead Straight Chrome	STR1	83	56	31	-	-	27	67	54	13	-
15mm Lockshield Straight Chrome	STR1	83	56	22	-	-	27	67	54	13	-
MATCHMATE PUSHFIT											
10mm Wheelhead Angle Chrome C/W Pushfit 90° Elbow	ANG3	76	60	31	28	32	-	104	50	54	45
10mm Lockshield Angle Chrome C/W Pushfit 90° Elbow	ANG3	73	60	22	28	32	-	104	50	54	45
10mm Lockshield Angle Chrome Drain Off C/W Pushfit 90° Elbow	DRA3	102	60	22	28	32	42	104	50	54	45
10mm Lockshield Angle Chrome Drain Off Pushfit	DRA2	102	60	22	-	-	42	95	50	45	-
10mm Wheelhead Angle Chrome Pushfit	ANG2	76	60	31	-	-	-	95	50	45	-
10mm Lockshield Angle Chrome Pushfit	ANG2	73	60	22	-	-	-	95	50	45	-
10mm Lockshield Straight Chrome Pushfit	STR2	104	60	22	-	-	48	67	54	13	-
15mm Wheelhead Angle Chrome C/W Pushfit 90° Elbow	ANG3	76	60	31	35	25	-	112	50	62	50
15mm Lockshield Angle Chrome C/W Pushfit 90° Elbow	ANG3	73	60	22	35	25	-	112	50	62	50
15mm Lockshield Angle Chrome Drain Off C/W Pushfit 90° Elbow	DRA3	102	60	22	35	25	42	112	50	62	50
15mm Wheelhead Angle Chrome Pushfit	ANG2	76	60	31	-	-	-	108	50	59	-
15mm Lockshield Angle Chrome Pushfit	ANG2	73	60	22	-	-	-	108	50	58	-

NB: All measurements are nominal.



MATE15LSC



MATE10LACPF90



MATE15LACPF



MATCHMASTER

MATCHMASTER is a high-quality range of chrome finish heating valves, making them ideal for when a more robust specification is required. The valve uses a graphite gland packing which can be easily compressed by tightening the gland nut to ensure many years of trouble-free operation. There is a wide choice of compression and pushfit connections, as well as drain off options. Straight and angled options are also available.



MASTER15WAC

General specification



CERTIFICATION

Produced under a quality management system - ISO 9001:2008. Conforms to BS 2767-10.



GUARANTEE

2 year guarantee from date of purchase against manufacturing defects.



COLOUR

Finished in chrome.



CONNECTIONS

Compression and pushfit.



OPERATING PRESSURES

Operating pressure 10 bar (compression) and 3 bar (pushfit).



OPERATING TEMPERATURE

Operating temperature 120°C (compression) and 92°C (pushfit).



DELIVERY

2 - 5 working days.

For more general information, please see page 256.

MATCHMASTER compression



Description	Colour (Top)	Wheel Head Order Code	Lockshield Order Code	Minimum Order Qty
½" Imperial Olive Compression Angle Chrome - Republic of Ireland only	White	MASTER1/2WAC	MASTER1/2LAC	10
½" Imperial Olive Compression Straight Chrome - Republic of Ireland only	White	MASTER1/2WSC	MASTER1/2LSC	10
10mm Angle Chrome	White	MASTER10WAC	MASTER10LAC	10
10mm Angle Chrome Drain Off	White	-	MASTER10LACD	10
15mm Angle Chrome	White	MASTER15WAC	MASTER15LAC	10
15mm Angle Chrome Drain Off	White	-	MASTER15LACD	10
15mm Straight Chrome	White	MASTER15WSC	MASTER15LSC	10
15mm or ½" BSP Angle Chrome	White	MASTER151/2WAC	MASTER151/2LAC	10
15mm or ½" BSP Straight Chrome	White	MASTER151/2WSC	MASTER151/2LSC	10

MATCHMASTER pushfit



10mm Angle Chrome C/W Pushfit 90° Elbow	White	MASTER10WACPF90	MASTER10LACPF90	10
10mm Angle Chrome Drain Off C/W Pushfit 90° Elbow	White	-	MASTER10LACDPF90	10
10mm Angle Chrome Pushfit	White	MASTER10WACPF	MASTER10LACPF	10
10mm Straight Chrome Pushfit	White	-	MASTER10LSCPF	10
10mm Straight Chrome Pushfit 90° Elbow	White	MASTER10WSCPF90	MASTER10LSCPF90	10
15mm Angle Chrome C/W Pushfit 90° Elbow	White	-	MASTER15LACPF90	10
15mm Angle Chrome Drain Off C/W Pushfit 90° Elbow	White	-	MASTER15LACDPF90	10
15mm Angle Chrome Drain Off Pushfit	White	-	MASTER15LACDPF	10
15mm Straight Chrome C/W Pushfit 90° Elbow	White	-	MASTER15LSCPF90	10


MATCHMASTER accessories

MATCHMASTER Top Only	White	MASTERWHTOP	MASTERLSTOP	10
----------------------	-------	-------------	-------------	----


Technical information

Dimensions


Angle (ANG1/2/3)

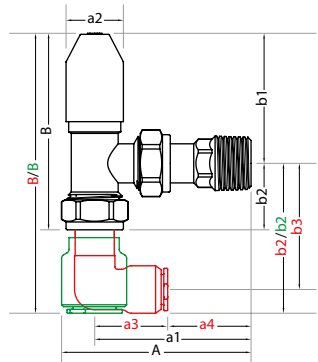

Straight (STR1/2/3)



Drain Off (DRA1/2/3)

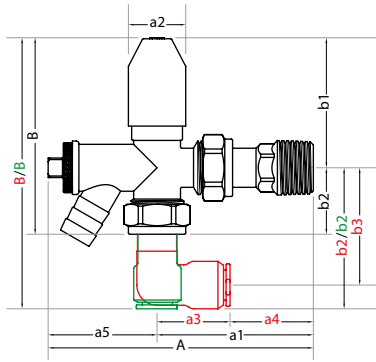

DRAWING REFERENCE: 1 = Standard (Black); 2 = Pushfit (Green & Black); 3 = Pushfit 90° Elbow (Red & Black). Drawings for illustration purposes only.

Model	DWG Ref.	A (mm)	a1 (mm)	a2 (mm)	a3 (mm)	a4 (mm)	a5 (mm)	B (mm)	b1 (mm)	b2 (mm)	b3 (mm)
MATCHMASTER											
½" Imperial Olive Compression Lockshield Angle Chrome - Republic of Ireland only	ANG1	73	60	27	-	-	-	77	49	28	-
½" Imperial Olive Compression Wheelhead Angle Chrome - Republic of Ireland only	ANG1	79	60	37	-	-	-	81	53	28	-
½" Imperial Olive Compression Lockshield Straight Chrome - Republic of Ireland only	STR1	92	60	27	-	-	32	70	57	13	-
½" Imperial Olive Compression Wheelhead Straight Chrome - Republic of Ireland only	STR1	92	60	37	-	-	32	77	64	13	-
10mm Lockshield Angle Chrome	ANG1	73	60	27	-	-	-	79	49	30	-
10mm Wheelhead Angle Chrome	ANG1	79	60	37	-	-	-	83	53	30	-
10mm Lockshield Angle Chrome Drain Off	DRA1	88	75	27	-	-	-	79	49	30	-
15mm Lockshield Angle Chrome	ANG1	73	60	27	-	-	-	77	49	28	-
15mm Wheelhead Angle Chrome	ANG1	79	60	37	-	-	-	81	53	28	-
15mm Lockshield Angle Chrome Drain Off	DRA1	88	75	27	-	-	-	77	49	28	-
15mm Lockshield Straight Chrome	STR1	92	60	27	-	-	32	70	57	13	-
15mm Wheelhead Straight Chrome	STR1	92	60	37	-	-	32	77	64	13	-
15mm or ½" BSP Lockshield Angle Chrome	ANG1	75	60	27	-	-	-	85	49	36	-
15mm or ½" BSP Wheelhead Angle Chrome	ANG1	79	60	37	-	-	-	89	53	36	-
15mm or ½" BSP Lockshield Straight Chrome	STR1	99	60	27	-	-	39	72	58	14	-
15mm or ½" BSP Wheelhead Straight Chrome	STR1	99	60	37	-	-	39	79	65	14	-
MATCHMASTER PUSHFIT											
10mm Lockshield Angle Chrome C/W Pushfit 90° Elbow	ANG3	73	60	27	28	32	-	107	49	58	49
10mm Wheelhead Angle Chrome C/W Pushfit 90° Elbow	ANG3	79	60	37	28	32	-	107	49	58	49
10mm Lockshield Angle Chrome Drain Off C/W Pushfit 90° Elbow	DRA3	88	75	27	28	47	41	107	49	58	49
10mm Lockshield Angle Chrome Pushfit	ANG2	73	60	27	-	-	-	96	49	47	-
10mm Wheelhead Angle Chrome Pushfit	ANG2	79	60	37	-	-	-	100	53	47	-
10mm Lockshield Straight Chrome Pushfit	STR2	111	60	27	-	-	51	70	57	-	-
10mm Wheelhead Straight Chrome 90° Elbow	STR3	111	60	37	-	-	51	76	64	-	-
10mm Lockshield Straight Chrome Pushfit 90° Elbow	STR3	116	60	27	28	-	56	85	57	-	-
15mm Lockshield Angle Chrome C/W Pushfit 90° Elbow	ANG3	73	60	27	35	26	-	116	49	67	-
15mm Lockshield Angle Chrome Drain Off C/W Pushfit 90° Elbow	DRA3	88	75	27	35	41	41	116	49	67	55
15mm Lockshield Angle Chrome Drain Off Pushfit	DRA2	76	60	27	-	-	-	108	50	58	-
15mm Lockshield Straight Chrome C/W Pushfit 90° Elbow	STR3	116	60	27	-	-	56	108	50	58	-

NB: All measurements are nominal



MASTER15LAC



MASTER15LSC



PUSHFIT
OPTION AVAILABLE



MASTER10LSCPF90



FULLFLOW


FULLFLOW radiator valves are designed and manufactured to meet the requirements of commercial installations. They feature a non-rising spindle, double EPDM ‘O’ ring gland seals with an additional ‘O’ ring back seating arrangement, this enables the FULLFLOW valve to be serviced without the requirement for draining the system, perfect for commercial applications. The range includes compression and screwed iron connections. Straight and angle versions are also available. Product is only available in polished chrome.



FF1512WAC

Technical information

Dimensions

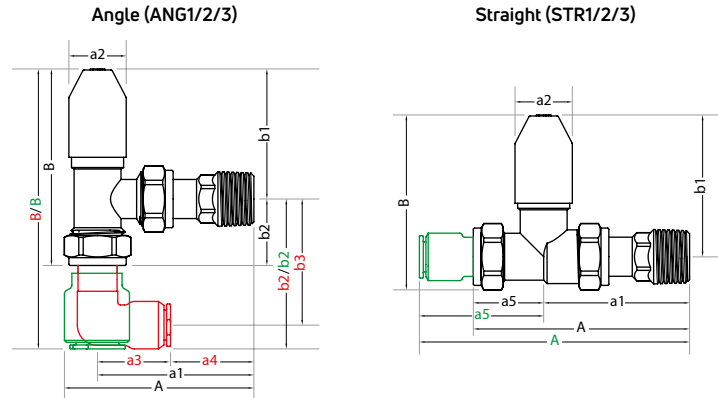

DRAWING REFERENCE: 1 = Standard (Black); 2 = Pushfit (Green & Black); 3 = Pushfit 90° Elbow (Red & Black). Drawings for illustration purposes only.

Model	DWG Ref.	A	a1	a2	B	b1	b2
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
FULLFLOW							
15mm / ½" Copper or ½" BSP Lockshield Angle Polished Chrome	ANG1	75	57	36	90	52	38
15mm / ½" Copper or ½" BSP Lockshield Straight Polished Chrome	STR1	96	57	36	75	61	14
15mm / ½" Copper or ½" BSP Wheelhead Angle Polished Chrome	ANG1	78	57	42	95	57	38
15mm / ½" Copper or ½" BSP Wheelhead Straight Polished Chrome	STR1	96	57	42	80	66	14

NB: All measurements are nominal

General specification

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2008. Conforms to BS 2767-10.
- OPERATING PRESSURES**
Operating pressure 10 bar.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- OPERATING TEMPERATURE**
Operating temperature 120°C.
- COLOUR**
Finished in polished chrome.
- DELIVERY**
2 - 5 working days.
- CONNECTIONS**
Compression and screwed iron.

For more general information, please see page 256.



FF1512LAC

FULLFLOW

Description	Colour (Top)	Order Code	Minimum Order Qty
15mm / ½" Copper or ½" BSP Lockshield Angle Polished Chrome	White	FF151/2LAC	10
15mm / ½" Copper or ½" BSP Lockshield Straight Polished Chrome	White	FF151/2LSC	10
15mm / ½" Copper or ½" BSP Wheelhead Angle Polished Chrome	White	FF151/2WAC	10
15mm / ½" Copper or ½" BSP Wheelhead Straight Polished Chrome	White	FF151/2WSC	10


FULLFLOW accessories


FULLFLOW Lockshield & Wheelhead Tops Only	White	FFLSWHTOPS	10
---	-------	------------	----







General specification


- 


CERTIFICATION
Produced under a quality management system - ISO 9001:2008.
Conforms to BS 2767-10.
- 


GUARANTEE
2 year guarantee from date of purchase against manufacturing defects.
- 

COLOUR
Finished in polished chrome.
- 

CONNECTIONS
Compression and pushfit.

- 

OPERATING PRESSURES
Operating pressure 10 bar (compression) and 3 bar (pushfit).
- 

OPERATING TEMPERATURE
Operating temperature 120°C (compression) and 92°C (pushfit).
- 

DELIVERY
2 - 5 working days.

For more general information, please see page 256.

DECORATIVE

Description	Colour (Top)	Order Code	Minimum Order Qty
15mm TRV Angle Polished Chrome	Polished Chrome	DECTRV15AC	1
15mm TRV Straight Polished Chrome	Polished Chrome	DECTRV15SC	1

DECORATIVE pushfit

10mm TRV Angle Polished Chrome C/W Pushfit 90° Elbow	Polished Chrome	DECTRV10ACPF90	1
10mm TRV Straight Polished Chrome C/W Pushfit 90° Elbow	Polished Chrome	DECTRV10SCPF90	1
15mm TRV Angle Polished Chrome C/W Pushfit 90° Elbow	Polished Chrome	DECTRV15ACPF90	1
15mm TRV Straight Polished Chrome C/W Pushfit 90° Elbow	Polished Chrome	DECTRV15SCPF90	1

DECORATIVE pack


Radpack 15mm TRV & Lockshield Pack Angle Polished Chrome	Polished Chrome	DECPAK15AC	1
Radpack 15mm TRV & Lockshield Pack Straight Polished Chrome	Polished Chrome	DECPAK15SC	1

DECORATIVE accessories

15mm TRV Angle Polished Chrome Body Only	Polished Chrome	DECTRV15ACBODY	1
15mm TRV Straight Polished Chrome Body Only	Polished Chrome	DECTRV15SCBODY	1
Decorative Thermostatic Head Only Chrome	Polished Chrome	DECTRVHEADC	1

Technical information

Dimensions

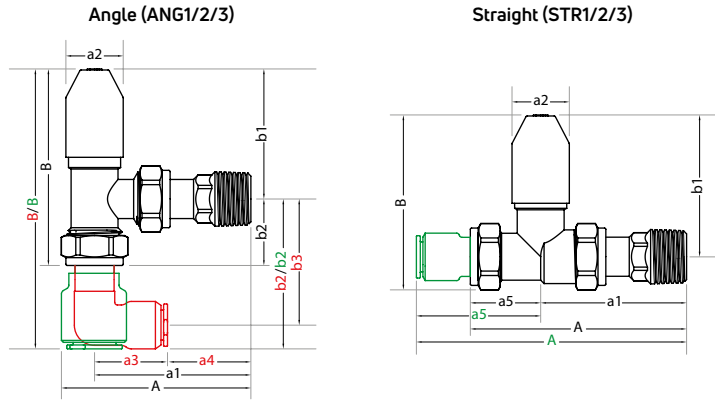

DRAWING REFERENCE: 1 = Standard (Black); 2 = Pushfit (Green & Black); 3 = Pushfit 90° Elbow (Red & Black). Drawings for illustration purposes only.

Model	DWG Ref.	A (mm)	a1 (mm)	a2 (mm)	a3 (mm)	a4 (mm)	a5 (mm)	B (mm)	b1 (mm)	b2 (mm)	b3 (mm)
DECORATIVE											
15mm TRV Angle Polished Chrome	ANG1	86	62	49	-	-	-	133	104	29	-
15mm TRV Straight Polished Chrome	STR1	98	62	49	-	-	36	120	108	-	-
DECORATIVE PUSHFIT											
10mm TRV Angle Polished Chrome C/W Pushfit 90° Elbow	ANG3	86	62	49	28	34	-	158	104	54	45
10mm TRV Straight Polished Chrome C/W Pushfit 90° Elbow	STR3	124	62	49	28	-	62	136	108	28	53
15mm TRV Angle Polished Chrome C/W Pushfit 90° Elbow	ANG3	86	62	49	35	28	-	167	104	63	50
15mm TRV Straight Polished Chrome C/W Pushfit 90° Elbow	STR3	130	62	49	35	-	68	142	108	35	55
DECORATIVE ACCESSORIES											
15mm TRV Angle Polished Chrome Body Only	ANG1	80	62	35	-	-	-	64	35	29	-
15mm TRV Straight Polished Chrome Body Only	STR1	98	62	35	-	-	36	52	39	13	-

NB: All measurements are nominal.





DEC_10LWACSLIM - SLIMLINE



DEC15LWACTRAD - TRADITIONAL




DEC_10LWACSLIM - SLIMLINE




DEC15LWACTRAD - TRADITIONAL


General specification

- 


CERTIFICATION
Produced under a quality management system - ISO 9001:2008. Conforms to BS 2767-10.




OPERATING PRESSURES
Operating pressure 10 bar (compression) and 3 bar (pushfit).




OPERATING TEMPERATURE
Operating temperature 120°C (compression) and 92°C (pushfit).




DELIVERY
2 - 5 working days.



GUARANTEE
2 year guarantee from date of purchase against manufacturing defects.



COLOUR
Finished in polished chrome.



CONNECTIONS
Compression and pushfit.

For more general information, please see page 256.

DECORATIVE


Description	Colour (Top)	Order Code	Minimum Order Qty
15mm Lockshield or Wheelhead Angle Polished Chrome - Slimline	Polished Chrome	DEC15LWACSLIM	1
15mm Lockshield or Wheelhead Straight Polished Chrome - Slimline	Polished Chrome	DEC15LWSCSLIM	1
15mm Lockshield or Wheelhead Angle Polished Chrome - Modern	Polished Chrome	DEC15LWAC	1
15mm Lockshield or Wheelhead Straight Polished Chrome - Modern	Polished Chrome	DEC15LWSC	1
15mm Lockshield or Wheelhead Angle Polished Chrome - Traditional	Polished Chrome	DEC15LWACTRAD	1
15mm Lockshield or Wheelhead Straight Polished Chrome - Traditional	Polished Chrome	DEC15LWSCTRAD	1

DECORATIVE pushfit


10mm Lockshield or Wheelhead Angle Polished Chrome C/W Pushfit 90° Elbow - Modern	Polished Chrome	DEC10LWACPF90	1
10mm Lockshield or Wheelhead Straight Polished Chrome C/W Pushfit 90° Elbow - Modern	Polished Chrome	DEC10LWSCPF90	1
15mm Lockshield or Wheelhead Angle Polished Chrome C/W Pushfit 90° Elbow - Modern	Polished Chrome	DEC15LWACPF90	1
15mm Lockshield or Wheelhead Straight Polished Chrome C/W Pushfit 90° Elbow - Modern	Polished Chrome	DEC15LWSCPF90	1

Technical information

Dimensions

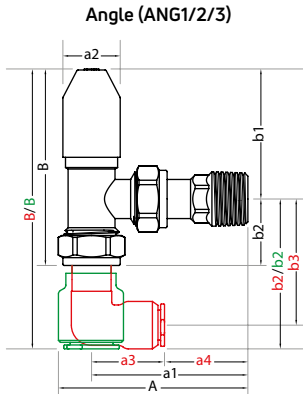

Angle (ANG1/2/3)




Straight (STR1/2/3)


DRAWING REFERENCE: 1 = Standard (Black); 2 = Pushfit (Green & Black); 3 = Pushfit 90° Elbow (Red & Black). Drawings for illustration purposes only.

Model	DWG Ref.	A	a1	a2	a3	a4	a5	B	b1	b2	b3
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
DECORATIVE											
15mm Lockshield or Wheelhead Angle Polished Chrome - Slimline	ANG1	75	60	31	-	-	-	72	44	28	-
15mm Lockshield or Wheelhead Straight Polished Chrome - Slimline	STR1	95	60	31	-	-	35	67	55	12	-
15mm Lockshield or Wheelhead Angle Polished Chrome - Modern	ANG1	70	55	31	-	-	-	88	54	34	-
15mm Lockshield or Wheelhead Straight Polished Chrome - Modern	STR1	85	53	31	-	-	32	73	57	16	-
15mm Lockshield or Wheelhead Angle Polished Chrome - Traditional	ANG1	86	55	63	-	-	-	111	77	34	-
15mm Lockshield or Wheelhead Straight Polished Chrome - Traditional	STR1	87	51	63	-	-	36	97	80	17	-
DECORATIVE PUSHFIT											
10mm Lockshield or Wheelhead Angle Polished Chrome C/W Pushfit 90° Elbow - Modern	ANG3	70	55	31	30	25	-	110	54	56	47
10mm Lockshield or Wheelhead Straight Polished Chrome C/W Pushfit 90° Elbow - Modern	STR3	106	51	31	-	-	55	86	57	29	-
15mm Lockshield or Wheelhead Angle Polished Chrome C/W Pushfit 90° Elbow - Modern	ANG3	70	55	31	34	21	-	119	54	65	52
15mm Lockshield or Wheelhead Straight Polished Chrome C/W Pushfit 90° Elbow - Modern	STR3	116	51	31	-	-	65	91	57	-	-


NB: All measurements are nominal.




DEC15LWSC



PUSHFIT
OPTION AVAILABLE




DEC10LWACPF90



DEC15LWSCSLIM


Traditional



DEC15LWSCTRAD


228 | Complete Heating Solutions 2023 (Sept23 edition)

Complete Heating Solutions 2023 (Sept23 edition) | 229



PETITE

The MYSON PETITE Thermostatic Radiator Valve is a beautifully designed TRV for today's heating systems. The PETITE combines attractive design with total reliability. It has a liquid sensor fitted at its heart, guaranteeing years of accurate temperature control. The PETITE is available as a single valve or a convenient 'TRV & manual' valve pack, in either 10mm or 15mm sizes with a chrome finish. The range includes compression and pushfit connections, with straight and angle options available.



PETTRV15AC

General specification

- 

CERTIFICATION

Produced under a quality management system - ISO 9001:2008 and complies to EN 215.
- 

GUARANTEE

2 year guarantee from date of purchase against manufacturing defects.
- 

COLOUR

Finished in chrome.
- 

CONNECTIONS

Compression and pushfit.
- 

OPERATING PRESSURES

Operating pressure 10 bar (compression) and 3 bar (pushfit).
- 

OPERATING TEMPERATURE

Operating temperature 120°C (compression) and 92°C (pushfit).
- 

DELIVERY

2 - 5 working days.

For more general information, please see page 256.

PETITE compression



Description	Colour (Top)	Order Code	Minimum Order Qty
10mm TRV Angle Chrome	White	PETTRV10AC	10
15mm TRV Angle Chrome	White	PETTRV15AC	10
15mm TRV Straight Chrome	White	PETTRV15SC	10

PETITE pushfit



10mm TRV Angle Chrome C/W Pushfit 90° Elbow	White	PETTRV10ACPF90	10
15mm TRV Angle Chrome C/W Pushfit 90° Elbow	White	PETTRV15ACPF90	10

PETITE pack

Radpack ½" Imperial Olive Compression PETITE TRV & MATCHMATE Lockshield Pack Angle Chrome - Republic of Ireland only	White	PETPAK1/2AC	10
Radpack 10mm PETITE TRV & MATCHMATE Lockshield Pack Angle Chrome	White	PETPAK10AC	10
Radpack 10mm PETITE TRV & MATCHMATE Lockshield Pack Angle Chrome Drain Off	White	PETPAK10ACD	10
Radpack 15mm PETITE TRV & MATCHMATE Lockshield Pack Angle Chrome	White	PETPAK15AC	10
Radpack 15mm PETITE TRV & MATCHMATE Lockshield Pack Angle Chrome Drain Off	White	PETPAK15ACD	10
Radpack 15mm PETITE TRV & MATCHMATE Lockshield Pack Straight Chrome	White	PETPAK15SC	10

PETITE pushfit pack




Radpack 10mm PETITE TRV & MATCHMATE Lockshield Pack Angle Chrome C/W Pushfit 90° Elbow	White	PETPAK10ACPF90	10
Radpack 10mm PETITE TRV & MATCHMATE Lockshield Pack Angle Chrome Drain Off C/W Pushfit 90° Elbow	White	PETPAK10ACDPF90	10

PETITE accessories

PETITE Thermostatic Head Only White	White	PETTRVHEADW	1
-------------------------------------	-------	-------------	---

Technical information


Dimensions

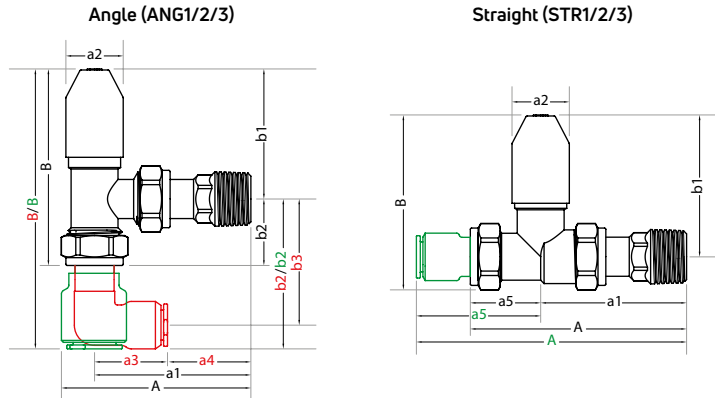


DRAWING REFERENCE: 1 = Standard (Black); 2 = Pushfit (Green & Black); 3 = Pushfit 90° Elbow (Red & Black). Drawings for illustration purposes only.





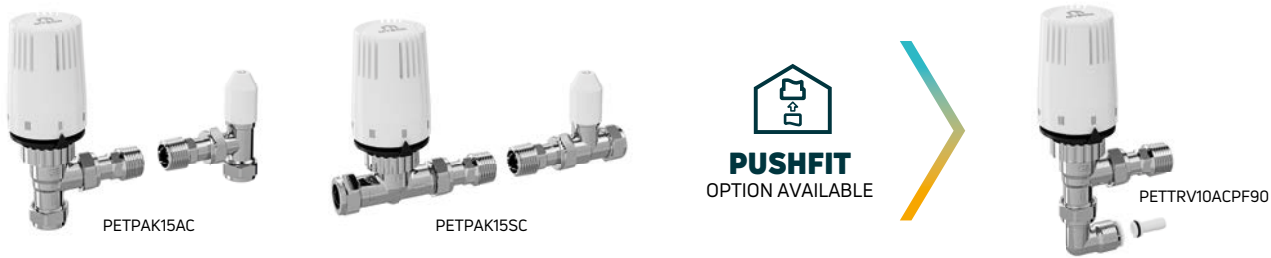

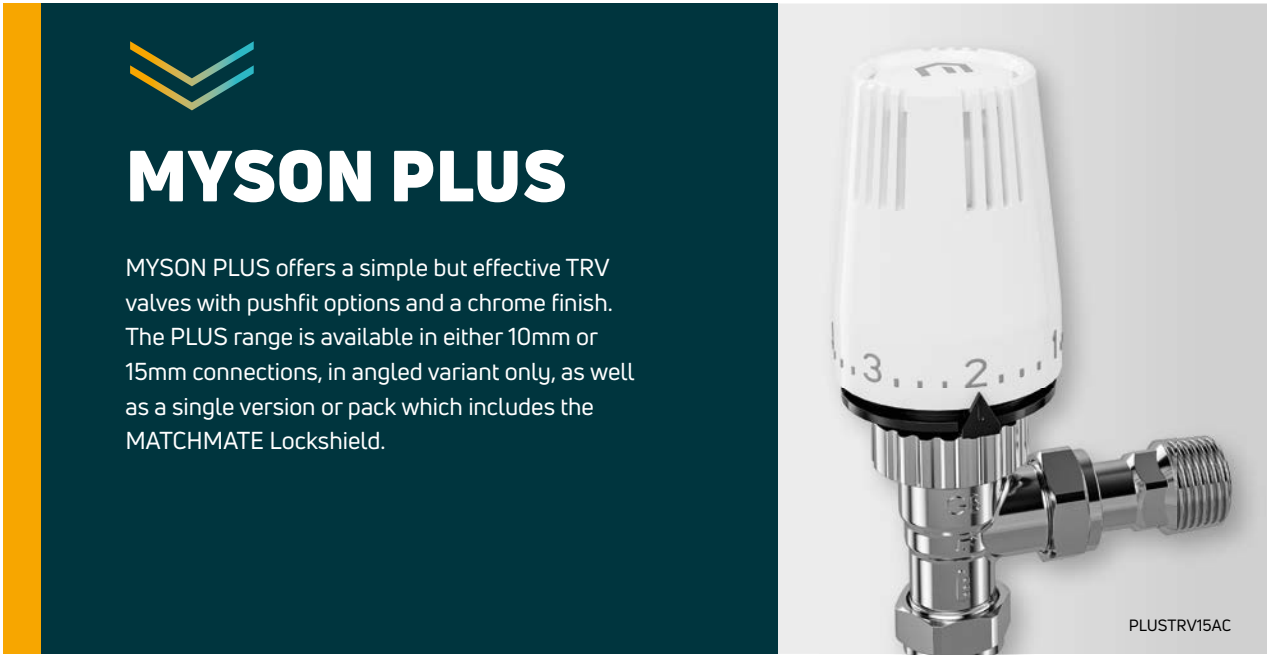
Model	DWG Ref.	A	a1	a2	a3	a4	a5	B	b1	b2	b3
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
PETITE											
10mm TRV Angle Chrome	ANG1	86	62	49	-	-	-	130	101	29	-
15mm TRV Angle Chrome	ANG1	86	62	49	-	-	-	130	101	29	-
15mm TRV Straight Chrome	STR1	103	67	49	-	-	36	114	101	13	-
PETITE PUSHFIT											
10mm TRV Angle Chrome C/W Pushfit 90° Elbow	ANG3	86	62	49	28	34	-	155	101	54	45
15mm TRV Angle Chrome C/W Pushfit 90° Elbow	ANG3	86	62	49	34	28	-	164	101	63	50

NB: All measurements are nominal.





General specification

-  **CERTIFICATION**
Produced under a quality management system - ISO 9001:2008. Pressure tested in accordance with BS 2767.
-  **OPERATING PRESSURES**
Operating pressure 10 bar (compression) and 3 bar (pushfit).
-  **GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
-  **OPERATING TEMPERATURE**
Operating temperature 120°C (compression) and 92°C (pushfit).
-  **COLOUR**
Finished in chrome.
-  **DELIVERY**
2 - 5 working days.
-  **CONNECTIONS**
Compression and pushfit.



For more general information, please see page 256.

MYSON PLUS

Description	Colour (Top)	Order Code	Minimum Order Qty
10mm TRV Angle Chrome	White	PLUSTRV10AC	50
15mm TRV Angle Chrome	White	PLUSTRV15AC	50

MYSON PLUS pushfit

15mm TRV Angle Chrome Pushfit	White	PLUSTRV15ACPF	50
15mm Wheelhead Angle Chrome Pushfit	White	PLUS15WACPF	10
15mm Lockshield Angle Chrome Pushfit	White	PLUS15LACPF	10

MYSON PLUS pack


Radpack 10mm Plus TRV & MATCHMATE Lockshield Pack Angle Chrome	White	PLUSPAK10AC	50
Radpack 10mm Plus TRV & MATCHMATE Lockshield Pack Angle Chrome Drain Off	White	PLUSPAK10ACD	50
Radpack 15mm Plus TRV & MATCHMATE Lockshield Pack Angle Chrome	White	PLUSPAK15AC	50
Radpack 15mm Plus TRV & MATCHMATE Lockshield Pack Angle Chrome Drain Off	White	PLUSPAK15ACD	50

MYSON PLUS accessories

MYSON PLUS Thermostatic Head Only White	White	PLUSTRVHEADW	1
---	-------	--------------	---

Technical information

Dimensions

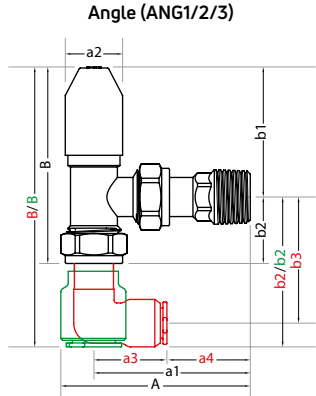

DRAWING REFERENCE: 1 = Standard (Black); 2 = Pushfit (Green & Black). Drawings for illustration purposes only.

Model	DWG Ref.	A (mm)	a1 (mm)	a2 (mm)	B (mm)	b1 (mm)	b2 (mm)
MYSON PLUS							
10mm TRV Angle Chrome	ANG1	86	62	49	130	101	29
15mm TRV Angle Chrome	ANG1	86	62	49	130	101	29
MYSON PLUS PUSHFIT							
15mm TRV Angle Chrome Pushfit	ANG2	86	62	49	135	101	34
15mm Wheelhead Angle Chrome Pushfit	ANG2	76	60	31	84	50	34
15mm Lockshied Angle Chrome Pushfit	ANG2	72	60	22	84	50	34

NB: All measurements are nominal.





LST TRV KITS

MYSON offer a flexible and comprehensive range of chrome TRV kits that are specifically designed to maximise the effectiveness of our range of LST radiators. For information on our LST range please see page 40.

Kits supplied with 'A' rated TRVs for energy efficiency

DIRECTFIT

We offer three designs, the Close Coupled Kit and the Universal Close Coupled Kit, which allows the case to be removed for cleaning without removing the TRV head, and the competitively priced Direct Fit Kit. All of the kits come with our A-rated TRV and are expertly designed for precision control.

The kits allow the thermal sensing head of a MYSON Thermostatic Radiator Valve to be mounted directly onto the LST enclosure of a MYSON Low Surface Temperature Radiators. They also feature a locking facility that prevents unauthorised adjustment in public areas.

General specification

CERTIFICATION
Produced under a quality management system - ISO 9001:2008. Manual valve conforms to BS 2767-10 and TRV complies to EN 215-1.

GUARANTEE
2 year guarantee from date of purchase against manufacturing defects.

COLOUR
Finished in chrome.

CONNECTIONS
Compression and screwed iron (direct fit only).

OPERATING PRESSURES
Operating pressure 10 bar (compression).


OPERATING TEMPERATURE
Operating temperature 120°C (compression).

DELIVERY
2 - 5 working days.

For more general information, please see page 256.

Direct fit TRV kit


Available for all LST's **except Vertical and 420mm wide**. Suitable for TBOE connection only. This kit allows a MYSON TRV to be mounted directly onto the internal radiator, making it an integral part of the LST radiator. This option utilises the 38mm knock out in the LST casing.

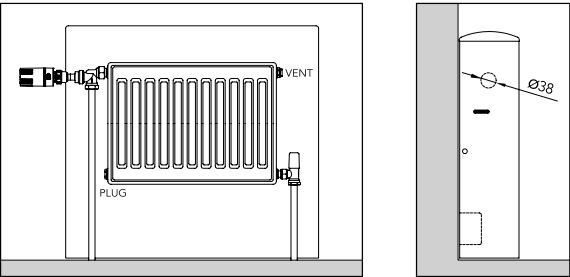

Direct Fit TRV Kit comprises:
1 x Horizontal angle TRV body
1 x TRV head
1 x Extension adaptor
1 x Plastic bush
1 x MATCHMASTER lockshield valve
Order Code: LSTDIRECTKITUK

Close coupled TRV kit


Available for all LST's **except Vertical and 420mm wide**. Suitable for TBOE, TBSE or BOE connections. This kit allows the MYSON TRV to be mounted directly onto the LST casing, with a choice of positions for both the TRV head and TRV angled valve body. This option utilises the 23mm knock out on the LST casing.

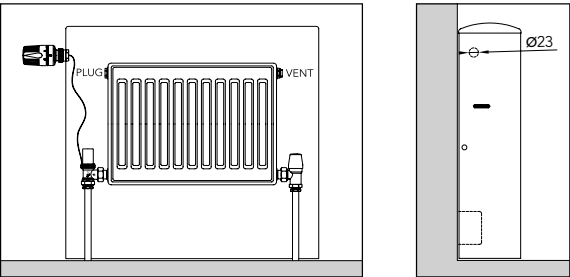

Close Coupled TRV Kit comprises:
1 x TRV head**
1 x TRV angled body**
1 x LST capillary unit/actuator/sensor head adaptor
1 x MATCHMASTER angled lockshield valve
1 x Locking tool
Order Code: LSTCCKITUK

Universal close coupled TRV kit†

Available for all LST's. Suitable for TBOE, TBSE or BOE connections. This kit allows the MYSON TRV to be mounted directly onto the LST casing, with a choice of positions for both the TRV head and TRV straight valve body. This option utilises the 23mm knock out on the LST casing.

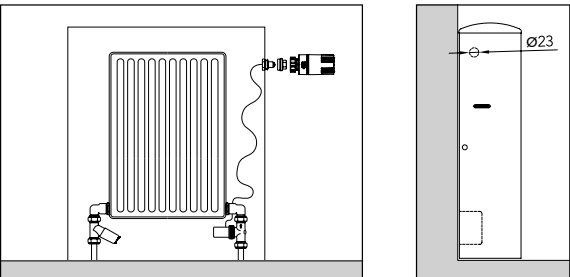

Universal Close Coupled TRV Kit Comprises:
1 x TRV head**
1 x TRV straight body**
1 x LST capillary unit/actuator/sensor head adaptor
1 x MATCHMASTER straight lockshield valve
2 x Integration elbows
Order Code: LSTUNIKITUK

†For LST Vertical instructions, please refer to page 47. **15mm compression copper only - for ½" iron pipe, an additional female adaptor is required.

LST TRV kits

Description	Colour (Top)	Order Code	Minimum Order Qty
Direct Fit Kit (½" Copper or ½" BSP) IRELAND Chrome*	White	LSTDIRECTKITIE	1
Direct Fit Kit (15mm Copper or ½" BSP) UK Chrome	White	LSTDIRECTKITUK	1
Universal Close Coupled Kit (½" Copper) IRELAND Chrome*	White	LSTUNIKITIE	1
Universal Close Coupled Kit (15mm Copper) UK Chrome	White	LSTUNIKITUK	1
Close Coupled Kit (½" Copper) IRELAND Chrome*	White	LSTCCKITIE	1
Close Coupled Kit (15mm Copper) UK Chrome	White	LSTCCKITUK	1

LST TRV kit accessories

Capillary Assembly - 2m	-	LSTCAP2	1
TRV Head Locating Body Chrome	White	LSTTRVHLB	1

*ROI only.



REMOTE THERMOSTATS


The MYSON remote sensor incorporates a traditional TRV head which can be set to the desired temperature.




The room temperature is monitored via a 2, or 5 metre capillary connected to the sensing element which can be mounted in a convenient and temperature representative area of the room. Remote sensor heads are ideal for use when it is difficult for a traditional TRV to operate, such as behind furniture or in direct sunlight, and are primarily used with LST radiators.

Dimensions

Remote Adjuster

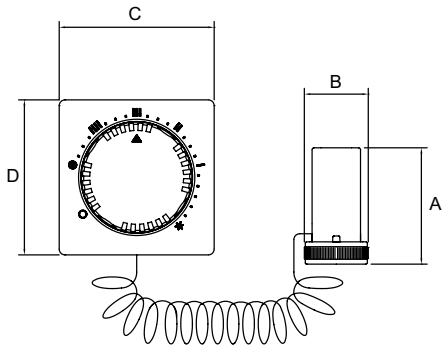

Remote Sensor

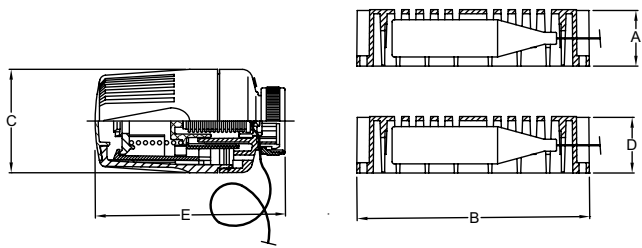

Model	A	B	C	D	E
	(mm)	(mm)	(mm)	(mm)	(mm)
REMOTE ADJUSTER					
2/5m Capillary	53.5	32.5	80.0	80.0	-
REMOTE SENSOR					
2/5m Capillary	28.0	112.0	50.0	28.0	90.0

NB: All measurements are nominal.

General specification

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2008.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- DELIVERY**
2 - 5 working days.

For more general information, please see page 256.



Description	Colour (Top)	Order Code	Minimum Order Qty
Remote Adjustable Head - 2m*	White	REMADJHEAD2	1
Remote Adjustable Head - 5m*	White	REMADJHEAD5	1
Remote Sensor Head - 2m*	White	REMSJENHEAD2	1
Remote Sensor Head - 5m*	White	REMSJENHEAD5	1

*Temporarily unavailable.

HEATING VALVES

AUTOMATIC BYPASS VALVES


MYSON offer a selection of reliable Automatic Bypass Valves (ABVs).



Our automatic bypass valves are designed for use in domestic central heating systems and are available in either an angled or straight version. Its purpose is to maintain constant pump pressure and flow rate within the system. ABVs also reduce system noise and increase efficiency.

General specification

- CERTIFICATION**
Produced under a quality management system - ISO 9001:2008. Pressure tested in accordance with BS 2767.
- OPERATING PRESSURES**
Operating pressure 10 bar.
- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- OPERATING TEMPERATURE**
Operating temperature 120°C.
- DELIVERY**
2 - 5 working days.
- COLOUR**
Finished in nickel.
- CONNECTIONS**
Compression.
- For more general information, please see page 256.

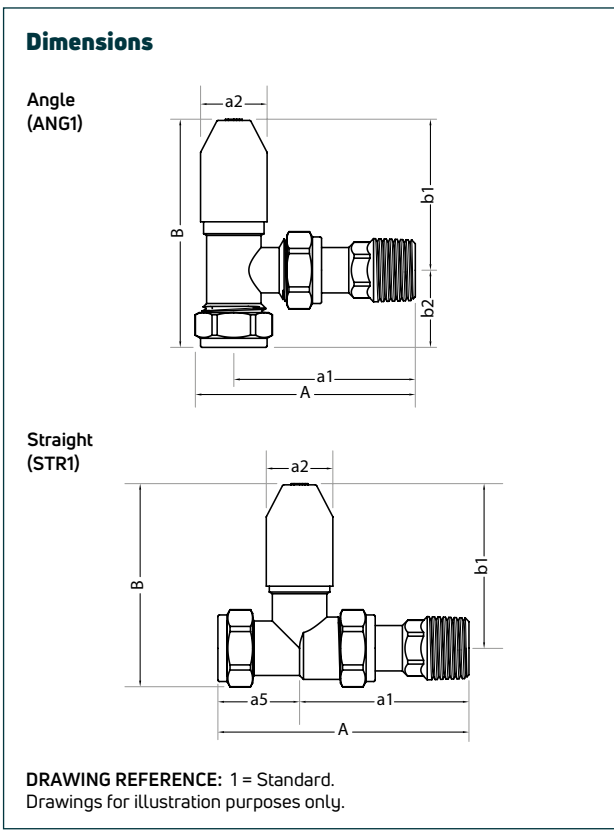

Model	DWG Ref.	A	a1	a2	a5	B	b1	b2
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
Automatic Bypass Valve 22mm Angle	ANG1	53	35	26	-	104	64	40
Automatic Bypass Valve 22mm Straight	STR1	77	39	26	38	94	76	-
Automatic Bypass Valve ¾" Olive Angle	ANG1	53	35	26	-	104	64	40
Automatic Bypass Valve ¾" Olive Straight	STR1	77	39	26	38	94	76	-

NB: All measurements are nominal.

Description	Colour (Top)	Order Code	Minimum Order Qty
Automatic Bypass Valve 22mm Angle	Black	ABV22A	1
Automatic Bypass Valve 22mm Straight	Black	ABV22S	1
Automatic Bypass Valves ¾" Imperial Olive Compression Angle - Republic of Ireland only	Black	ABV3/4A	1
Automatic Bypass Valves ¾" Imperial Olive Compression Straight - Republic of Ireland only	Black	ABV3/4S	1

HEATING VALVES

Accessories

	Description	Colour (Top)	Order Code	Minimum Order Qty
	15mm - 10mm Pushfit Elbow Chrome	-	10MMPF90ELBOW	1
	28mm - 30mm TRV Head Adaptor Chrome	-	TRV22830ADAP	1
	Chrome Drain Off Tail	-	CHRD/OTAIL	1
	Chrome Extension Tail - Standard (43mm)	-	CHREXTTAIL-STD	1
	Chrome Extension Tail - Extended (64mm)	-	CHREXTTAIL-EXT	1
	Chrome Radiator Extension - 20mm	-	CHRRADEXT-20	1
	Chrome Radiator Extension - 30mm	-	CHRRADEXT-30	1
	Chrome Radiator Extension - 40mm	-	CHRRADEXT-40	1
	TRV Commissioning Cap	White	TRVCOMCAP	1




Electronic controls

MYSON offers a full range of quality electronic controls to ensure that you get the most out of our heating products. Our controls are designed by our heating experts to perfectly complement our systems.

Controls are an essential part of every heating system. Today's controls should be easy to understand, operate and straightforward to install. Using the latest technologies, they should provide efficient, effective and precision control to meet the requirements of modern day, energy efficient homes.

MYSON's range of electronic controls offers all of this, from mechanical dial thermostats to WiFi enabled touch controls utilising Smart Start technology, we have a solution for you.

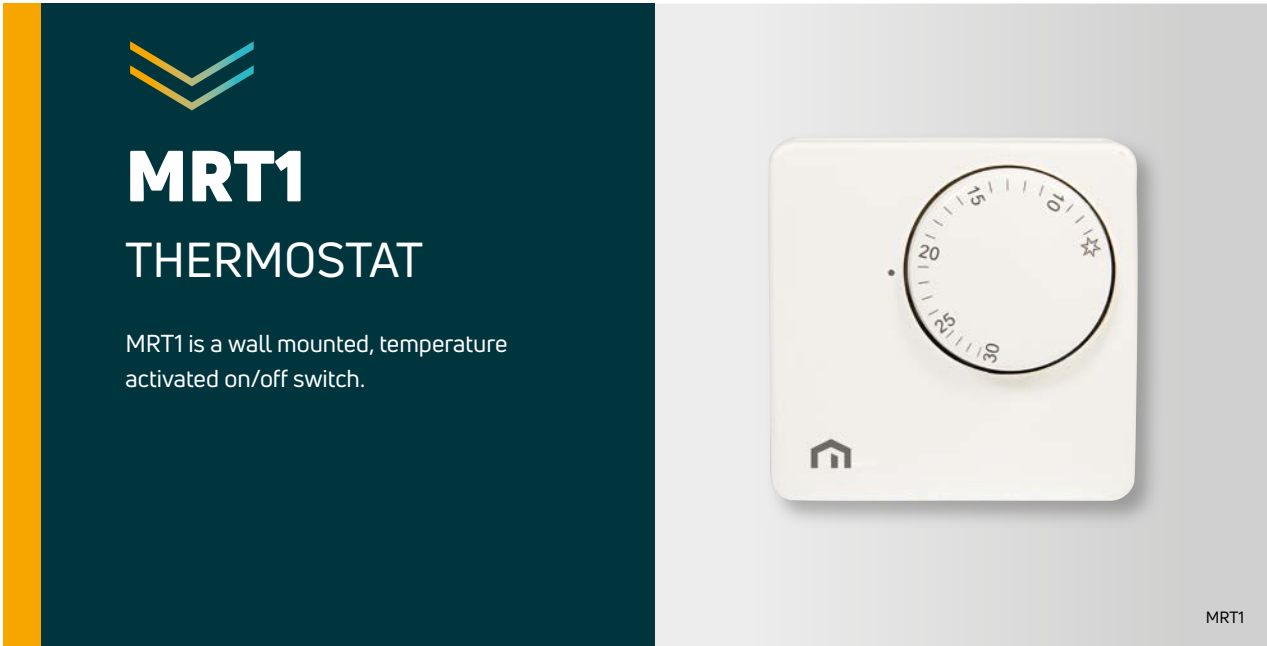

The desired temperature is set on the rotary control dial. The thermostat monitors and compares the actual room temperature with the set temperature on the control.

If the room temperature is below the desired level and the thermostat has requested heat, the central heating system will run the heating circuit until the temperature reaches the required level, the MRT1 will switch off the heating circuit.

Product summary

- Gas bellow with anticipator for better reaction times to temperature change
- Simple and accurate
- Lockable or high/low temperature restrict feature
- Operating range 6 to 30°C
- Switching differential 1.3°C
- Large terminal screws

General specification

- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- IP RATING**
IP20.
- DELIVERY**
2 - 5 working days.

For more general information, please see page 256.



Description	Order Code	Minimum Order Qty
Room Thermostat	MRT1	1



It has a clear, accurate LCD display and limits the maximum and minimum temperature, working as either a heating control or a cooling control. It is battery powered which makes this thermostat ideal for upgrading an old two-wire (no neutral wire) thermostat and has volt free contacts for use with various types of system.

Product summary

- Electronic thermostat
- Slimline design
- Temperature intervals
- Clear, accurate LCD display
- Displays actual temperature
- No neutral, two-wire connection

General specification

- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- IP RATING**
IP20.
- DELIVERY**
2 - 5 working days.

For more general information, please see page 256.



Description	Order Code	Minimum Order Qty
Electronic Room Thermostat	MRTE	1



It is used for monitoring and controlling the temperature of the hot water stored within the hot water cylinder. When used with a thermostatic control for the heating circuit it will give boiler interlock providing a safety feature. It can also be used as a pipe thermostat in conjunction with a frost thermostat to ensure a boiler does not run uncontrolled during cold weather.

Product summary

- Maximum mounting temperature 100°C
- Operating range 10 to 90°C
- Switching differential 5 to 10°C
- Large terminal screws, for easy connection

General specification

- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- IP RATING**
IP20.
- DELIVERY**
2 - 5 working days.

For more general information, please see page 256.



Description	Order Code	Minimum Order Qty
Cylinder Thermostat	MCT1	1
Cylinder Thermostat - Anti-Tamper	MCT1TP	1



It utilises Smart Start technology which can give the user considerable savings on heating bills by varying start-up times. The Smart Start system is continually learning the temperature rise requirement, delaying the start-up of the system, therefore saving energy during milder weather. A radio frequency version is also available.

Product summary

- Uses Smart Start technology
- 24-hour or 7-day programming
- 3 temperature settings - comfort, economy (set back) and frost
- 4 programmes (3 pre-set, 1 adjustable) with manual override
- Clear, accurate LCD display
- Compatible with MYSON FLOORTEC underfloor heating systems and connects to a 24V hard wired wiring centre. One thermostat can control several loops

General specification

- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- IP RATING**
IP30.
- DELIVERY**
2 - 5 working days.
- BOILER PLUS COMPLIANT**

For more general information, please see page 256.



Description	Order Code	Minimum Order Qty
Programmable Room Thermostat	MPRT	1
Programmable Room Thermostat, Mains Supply	MPRTMS	1
Wireless Programmable Room Thermostat and Receiver	MPRTRF	1
RF Relay for use with the MPRTRF	RELAY433	1



TOUCH

PROGRAMMABLE ROOM THERMOSTAT

The MYSON TOUCH range of touch screen programmable thermostats allow you to set different room temperatures for the morning, day, evening and night time.



TOUCH



TOUCH2 WiFi

PROGRAMMABLE ROOM THERMOSTAT

TOUCH2 WiFi is the second-generation WiFi thermostat from MYSON and allows you to control your heating from anywhere in the world.



TOUCH2 WiFi


The Smart Start function will save both energy and money by delaying the heating start up time when the weather is warmer.


The range includes the MYSON TOUCH and MYSON TOUCH RS, which comes with a remote sensor. The TOUCH RS is primarily designed for underfloor systems which senses floor temperature.


Product summary

- Smart Start technology
- Clear, easy to use touch screen display
- 24-hour, 5/2 day or 7-day programming
- Up to 4 time and temperature settings per day
- 230V supply
- MYSON TOUCH is suitable to be classified as a “Delayed Start” thermostat as defined in SAP 2005
- MYSON TOUCH RS, primarily designed for underfloor systems, includes a remote sensor which senses either floor or room temperature or a combination of both
- Load Compensation technology (saves fuel by delaying heating ‘start-up’ on warm days)
- 2 zone programmable room thermostat

General specification

- 

GUARANTEE
2 year guarantee from date of purchase against manufacturing defects.
- 

IP RATING
IP20.
- 

DELIVERY
2 - 5 working days.

For more general information, please see page 256.



Description	Order Code	Minimum Order Qty
TOUCH Screen Programmable Room Thermostat	TOUCH	1
TOUCH Screen Programmable Room Thermostat with Remote Sensor	TOUCHRS	1


It is easy to set up and configure on your smart phone or tablet and is controlled using the TOUCH2 app. The Smart Start function will save both energy and money by delaying the heating start up time when the weather is warmer. The Geo Location feature will support multi-user smart phone to deactivate and reactivate when leaving and returning home.


Product summary


- Apple HomeKit enabled
- Geo Location
- Smart Start technology
- Thimble air and floor sensor options
- 24-hour, 5/2 day or 7-day programming
- Up to 4 time and temperature period settings per day
- Can be set for time only (to control hot water cylinder)
- Temperature over-ride, temperature hold and holiday functions
- Lockable, with PIN code
- View live temperature from your home on your smart phone via the MYSON TOUCH2 app
- Uses mesh communication for multi-zone control


- Compact size - 85mm x 85mm x 15mm and requires a minimum electrical box depth of 25mm
- Hub can control up to 32 thermostats
- 1 zone programmable room thermostat

General specification

- 

GUARANTEE
2 year guarantee from date of purchase against manufacturing defects.
- 

IP RATING
IP20.
- 


DELIVERY
2 - 5 working days.
- 

BOILER PLUS COMPLIANT
When connected to TOUCH2 Hub.

For more general information, please see page 256.



Description	Order Code	Minimum Order Qty
TOUCH2 WiFi Touch Pad Programmable Room Thermostat for 'Smart Phone' Control & Control Hub	T2AHWIFI	1
TOUCH2 WiFi Touch Pad Programmable Room Thermostat for 'Smart Phone' Control	T2WIFI	1
TOUCH2 WiFi Hub Only	T2HUB	1
WiFi Air Sensor including Thimble Cover (2 metre cable)	TAIRSEN	1
WiFi Floor Sensor (3 metre cable)	TFLRSEN	1

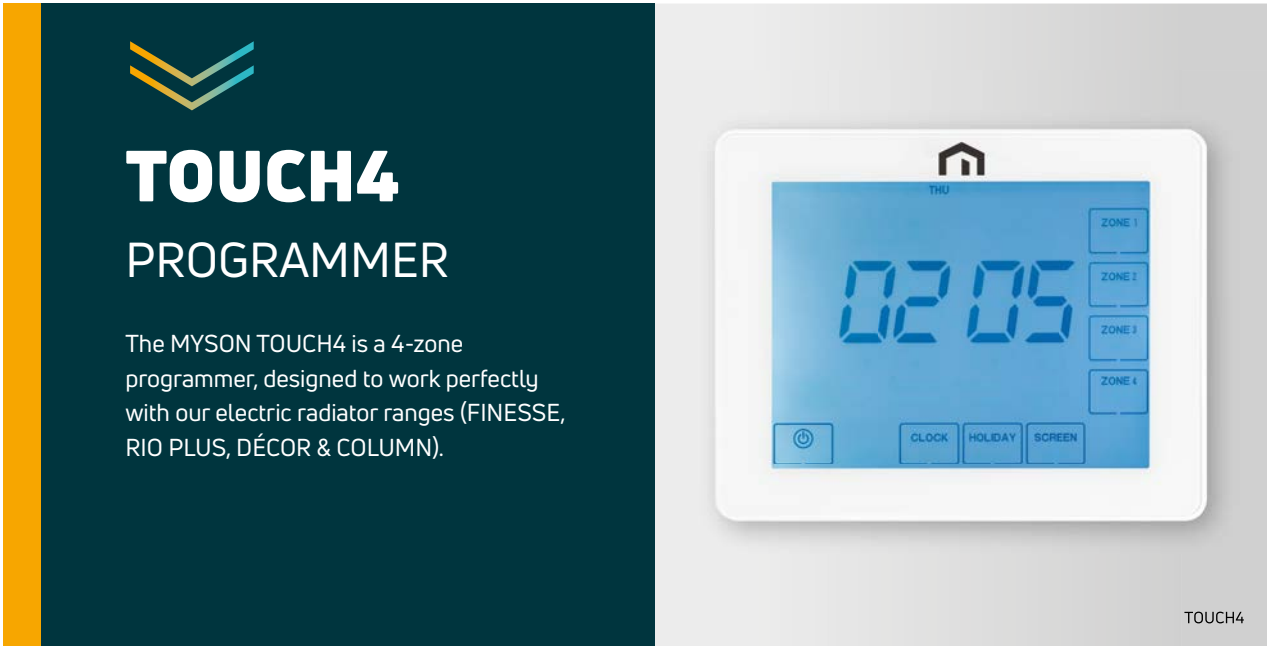

The TOUCH4 is unique with its precision touch screen interface and easy to use functions.

Product summary


- For use with our electric radiators only
- Up to 4 zones
- Each zone can be set to work in 5/2 or 7-day mode
- 4 switching times per day
- Holiday facility
- Boost facility
- Copy facility
- Mode select (Auto, Constant, Off)

General specification

- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- IP RATING**
IP20.
- DELIVERY**
2 - 5 working days.

For more general information, please see page 256.

Description	Order Code	Minimum Order Qty
Touch Screen 4 Zone Programmer	TOUCH4	1

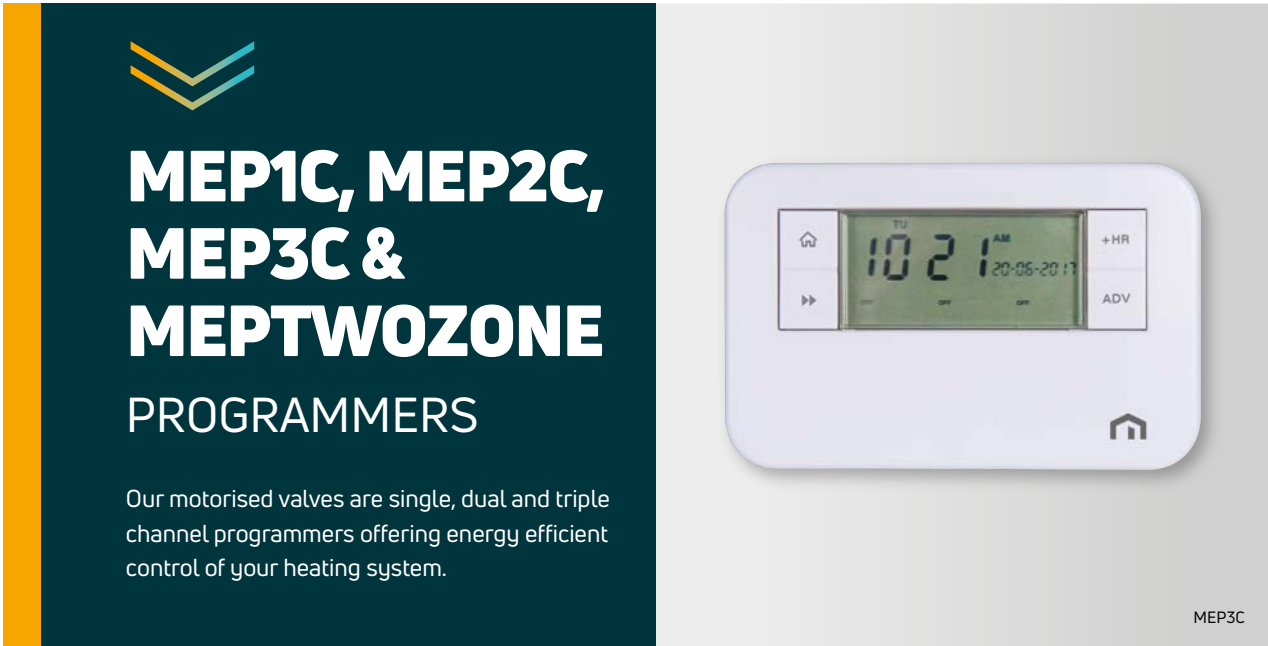

MEP1c is a single channel programmer for use with combi boilers, as a domestic hot water control or with electric radiators when using a programmable thermostat for the central heating circuit.

MEP2c is a dual channel programmer for use with a central heating system and a domestic hot water control.

MEP3c is a three-channel programmer, designed for installations where there is a need for two heating zones and a hot water circuit.

MEPTWOZONE is a dual channel programmer for use within a central heating system to control two heating zones

Product summary

- Easy to use
- Can be set for 24-hour, 5/2 day or 7-day operation
- Easy to read, backlit screen
- Pre-set clock
- Automatic summer/winter time change
- Memory saver - programmer and clock will not require resetting in the event of power loss
- Advanced and extend features for even more control

General specification

- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- IP RATING**
IP20.
- DELIVERY**
2 - 5 working days.

For more general information, please see page 256.

Description	Order Code	Minimum Order Qty
1 Channel Programmer	MEP1C	1
2 Channel Programmer - 1 x Hot Water & 1 x Central Heating	MEP2C	1
3 Channel Programmer - 1 x Hot Water & 2 x Central Heating	MEP3C	1
2 Channel Programmer - 2 x Central Heating	MEPTWOZONE	1



MOTORISED VALVES & ACCESSORIES

Motorised valves control the flow of water between heating and hot water zones in domestic fully pumped central heating systems.



The MYSON range of motorised valves has been designed with complete reliability and compatibility in mind. Our motorised valves are compatible as replacements to all leading makes, so you don't need to look anywhere else.

The range has low contact resistance switching for compatibility with the low voltage/low current switching found on many boilers throughout the UK and Europe.

Product summary

- Powerful motor with high grade (Class F) insulation
- Neon valve position indicators
- Gold plated microswitch contacts
- Mica filled PTFE shoes
- Manual override with spring return
- Compatible as replacement to all leading makes
- ISO 9002 Quality Assurance
- Two port valves to control either central heating or hot water circuit
- Three port mid position valves control central heating and hot water circuits simultaneously


General specification

- GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- DELIVERY**
2 - 5 working days.


For more general information, please see page 256.



2 port valve system diagram

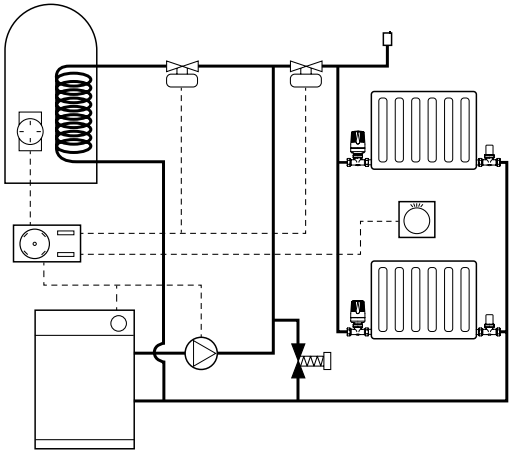

3 port valve system diagram

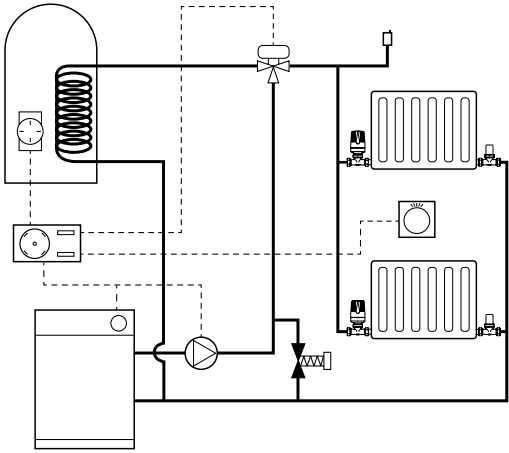

Motorised valves

Description	Order Code	Minimum Order Qty
Two Port Motorised Zone Valve 1" Imperial Olive Compression - Republic of Ireland only	MPE21	1
Two Port Motorised Zone Valve - 22mm	MPE222	1
Two Port Motorised Zone Valve - 28mm	MPE228	1
Two Port Motorised Zone Valve ¾" Imperial Olive Compression - Republic of Ireland only	MPE23/4	1
Three Port Motorised Divertor Valve - 22mm	MPE322DV	1
Three Port Motorised Zone Valve ¾" Imperial Olive Compression - Republic of Ireland only	MPE33/4DV	1
Three Port Motorised Zone Mid Position Valve 1" Imperial Olive Compression - Republic of Ireland only	MPE31	1
Three Port Motorised Mid Position Valve - 22mm	MPE322	1
Three Port Motorised Mid Position Valve - 28mm	MPE328	1
Three Port Motorised Zone Mid Position Valve ¾" Imperial Olive Compression - Republic of Ireland only	MPE33/4	1

Motorised valve accessories

Two Port Actuator Head Only (For MPE222, MPE23/4)	ACT222	1
Two Port Actuator Head Only (For MPE228, MPE21)	ACT228	1
Three Port Actuator Head (For MPE322, MPE328, MPE33/4, MPE31)	ACT322	1



CONTROL PACKS



MYSON produce a range of control packs, with all the system controls you need in one handy box. They are designed to help installers and specifiers and come with easy-to-follow wiring instructions.



The attractive control packs are designed to give you exactly the right combination of controls to make your central heating system work more efficiently. All the products in each system pack have been developed to be attractive yet unobtrusive and each will complement your home. Correctly installed, the MYSON control system will allow you more effective and economical control of your heating and hot water.

The packs suit all standard types of heating systems and will meet most requirements, from fully pumped flow share and zoned systems to unvented hot water storage systems.

General specification

- **GUARANTEE**
2 year guarantee from date of purchase against manufacturing defects.
- **DELIVERY**
2 - 5 working days.

For more general information, please see page 256.

MCPACK1

MYSON CONTROL PACK 1 contains
MEP2C, MPE322, MCT1, MRT1, MWB16

MCPACK2

MYSON CONTROL PACK 2 contains
MEP2C, MPE222 X 2, MCT1, MRT1, MWB16

Control packs

Description	Order Code	Minimum Order Qty
MYSON Control pack 1 contains - MEP2C, MPE322, MCT1, MRT1, MWB16	MCPACK1	1
MYSON Control pack 2 contains - MEP2C, MPE222 X 2, MCT1, MRT1, MWB16	MCPACK2	1
MYSON Control pack 3 contains - MEP2C, MPE228, MPE222, MCT1, MRT1, MWB16	MCPACK3	1
MYSON Control pack 4 contains - MEP2C, MPE222, MRT1, MWB16	MCPACK4	1
MYSON Control pack 5 contains - MEP2C, MPE228, MRT1, MWB16	MCPACK5	1
MYSON Control pack 6 contains - MEP3C, MPE222 X 2, MRT1 X 2, MWB16	MCPACK6	1
MYSON Control pack 9 contains - MEPTWOZONE, MPE222 X 2, MRT1 X 2, MWB16	MCPACK9	1
MYSON Control pack 11 contains - MEP3C, MPE222 X 3, MCT1, MRT1 X 2, MWB16	MCPACK11	1
MYSON Control pack 12 contains - MEP3C, MPE222 X 3, MCT1TP, MRT1 X 2, MWB16	MCPACK12	1
MYSON Control pack 14 contains - MEP2C, MPE222 X 2, MCT1TP, MRT1, MWB16	MCPACK14	1

Wiring box

16 Terminal Wiring Box	MWB16	1
------------------------	-------	---

MCPACK3



MYSON CONTROL PACK 3 contains
MEP2C, MPE228, MPE222, MCT1, MRT1, MWB16

MCPACK4



MYSON CONTROL PACK 4 contains
MEP2C, MPE222, MRT1, MWB16

MCPACK5



MYSON CONTROL PACK 5 contains
MEP2C, MPE228, MRT1, MWB16

MCPACK6



MYSON CONTROL PACK 6 contains
MEP3C, MPE222 X 2, MRT1 X 2, MWB16

MCPACK9



MYSON CONTROL PACK 9 contains
MEPTWOZONE, MPE222 X 2, MRT1 X 2, MWB16

MCPACK11



MYSON CONTROL PACK 11 contains
MEP3C, MPE222 X 3, MCT1, MRT1 X 2, MWB16

MCPACK12



MYSON CONTROL PACK 12 contains
MEP3C, MPE222 X 3, MCT1TP, MRT1 X 2, MWB16

MCPACK14



MYSON CONTROL PACK 14 contains
MEP2C, MPE222 X 2, MCT1TP, MRT1, MWB16

Please note: Product styles in the Control Packs may change, however, the function will still be the same.

GENERAL INFORMATION

UKCA & CE MARKING

All MYSON products have been assessed against UK and EU Directives, Regulations and standards and carry the CE mark and the UKCA mark where applicable.

PACKAGING

All MYSON products are packed in robust packaging specially designed to ensure that the product reaches you in perfect condition.

INHIBITORS

All products installed onto indirect hydronic systems must be cleaned and protected (includes the use of an inhibitor) in accordance with the Domestic Building Services Compliance Guide and to the British Standard Code of Practice for Water Treatment. Failure to meet the regulations under BS7593 compliance will invalidate the product warranty.

SAFETY PRECAUTIONS

Radiators are hot when in use, and as such, present a risk of burns to users on prolonged contact. The temperature of a radiator is dependent on the temperature of the system water, as set by the system installer or user. Installers and users should ensure that those who may come into close proximity to hot radiators are aware of the risk of burns. Installers and users should take all necessary steps to minimise the risks of burns.

If the risk is significant, consideration should be given to installing low surface temperature radiators, or to placing guards in front of the radiators.

FIXINGS

For the correct installation of radiators it is essential that the fixing of the radiator is carried out in such a way that it is suitable for intended use AND predictable misuse. A number of elements need to be taken into consideration including the fixing method used to secure the radiator to the wall, the type and condition of the wall itself, and any

additional potential forces or weights that may happen to be applied to the radiator, prior to finalising installation. IN ALL CASES IT IS STRONGLY RECOMMENDED THAT A SUITABLY QUALIFIED PROFESSIONAL INSTALLER OR SIMILAR TRADESPERSON CARRIES OUT THE INSTALLATION.

PLEASE NOTE: The fixing materials provided are only intended for installation on walls made of solid wood, bricks, concrete or on timber-frame stud walls where the fixing is into the timber. All walls being considered should have no more than a maximum of 3mm wall finishing. For walls made of other materials, for example hollow bricks, please consult your installer and/or specialist supplier. ONCE AGAIN, IF YOU ARE UNSURE, IT IS STRONGLY RECOMMENDED THAT A SUITABLY QUALIFIED PROFESSIONAL INSTALLER OR SIMILAR TRADESPERSON CARRIES OUT THE INSTALLATION.

APPLICATION

Most MYSON products are for use on 2 pipe pumped indirect domestic and commercial central heating installations, with a maximum working temperature of 100°C. The system should be designed in accordance with BS EN 12828:2003 or BS EN 12831:2003 as appropriate, with particular care taken to avoid air entry or water discharge.

We do not recommend the use of single feed indirect cylinders, as the possibility of aeration due to water interchange may lead to corrosion. The installation work must be carried out in accordance with recognised good practice, and precautions taken to avoid contamination which could lead to corrosion. If a corrosion inhibitor or other water treatment is to be used, the Manufacturer's Instructions must be strictly followed.

The recommendations of BS 7593, Code of Practice for treatment of water in domestic hot water central heating systems, should be followed where appropriate.

When fitting any heat emitter in an extremely high humidity environment (for example a swimming pool area or sports changing facility) products manufactured from steel should be avoided.




CERTIFICATION FOR NPD PRODUCTS

Products highlighted 'No Performance Declared' (NPD) have heat outputs below the measureable limits of EN 442 test methods and calculated outputs are therefore shown.



DEZINCIFICATION

In certain areas, the local water can gradually remove zinc from brass alloys. This process is called dezincification and, on rare occasions and over time, can affect the integrity of a brass product.

All MYSON brass products are manufactured using dezincification resistant brass. This, however, does not entirely eliminate the possibility of dezincification occurring. These products can be used on any hot water central heating system and are identified within the brochure using the  symbol. MYSON insist that you ask your heating engineer/installer if this problem applies to your area, as MYSON can not be held responsible for any resulting damage.




ELECTRICAL INSTALLATION

All electrical models must be hard wired and installed in the correct orientation by a qualified electrician, in accordance with the IEE wiring regulations BS 7671.



IP RATINGS

IP ratings are shown for all electrical products. This must be considered when installing in a location containing a bath or shower, as defined by BS 7671.

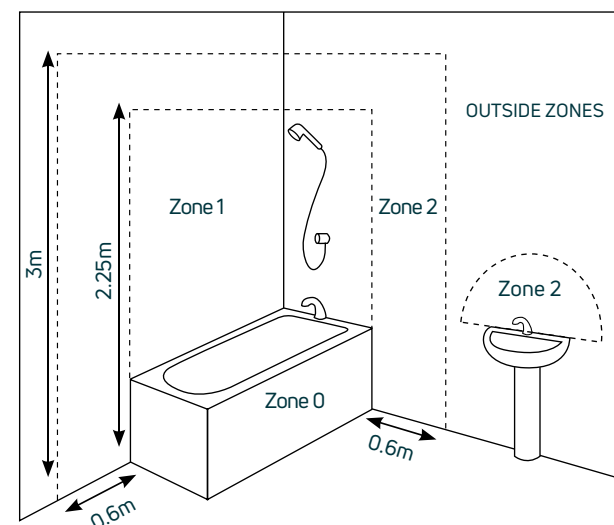

Suitable Zones.



WASTE DISPOSAL ACCORDING TO THE WEEE DIRECTIVE (2012/19/EU)



Waste disposal according to the WEEE Directive (2012/19/EU). The symbol on the product label indicates that the product may not be handled as domestic waste, but must be sorted separately.

When it reaches the end of its useful life, it shall be returned to a collection facility for electrical and electronic products.

By returning the product, you will help to prevent possible negative effects on the environment and health to which the product can contribute if it is disposed of as ordinary domestic waste. For information about recycling and collection facilities, you should contact your local authority/municipality or refuse collection service or the business from which you purchased the product. Applicable to countries where this Directive has been adopted.



DUAL FUEL

This allows a hydronic product to be used if the central heating system is not active. The pipe centres featured in this brochure are based on hydronic products. When adding heater kits to multi-rails, a T-piece and element will be required that alters the pipe centre dimensions (see diagram). The difference in pipe centres featured are based on using MYSON valves. These differences may vary on other manufacturers' valves. For the most efficient operation, one valve should be open and one valve should be closed. Avoid closing both valves.



AUTO POWER MANAGEMENT SYSTEM (APM®)

APM® represents the most advanced element technology available. It is an economical, self-regulating element. When it reaches the required temperature, it reduces power consumption accordingly. There is no need for a thermostat. The required temperature is achieved smoothly and stays constant. APM® is now fitted to all PTC and MHK heating elements and most MYSON electric units where stated.



Dual fuel heater kits pipe centre adjustment.

Certificates & accreditations



Colour options

The majority of products featured in this brochure are stocked in white (RAL 9016). Other colours are available on request (see below and right). Please refer to individual product pages as not all products can be ordered in other RAL, sanitary or special colours.






STANDARD RAL COLOURS

MYSON offers the following RAL colours. If the colour you require is not included in this colour chart, please contact our customer services for availability. Standard RAL colours are 70% gloss.

	Traffic White RAL 9016		Traffic Blue RAL 5017		Red Violet RAL 4002		Light Grey RAL 7035
	Pure White RAL 9010		Night Blue RAL 5022		Purple Violet RAL 4007		Window Grey RAL 7040
	Cream RAL 9001		Ultramarine Blue RAL 5002		Signal Violet RAL 4008		Silver Grey RAL 7001
	Traffic Yellow RAL 1023		Green Blue RAL 5001		Pastel Violet RAL 4009		Dusty Grey RAL 7037
	Lemon Yellow RAL 1012		Jet Black RAL 9005		Light Pink RAL 3015		Stone Grey RAL 7030
	Golden Yellow RAL 1004		Black Grey RAL 7021		Antique Pink RAL 3014		Brown Grey RAL 7013
	Curry Yellow RAL 1027		Dahlia Yellow RAL 1033		Pastel Green RAL 6019		Slate Grey RAL 7015
	Pastel Turquoise RAL 6034		Pastel Orange RAL 2003		Mint Turquoise RAL 6033		Anthracite Grey RAL 7016
	Pigeon Blue RAL 5014		Pure Orange RAL 2004		Blue Green RAL 6004		Graphite Grey RAL 7024
	Azure Blue RAL 5009		Flame Red RAL 3000		Chocolate Brown RAL 8017		White Aluminium RAL 9006
	Sky Blue RAL 5015		Wine Red RAL 3005		Grey Brown RAL 8019		Grey Aluminium RAL 9007

SANITARY COLOURS

MYSON offers the following sanitary colours. If the colour you require is not included in this colour chart, please contact our customer services for availability. Sanitary colours are 50% gloss.



	Jasmine S0075		Pergamon S0091		Natural S0094		Bahama Beige S0087
	Manhattan S0088						



SPECIAL COLOURS

MYSON also offers the following textured, metallic and shimmer metallic colours.




TEXTURED

	Black Textured S0141		White Textured S0142
---	-------------------------	---	-------------------------

METALLIC

	Cream White S0145		Light Grey S0143		Brown Grey S0144		Anodic Natural S0149
	Anodic Bronze S0146		Anodic Brown S0147		Anodic Black S0148		

SHIMMER METALLIC

	Metal Alu S0201		Metal Black S0104		Metal Grey S0102
---	--------------------	---	----------------------	---	---------------------

All our non-stocked and special colour items are made to order, refer to individual product pages for lead times. Should an order be cancelled after it has been placed with the factory an administration fee of 30% of the product value may be applied.

Please note: due to print restrictions exact colour match is not always possible, however every effort has been made to ensure as much accuracy as possible.

Heat output calculation

All heat outputs listed in this brochure are quoted at ΔT30, for low temperature systems, and ΔT50. To calculate outputs at alternative ΔT, please use the following steps:

Symbols used:

- t₁ = Flow temperature
- t₂ = Return temperature
- t_r = Ambient air temperature
- ΔT = Delta T
- Φ = Heat output

ΔT₅₀ = Temperature difference between water and air

EG:

$$\Delta T = \left(\frac{t_1 + t_2}{2} \right) - t_r$$

t₁ = 75°C, t₂ = 65°C, t_r = 20°C

Therefore:

$$\Delta T = \left(\frac{75 + 65}{2} \right) - 20$$

ΔT = 50 (shown as ΔT₅₀)

ΔT_x = If other conditions are used then a new ΔT needs to be determined:

EG:

For the condition 80/70/18

$$\Delta T_x = \left(\frac{t_1 + t_2}{2} \right) - t_r$$

t₁ = 80°C, t₂ = 70°C, t_r = 18°C

Therefore:

$$\Delta T_x = \left(\frac{80 + 70}{2} \right) - 18$$

ΔT_x = 57 (shown as ΔT₅₇)

Φ_{ΔT50} = Heat output at ΔT₅₀ or the condition 75/65/20

EG:

A MYSON PLAN COMPACT 60 PD 100G (600x1000 T22) gives 1676W @ ΔT₅₀

Φ_{ΔTX} = Heat output at an alternative ΔT or condition to ΔT₅₀ or 75/65/18

EG:

For ΔT₅₇ or the condition 80/70/18 (see example above)

$$\Phi_{\Delta TX} = \Phi_{\Delta T50} \times \left(\frac{\Delta T_x}{\Delta T_{50}} \right)^n$$

Φ_{ΔTX} = Φ_{ΔT57}, Φ_{ΔT50} = 1676W, ΔT_x = ΔT₅₇ = 57, ΔT₅₀ = 50, n = 1.3295 (see individual product pages for n-coefficients)

Therefore:

$$\Phi_{\Delta TX} = 1676 \times \left(\frac{57}{50} \right)^{1.3295}$$

Φ_{ΔT57} = 1994W

Product warranty

Thank you for purchasing a Purmo Group (UK) Ltd (Purmo Group) product. Your Purmo Group product has been designed and tested to give you many years of trouble-free service. For your additional peace of mind, Purmo Group gives the following Warranty. Your statutory rights are not affected by this Warranty.

Subject as provided below, Purmo Group warrants to the original purchaser at the original installation site that its products will be free from defects in materials and workmanship for the following periods:

- **Panel Radiators:** 10 years from date of purchase.*
- **Radiators (ULOW-E2):** 2 years from date of purchase.
- **Fan Convectors:** 2 years from date of purchase.
- **Radiator Valves:** 2 years from date of purchase.
- **Hydronic Underfloor Heating:** 10 years for the pipe from date of purchase. 2 years on controls and 12 months on the UFH pump from date of purchase.
- **Electric Underfloor Heating:** 10 years from date of purchase (except programmer & sensor).
- **Electrical Radiators:** 2 years from date of purchase.
- **Towel Warmers - Hydronic:** 10 years from date of purchase.
- **Towel Warmers - Electric:** 2 years from date of purchase.
- **Controls:** 2 years from date of purchase.

*Any panel radiator installed in high humidity areas (such as bathrooms etc.) are subjected to a twelve month warranty only.

The original purchaser’s remedy for breach of this Warranty is expressly limited to repair or replacement of any part or parts found to be defective under conditions of normal service and use during the above Warranty period and does not extend to Purmo Group being liable for any incidental, special or consequential damages or losses whatsoever, such as loss of use of the product, inconvenience or lost profits.

This Warranty does not cover any defect, damage or malfunction in the product which is due to: failure to comply in any respect with Purmo Group’s installation, maintenance or operating instructions; faulty storage, handling, installation or repair; mis-use; neglect; accident; abuse; or general wear and tear.

Before this warranty can be activated, the original purchaser will be required to prove, with supporting documentation, the date and place of purchase, as Purmo Group may need to conduct its investigation into the alleged defect. This should be within 28 days of the date when the defect was discovered or ought to have reasonably discovered the defect.

Purmo Group reserves the right to make a reasonable charge for inspecting and testing any product which is subject to a Warranty claim and the rights conferred by the Warranty are conditional upon the payment of such charge. The charge may be made, at Purmo Group’s discretion, either before or after the inspection and testing of the product. In the event that it is established to Purmo Group’s reasonable satisfaction that a valid Warranty claim has been made in respect of the product, then any inspection charge which has been paid will be refunded in full by Purmo Group.

October 2019

Index

PRODUCT	PAGE
ANGARA	130
AUTOMATIC BYPASS VALVES	240
AVONMORE	128
AVONMORE ELECTRIC	210
AWE	118
BUTTERMERE	119
CLIPRAIL	173
CLOSE COUPLED TRV KIT	237
COLUMN	80
COLUMN ACCESSORIES	85
COLUMN ELECTRIC	208
CONTROL PACKS	254
DÉCOR	86
DÉCOR ELECTRIC	206
DECORATIVE (TRV)	226
DECORATIVE SLIMLINE (MANUAL VALVE)	228
DECORATIVE MODERN (MANUAL VALVE)	228
DECORATIVE TRADITIONAL (MANUAL VALVE)	228
DEE	120
DIRECT FIT TRV KIT	237
ELECTRIC UNDERFLOOR HEATING	216
FATALA	106
FERLO	132
FINESSE	200
FLOATING FLOOR	180
FULLFLOW	224
HEATING VALVES ACCESSORIES	241
HI-LINE LV	148
HI-LINE RC	148
HI-LINE SUPER RC	148
INN	122
INNOKO	214
INTERLUDE	107
iVECTOR MKII	156
KASAI	108
KICKSPACE®	142
KICKSPACE® CONTROLS, ACCESSORIES & GRILLES	147
LINDI	134
LO-LINE RC	148
LST (LOW SURFACE TEMPERATURE)	40
LST (LOW SURFACE TEMPERATURE) VERTICAL	40
LST (LOW SURFACE TEMPERATURE) TRV KITS	236
MANIFOLDS (PREMIUM)	188
MARANOA	110
MATCHMASTER	222
MATCHMATE	220
MCT1	246
MEP1C	251
MEP2C	251
MEP3C	251
MEPTWOZONE	251
MERSEY	112
MICROBOARD	181
MICROPLATE	176
MOTORISED VALVES & ACCESSORIES	252
MPRT	247
MRT1	244
MRTE	245
MULTI-LAYER PIPE	185
MYSON PLUS	234

PRODUCT	PAGE
NAKED PREFORMED PLATE	175
OPUS	96
OUSE	113
PETITE (VALVE)	232
PEXCELLENT5 PIPE	184
PLAN	50
PLAN PLUS	50
PLAN PLUS VERTICAL	50
PLAN VERTICAL	50
PLAN VERTICAL & PLAN PLUS VERTICAL ACCESSORIES	58
PLATED	178
PREFORMED PLATE	174
PREMIER COMPACT	14
PREMIER HE	14
PREMIER METRIC	14
PUMP PACK (PREMIUM)	190
REMOTE THERMOSTATS	238
RIO COMPACT PLUS	202
RIO LINEA PLUS	202
RIO PLAN PLUS	202
SAXBY	123
SELECT COMPACT	28
SOKOTO	114
STOUR	115
SUBPLATE	179
T6 COMPACT	60
T6 PLAN	60
T6 COMPACT & T6 PLAN ACCESSORIES	70
TACKER	177
TACKERNAIL	172
TAMAR	212
THIRLMERE	124
TOUCH	248
TOUCH2 WiFi	249
TOUCH4	250
TOWEL WARMERS ACCESSORIES	138
TRV2	230
TYNE	136
ULLSWATER	125
ULOW-E2	72
ULOW-E2 ACCESSORIES	77
UNDERFLOOR HEATING	165
ADAPTORS	189
CONTROLS	186
FIXING SYSTEMS	170
MANIFOLDS (PREMIUM)	188
PIPE	182
PUMP PACK (PREMIUM)	190
SINGLE ROOM PACKS	194
THERMOSTATS & PROGRAMMERS	193
WIRING CENTRES & ACCESSORIES	192
UNIVERSAL CLOSE COUPLED TRV KIT	236
VERTICAL	34
VERTICAL ACCESSORIES	38

In accordance with our policy of continual product improvement we reserve the right to amend the specification of these products or discontinue products without prior notification. We have compiled the content of this literature to the best of our knowledge. Any typographical, clerical or other error or emission in any literature issued by us will be subject to correction without liability being incurred by us. All rights reserved. No part of this document may be reproduced by any means without prior written consent.

Please note: due to print restrictions exact colour match is not always possible, however every effort has been made to ensure as much accuracy as possible.



September 2023 edition

MYSON

Purmo Group (UK) Ltd.
Eastern Avenue
Team Valley
Gateshead
Tyne & Wear
NE11 0PG, UK
T: +44 (0) 330 041 5474
F: +44 (0) 191 491 7568
E: generalenquiries.uk@purmogroup.com
www.myson.co.uk

