Sanifos 1300

Grey water, rain water

The Sanifos 1300 rainwater is a lifting station designed for removing rainwater water, grey water or water that has been treated. It consists of a 1300 litre tank and a steel pump. It can be used for business premises or homes.



DELIVERED AS STANDARD

PERFORMANCE

Total head: 7 m
Max. flow rate: 8 m³/h

DEPENDING ON MODEL

PRODUCT BENEFITS

- Easy installation: pre-mounted hydraulics
- Guide bar for easy maintenance
- Variable incoming water connection
- Self-cleaning sloping tank bottom



• Tank with pre-assembled hydraulics, 2 isolation valves,

2 non-return valves, cable glands, waterproof terminal blocks, 1 tank seal, 1 drilling template.

Sanisub Steel 50 A




OPTIONAL EXTRAS (SEE ACCESSORIES PAGES)

Sanifos 610/1300 extension Barcode: 3308815077826 Product code: 40503






DIMENSIONS

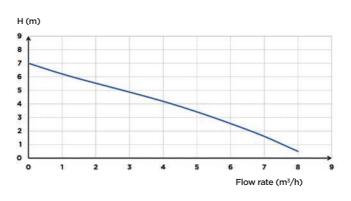

	Sanifos 1300 Steel
Number of pumps	1
Material	
Tank	PE
Pipework	PVC
Electrical features	
See electrical features for pump on page 82	
Hydraulics	
Max. head (m)	7
Max. flow rate (m ³ /h)	8
External inlet diameter (mm)	50, 100
Discharge diameter ext. (mm)	50
Ext. ventilation diameter (mm)	100
Total volume (L)	1300
Useable volume (L)	160
Min. incoming water connection (mm)	600
Max. incoming water connection (mm)	1600
Max. incoming water connection if option is available (mm)	2000
Type of impeller	multi-channel
Type of activation	float
Identification and logistics	
EAN code	3308815085944
Product code	31007

UNDERGROUND STATIONS



CONNECTIONS



External inlet diameter : 50, 100 mm

- External discharge diameter : 50 mm
- External ventilation diameter : 100 mm

Dimensions (mm)