# Sanipuddle

Sanipuddle is a submersible pump with handling capacity down to 1 mm of water, designed to lift clear water or rain water from cellars, laundries, swimming pool floors, spas or lift shafts etc. Sanipuddle can lift water up to 7 m. Non-return valve and power cable included. An electronic level control level is available as an option.



#### **PERFORMANCES**

• Max. head: 7 m

• Max. flow rate: 5.5 m<sup>3</sup>/h


#### PRODUCT BENEFITS

- High-quality polypropylene and stainless steel pump
- Drains down to 1 mm of water
- Double mechanical seal
- Integrated non-return valve


#### PACK CONTAINS

Sanipuddle pump, supply cable (10m), non-return valve

#### **CURVE**

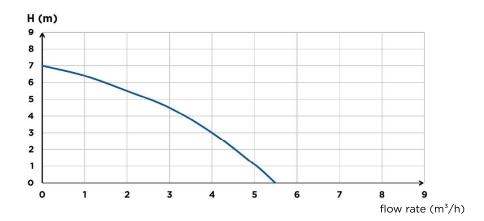

### DIMENSIONS



| TECHNICAL FEATURES                            | Sanipuddle         |
|---|--------------------|
| Material                                      |                    |
| Shaft   | Stainless steel    |
| Pump housing                                  | PP GF              |
| Waterproofing                                 | carbon/ceramic/NBR |
| Motor housing                                 | Stainless steel    |
| Impeller                                      | PA 6 GF            |
| Electrical features                           |                    |
| Voltage (V)                                   | 230                |
| Frequency (Hz)                                | 50-60              |
| Power consumption P1 (W)                      | 300                |
| Power output P2 (W)                           | 160                |
| Revolutions per minute (RPM)                  | 2800               |
| Electrical class                              |                    |
| Immersion depth (m)                           | 5                  |
| Power cable : Length (m)                      | 10                 |
| Hydraulics                                    |                    |
| Max. Head (m)                                 | 7                  |
| Max. flow rate (m³/h)                         | 5.5                |
| Discharge diameter G (inch)                   | 1                  |
| Particle size (mm)                            | 1                  |
| Max. temperature of the pumped liquid (5 min) | 70°C               |
| Type of impeller                              | multi-channel      |
| Type of activation                            | manual             |
| Identification and logistics                  |                    |
| Gross weight (kg)                             | 3.77               |
| EAN code                                      | 3308815081427      |
| Product code                                  | 13187              |

## OPTIONAL EXTRAS

Electronic level control for Sanipuddle



The electronic level controller is used for regulating the level of fluids in tanks or pits when precise control is required or when the level of fluids must be very low. It consists of 4 stainless steel electrodes, an electrode holder, a mounting bracket, a 10 m cable and a plug-in control adapter.

Barcode: 3308815083025 Product code: 11414