

Sanicondens Clim Pack



6 m
↑




PRODUCT BENEFITS

- Complete solution for neat installation
- Easy installation, fixing and connection accessories are included
- Reversible plate for right or left installation

INSTALLATION DIAGRAM

- (A) Condensate tank
- (B) Level sensor
- (C) Pump unit
- (D) Anti-siphoning vacuum breaker
- (E) Waste water pipe




TECHNICAL FEATURES

Max. power of the boiler	8 kW
Inlet diameter DN	16 mm
Discharge diameter DN	6 mm
Max. flow rate	9 L/h +/- 15%
Max. incoming temperature	35°C
Max. suction distance between the detection bloc and the pump	2 m
Voltage / Frequency	220-240 V / 50-60 Hz
Max. power consumption	22 W
IP Rating	IP24
Noise level	21 dB(A)
Identification and logistics	
EAN code	3308815083919
Product code	1132

PACK CONTAINS

Sanicondens Clim pack pump, detection unit, trunking, flexible hose (1.2 m), mounting bracket, vent tube, power cable supplied

CURVE

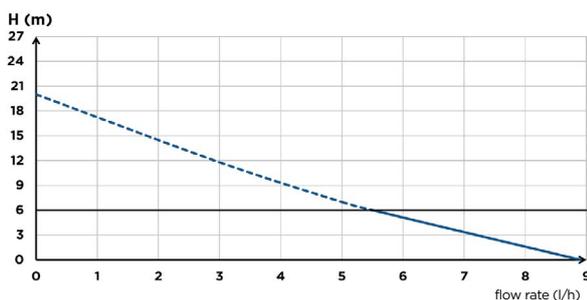

— recommended max height: 6 m

DIMENSIONS

