


S Select Collection

⊘ 04 **♀** 01 **☒** 01

Kielder
Glazed Porcelain
Wall and Floor Tiles





Thickness

All tiles in this range are 10mm thick.

1140 x 200mm



 $\ \ \,$ $\ \ \,$ $\ \ \,$ 04 colours offering a neutral and contemporary palette.



01 finish


Example below is not to scale but has been enlarged to show detail:



 \mathbb{N} Natural

Availability			
Colour	Code	Finish	Size
			40 × 200 × 0mm
Autumn Dawn Evening Glow Frosty Oak Midnight Forest	KIEL I N KIEL 2 N KIEL 3 N KIEL 4 N	N Natural N Natural N Natural N Natural	+ + + + +

All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal.

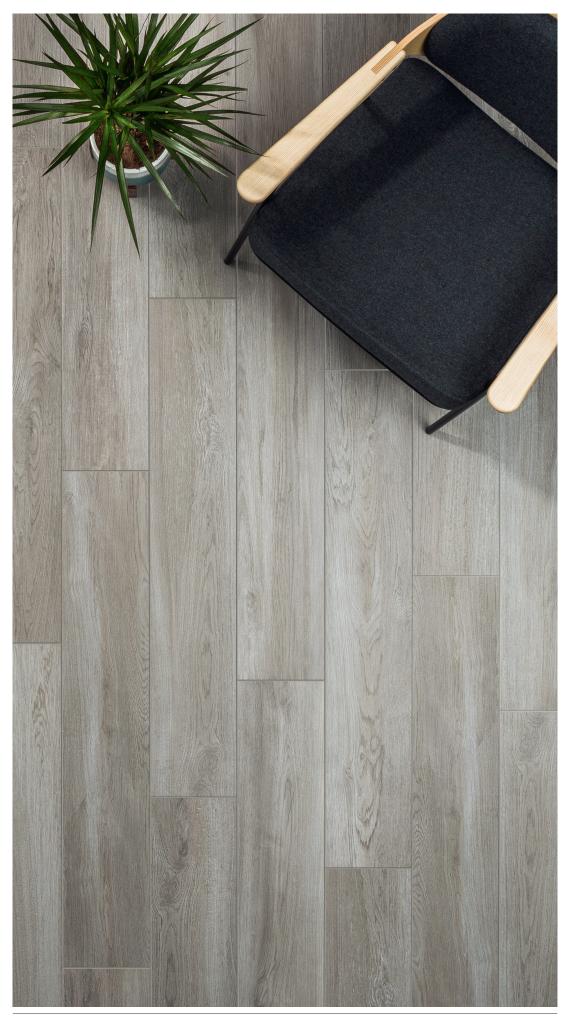

Kielder Frosty Oak

Kielder is a trend-led range that replicates the natural beauty of the forest. Choose from Autumn Dawn, Evening Glow, Frosty Oak or Midnight Forest.

For more details on suitability, or advice on any technical issues, please contact our technical helpline below.

Specification

Size - All sizes

Wall	Floor	Wet barefoot	Material	Finish
Internal and External	Internal	-	Glazed Porcelain	Natural

Floor values

Colour	Pendulum 4S	R value	Shade variation	Wet ramp	Traffic
All colours	Dry 36+ Wet 25 - 35	-	V3	-	Domestic

Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, we suggest you refer to our website or call our technical helpline for the most up-to-date information.

Colour notations

Code	Colour	NCS	LRV	
KIELIN	Autumn Dawn	5010-Y50R	22	
KIEL2N	Evening Glow	4010-Y30R	31	
KIEL3N	Frosty Oak	4005-Y80R	32	
KIEL4N	Midnight Forest	6502-R	15	

Note: These results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value (Reflectance Y).

Front cover image 1: **Kielder Autumn Dawn**Front cover image 2: **Kielder Frosty Oak**

Front cover image 3: Kielder Autumn Dawn, Evening Glow, Frosty Oak and Midnight Forest

Samples

Tel: +44 (0) | 782 524043 Fax: +44 (0) | 782 577379

Email: samples@johnson-tiles.com

Technical helpline

Tel: +44 (0) | 782 524 | | | | Fax: +44 (0) | 782 577379

Email: techadvice@johnson-tiles.com

