

InSite WINDOW SYSTEM

Efficient Offsite Construction



eurocell

CONTENTS

Introduction InSite	3
How It Works	4
Advanced Performance	6
Maximum Energy Efficiency	8
Sustainability	9
Style Options	10
Modus	11
Logik	12
Fully Tested	14



InSite *a revolutionary window system*

Comprising of a specialist hinge, cavity barrier, sealant and a choice of either Eurocells' Logik or Modus window profile. The InSite window system means fully glazed windows can be installed offsite, saving time and money. The future's InSite.

Changing the future of offsite manufacturing

Faster and Easier

The InSite system enables timber frame and light gauge steel manufacturers to install fully glazed, fully finished windows into wall panels as part of the factory production process. This reduces on-site disruption and labour costs while saving time on build programme schedules. The whole panel assembly means the building is wind and watertight on day one, so interior trades can begin work immediately. No waiting for fitters. No worries about scaffolding obstructing window installation. With the windows fitted completely within the panels, this allows transport space to be optimised without the need to pack up between the panels.

Safer too

Site safety and security is the top priority for all responsible contractors. InSite makes working safely on-site easier too, because no working at height is required. Preparing InSite for external cladding and internal boarding can all be done from inside the building, once the window is pushed out into the locked position. Site traffic is reduced because there are no separate window deliveries and no manual handling is required. And no need to store windows on-site means security is improved by reducing risk of theft and damage.



Less disruption on-site



Weathertight on day one



Rigorously tested
& verified



Window U-values
as low as U0.8



Lower on-site
labour costs



Fully tested



BBA
windows



10-year guarantee
for peace of mind*

* 12 years on white Modus profiles

HOW IT WORKS



THE WINDOW SITS INSIDE THE CAVITY, SO THAT WHEN THE PANEL IS CRANED INTO PLACE IT HANGS VERTICALLY. THIS MAKES IT EASIER TO PUT INTO PLACE ON-SITE, RATHER THAN THE WEIGHT CAUSING THE PANEL TO GO IN AT AN ANGLE BECAUSE THE WEIGHT IS PULLING ON ONE SIDE.


Controlled standards

consistent quality every time

InSite windows are fabricated and fitted entirely in factories – so customers receive the same benefits that they offer their clients. The 'Push out' design feature means InSite is especially suited to timber frame and LGS housing.

Because the window sits within the cavity, it can be transported to site from factory. The design enables flat transportation so packers are not required and the windows aren't damaged in transit.


This process ensures that every window is installed to factory process-controlled standards, for consistent quality every time.

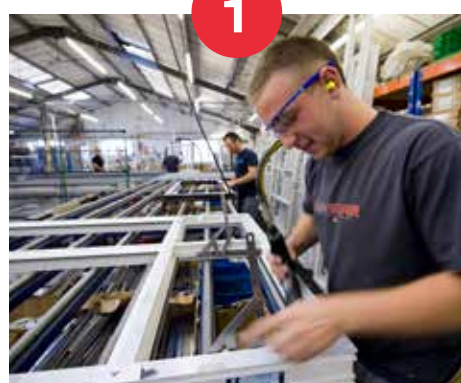

**FABRICATE
WINDOWS FOR
THE INSITE SYSTEM**



**FIT INTO PANELS
IN THE FACTORY**

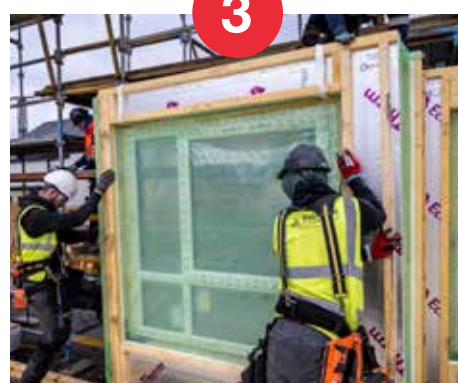

**INSTALL WALL
PANELS ON-SITE**



**LOCK INSITE
INTO POSITION
(PUSH-OUT)**



**CLAD AROUND
THE WINDOW**



**FINISHED
SOLUTION**

ADVANCED
PERFORMANCE

The ingenuity of the InSite wall fixing
engineering is matched by the calibre of
its window design engineering



Assessment report numbers 2480 and 2663

Industry leading

The only window system suitable for timber frame construction that has been fully tested to prevent the spread of fire and smoke from, or to the cavity - making the InSite system a game changer for the industry.

Quality controlled manufacture

Eurocell is unusual amongst PVC-U manufacturers in having in-house toolmaking facilities, as well as its own PVC-U compound mixing plant, affording greater quality control over the production process.

A brighter sight

InSite multi-chambered frames not only perform better than others, but also offer slim sight lines, to increase glass area and create a sleek appearance, so homeowners enjoy lighter, brighter interiors.

Versatility

InSite can be configured to accept both 28mm and 36mm glazing thicknesses, according to the specifications and requirements of your project.

Clip-on cill

A full range of cill sizes are available, all of which neatly and simply clip on to a universal cill connector pre-fitted to the base of the window. Eurocell cills are also made using post-consumer recycled PVC-U.

10-year product guarantee*

The windows used as part of the InSite system carry a 10-year product guarantee from a single source, including fixing assemblies, to provide customer peace of mind. The simplified supply chain also offers full product traceability and centralised documentation.

Safe as houses

The security of their property is a major concern for any homeowner. This is why InSite windows and doors have passed the PAS24 enhanced security test, providing you, your clients and homeowners with peace of mind.

Peace of mind

BBA accreditation (for the windows) means you can specify InSite confident that it will perform at its best and look great for years to come.

The InSite system has been tested by Warrington Fire [part of Exova Group] to .BS 476 Part 20, 1987. This certifies that when all of the approved parts within the system are used together the InSite system prevents the spread of fire and smoke from, or to, the cavity. This is the only system of this type to hold this fire certification.

Meets NHBC guidelines.

* 12 years on white Modus profile

MAXIMUM ENERGY EFFICIENCY

A+ A++

↓ CO₂



High thermal efficiency



Made from recycled materials

Increasing demand for energy efficient windows

Delivering superior energy efficiency has never been more important for the construction industry and homeowners. It's an alarming fact that our homes and buildings are responsible for almost half of the UK's carbon dioxide emissions.

Windows have an important role to play in combating energy wastage, since 20% of the heat escaping from an average home is lost through its windows*.

*Source: Energy Saving Trust.

SUSTAINABILITY

The sustainable option

InSite windows feature post-consumer recycled PVC-U in the centre of the frames. This ensures the same aesthetics and technical performance as the external faces, but combined with environmentally responsible benefits for today's sustainability-conscious construction industry.




We're committed to reducing our impact on the environment

At Eurocell, we're at the forefront of sustainable developments. We recycle around 3 million waste PVC-U frames every year and use recycled or recyclable materials in all of our products. Plus, it's all completed in the UK – reducing CO₂ emissions and cutting down travel miles.



STYLE OPTIONS

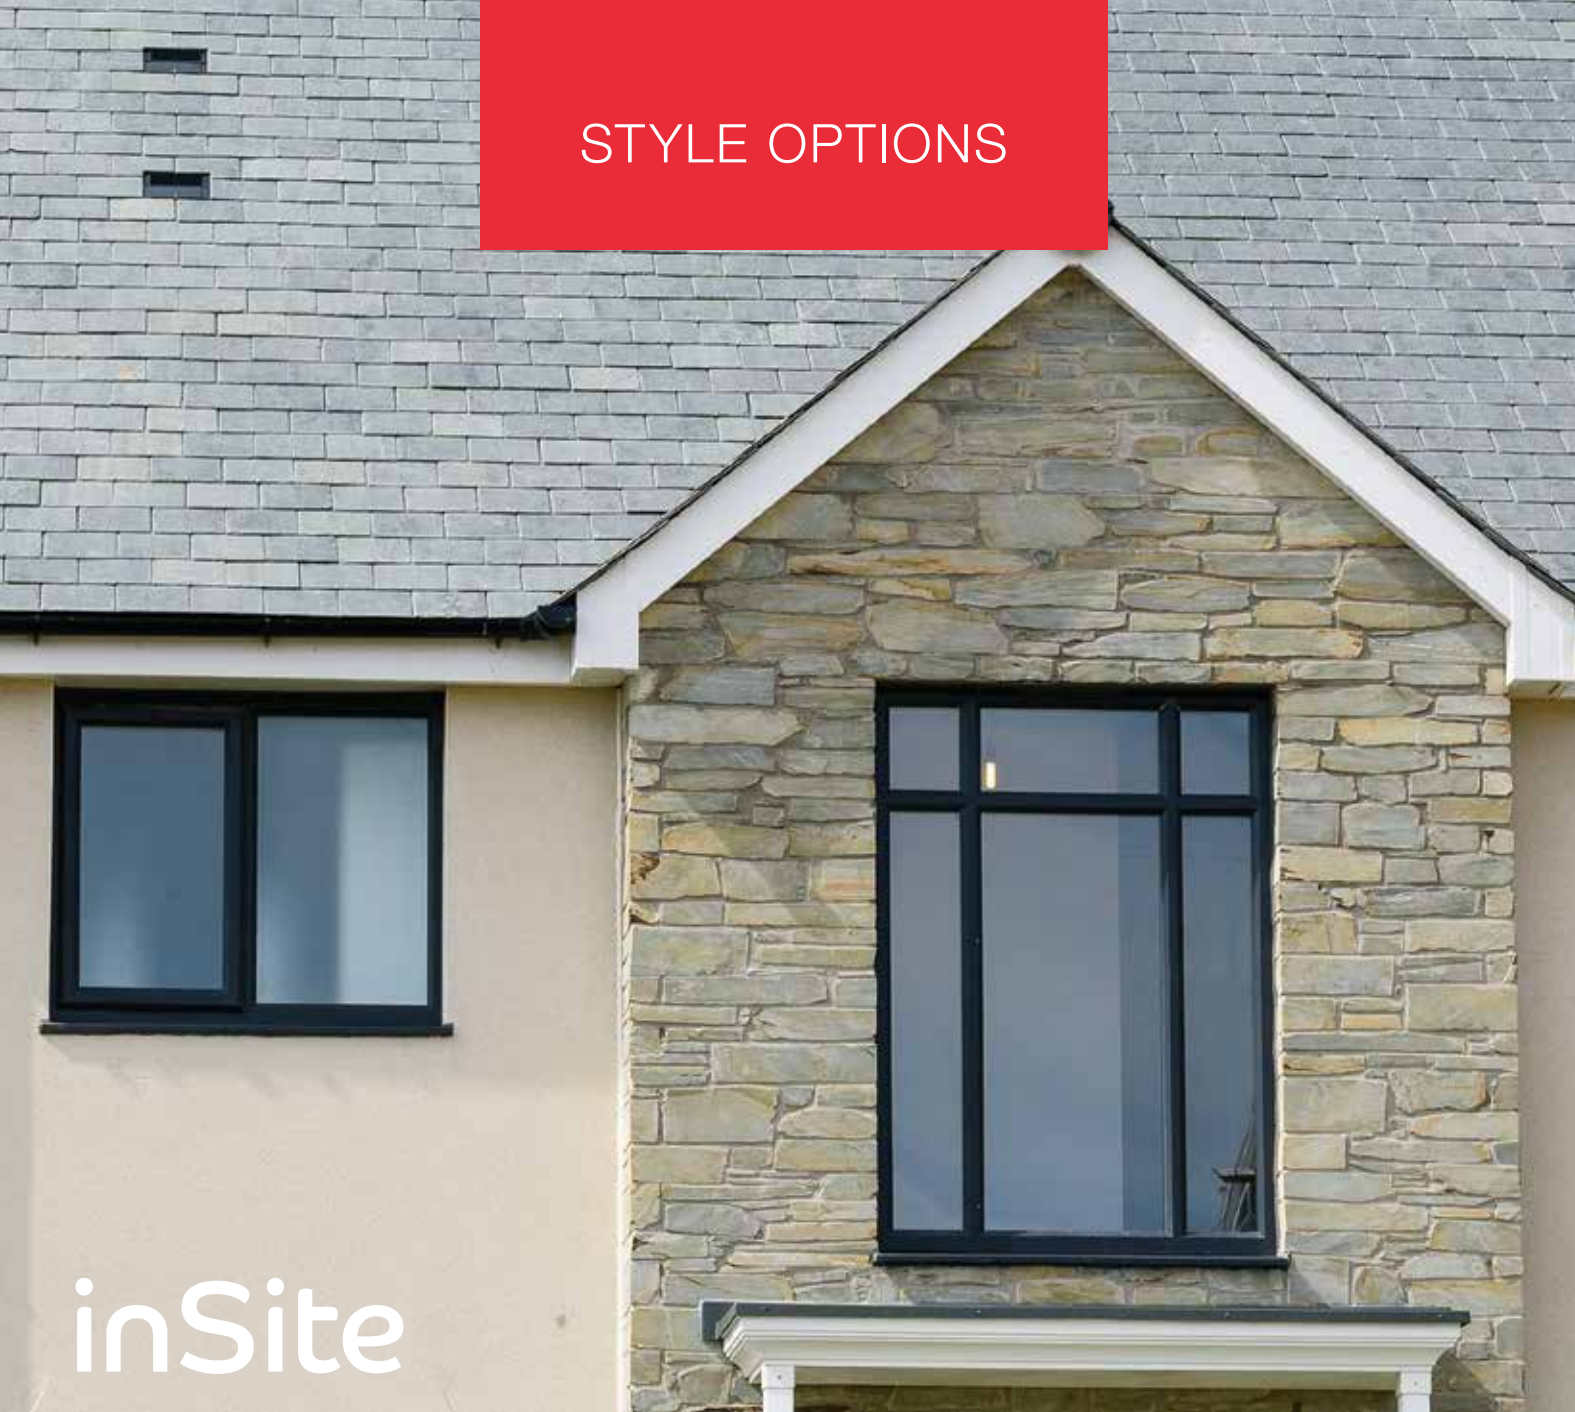

inSite

Create

your own identity

The InSite system is compatible with both Logik and Modus windows for a comprehensive choice of styles to suit any building design, with each system offering interchangeable beads the exterior and interior aesthetics can be completely different if required.

Cream, White Ash or dark woodgrain-effect finishes provide a traditional feel while Grey tones remain a popular choice for creating a contemporary look. Whatever the needs of your projects, InSite has the solution.

MODUS



11
COLOUR
OPTIONS
FROM STOCK

From the Monochrome range



WHITE
Both sides



WHITE ASH
Both sides



MOONDUST GREY
White interior



SLATE GREY WOODGRAIN
White interior



SLATE GREY SMOOTH
White interior



ANTHRACITE GREY WOODGRAIN
White interior



ANTHRACITE GREY SMOOTH
White interior



BLACK ASH
White interior

From the Neutrals range



CREAM
White interior



AGATE GREY
White interior



ANTEAK
White interior

From the Timber range

Modus combines sleek and contemporary style with slimmer sightlines and optimum energy efficiency. A sophisticated alternative to aluminium and timber products.

The fully integrated system offers ultimate flexibility with eight different window and door types from a single system.



*see our colours in
demand brochure*

for additional made to order colour options






LOGIK

15
COLOUR
OPTIONS
FROM STOCK

The Logik system offers three profile styles, traditional ovolo, modern chamfered and contemporary flush, with energy-efficient performance as standard.


Whatever the building style there's a Logik option to suit.

Profile Styles

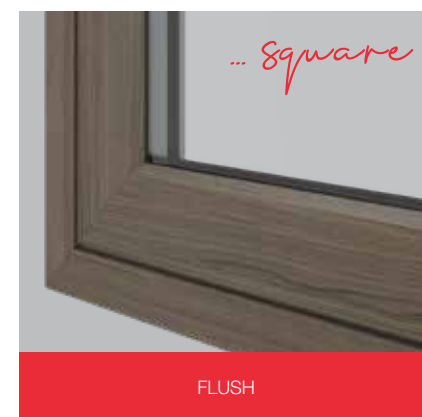

Ovolo

From the Monochrome range

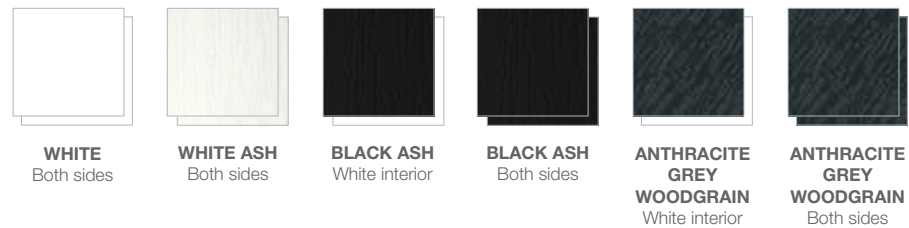

From the Neutrals range



From the Traditional range



From the Timber range



17
COLOUR
OPTIONS
FROM STOCK

Chamfered & Flush

From the Monochrome range



From the Timber range



From the Traditional range



From the Neutrals range



see our colours in
demand brochure
for additional made to order colour options



FULLY TESTED

Peace of mind *included as standard*

InSite windows comply with the relevant Building Regulations and have been thoroughly air, water and wind pressure tested, including resisting wind loads well in excess of 200mph – significantly beyond the highest Category 5 hurricane winds rating (156mph+). The engineering assessment of loadbearing capacity has been made by independent consulting engineers specialising in timber frame construction and according to the current Eurocodes covering loading, structural design and material properties. The hinge bracket design is not currently directly regulated, but references are drawn to the following British Standards:

BS 8213-4:2016

“Code of practice for the survey and installation of windows and external doorsets”

EN ISO 8970:2010

“Timber structures – Testing of joints made with mechanical fasteners – Requirements for wood density”

BS EN 10088-1:2014

“Stainless steels Part 1: List of stainless steels”

BS EN 12210:2016

“Windows and doors — Resistance to wind load — Classification”

BS EN 14358:2006

“Timber structures. Calculation of characteristic 5-percentile values and acceptance criteria for a sample”

BS EN 1990:2002

“Eurocode — Basis of structural design”

BS EN 1993-1-1:2005

“Eurocode 3: Design of steel structures — Part 1-1: General rules and rules for buildings”

BS EN 1993-1-3:2005

“Eurocode 3 — Design of steel structures — Part 1-3: General rules — Supplementary rules for coldformed members and sheeting”

BS EN 1993-1-4:2015

“Eurocode 3 — Design of steel structures — Part 1-4: General rules — Supplementary rules for stainless steels”

BS EN 1993-1-8:2005

“Eurocode 3: Design of steel structures — Part 1-8: Design of joints”

BS EN 1995-1-1:2014

“Eurocode 5: Design of timber structures – Part 1-1: General – Common rules and rules for buildings”

EOTA ETAG 015:2012

“Guideline for European technical approval of Three-Dimensional Nailing Plates”

EOTA TR16: 20002/2012

“Method of testing Three-Dimensional Nailing Plates with examples”

WINDOW SIZES PERMITTABLE

WIDTH: Min 650mm, Max 2300mm

HEIGHT: Min 650mm, Max 2300mm

Variable numbers of fixing bracket hinges are required, depending on the specific window dimensions.





For more information about InSite windows system from Eurocell, call our customer services team:



0800 988 3047



eurocell.co.uk/insite

eurocell.co.uk



**MADE & RECYCLED
IN THE UK**

eurocell