

Zehnder Aura

Hydronic operation

Product data sheet

always the best climate



Large spaces between the tubes and straight lines. Every detail of Zehnder Aura is perfectly designed with modern bathrooms in mind. The decorative radiator for hot water central heating is available in white and with a high-quality chrome finish.


Advantages

- D-profile header tube creates harmonious design
- Ample spaces between tubes make cleaning easy
- Generous spaces between the tubes convenient for hanging towels
- Elegant design in high-quality chrome
- Small radiator depth ideal for narrow bathrooms

Model overview


Special benefits for hot water operation

- Flexible installation through right and left connection options
- Available with Zehnder Vario connection fitting for an unobtrusive and elegantly concealed connection system
- Flexible installation due to 50mm centre connections




Front view

PBN-080-xxx

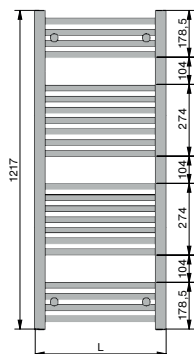


Front view

PBN-120-xxx

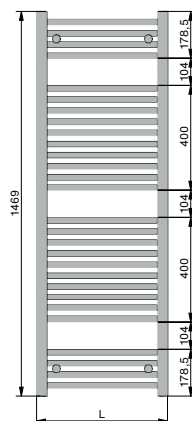

Front view

PBN-150-xxx

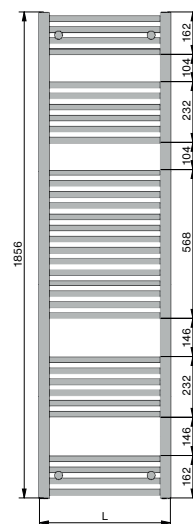

Front view

PBN-180-xxx

Chrome-plated version

Model	H mm	L mm	Heat output			
			75/65/20 °C Watts	70/55/24 °C Watts	55/45/24 °C Watts	55/45/20 °C Watts

Connection from bottom

PBCN-060-040	607	400	150	104	63	79
PBCN-080-040	775	400	186	132	80	97
PBCN-120-040	1217	400	282	192	116	144
PBCN-150-040	1469	400	340	238	144	180
PBCN-180-040	1856	400	432	308	185	222
PBCN-080-050	775	500	230	155	94	119
PBCN-120-050	1217	500	330	229	138	171
PBCN-150-050	1469	500	407	279	169	209
PBCN-180-050	1856	500	513	352	213	265
PBCN-080-060	775	600	271	189	116	145
PBCN-120-060	1217	600	390	273	165	202
PBCN-150-060	1469	600	481	333	201	249
PBCN-180-060	1856	600	607	416	252	313
PBCN-180-075	1856	750	745	523	318	387
PBCN-060-080	607	800	280	197	121	149
PBCN-060-100	607	1000	345	244	151	184

H = height, L = length

75/65/20 = Nominal heat output according to EN 442

Painted version

With 2-point connection left and right

Model	H mm	L mm	Heat output			
			75/65/20 °C Watts	70/55/24 °C Watts	55/45/24 °C Watts	55/45/20 °C Watts
PBN-080-040	775	400	287	208	128	153
PBN-120-040	1217	400	427	310	191	228
PBN-080-050	775	500	358	260	162	194
PBN-120-050	1217	500	512	361	223	272
PBN-150-050	1469	500	631	440	271	335
PBN-180-050	1856	500	788	561	345	418
PBN-080-060	775	600	418	298	187	228
PBN-120-060	1217	600	598	421	260	317
PBN-150-060	1469	600	740	517	319	392
PBN-180-060	1856	600	662	667	407	490

H = height, L = length

75/65/20 = Nominal heat output according to EN 442