

WATCO®

The UK's leading direct supplier of industrial strength flooring products

Interlocking Flooring

The smart, quick and simple solution for damaged and dangerous floors



Watco Interlocking Flooring tiles are the ideal solution for covering damaged floor surfaces, where repair can be impractical and expensive.

Each tile is simply laid on the surface and tapped into place using a rubber mallet. As no glue is required tiles can easily be moved or replaced at little expense.

Watco Interlocking Flooring tiles are manufactured from highly durable 7mm thick PVC to the highest quality standards and are available in 2 styles and 7 colours to meet your requirements. Ideal for weak or contaminated surfaces which cannot be adequately cleaned to receive a coating.

Suitable for floors that:


- Experience high levels of pedestrian or vehicular traffic
- Require regular access to the sub-floor

- Are subject to impact, abrasion or vibration
- Need good anti-slip or anti-fatigue properties
- Are damp, damaged or contaminated

Watco Interlocking Flooring is suitable for commercial applications such as retail outlets, passenger terminals, schools, offices and gyms as well as industrial applications including factories and warehouses.

Benefits:

- Quick and simple to install, no gluing required, simply tap into place with a rubber mallet (see illustration, bottom right)
- Once fitted, the tiles can be lifted, replaced and transported as required
- Environmentally friendly, high recycled PVC content
- Resistant to chemicals, oils and solvents
- Edge ramp also available to reduce trip hazards

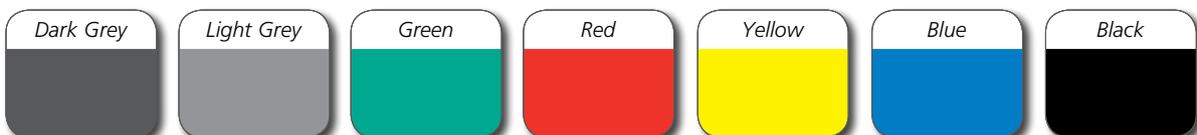


FREE tile samples are available on request

While great care is taken with the colour samples shown, no guarantee can be given that they represent exactly the colours offered

Watco Interlocking Flooring

7mm thick tiles available in seven colours with either a flat design or raised disc

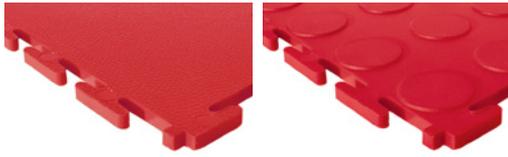


Flat design suitable for vehicular traffic


Raised disc design suitable for pedestrian traffic

Sizes & Coverage

	Size	Qty	Covers
Tiles	7mm x 500mm x 500mm	10 tiles	2.4m ²
Edge Ramp	7mm x 500mm x 90mm	6 ramps	
Edge Ramp & Corner	7mm x 590mm x 90mm	each	

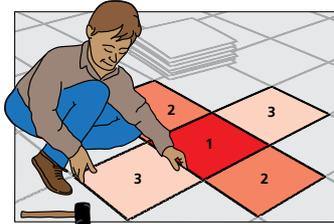

Easy to install

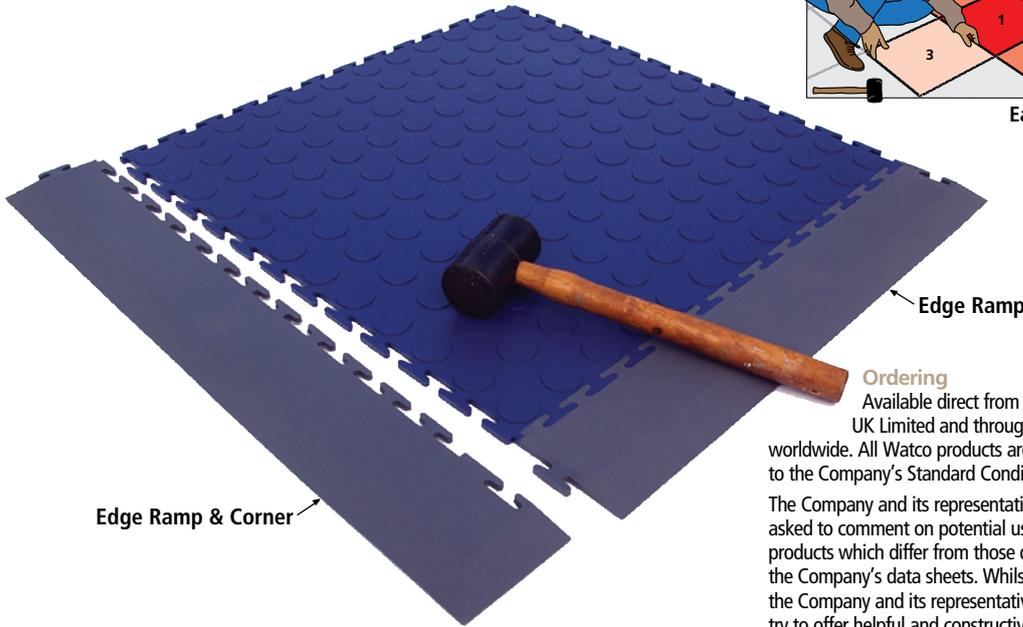

Ordering

Available direct from Watco UK Limited and through agents worldwide. All Watco products are sold subject to the Company's Standard Conditions of Sale. The Company and its representatives are often asked to comment on potential uses of Watco products which differ from those described in the Company's data sheets. Whilst in such cases the Company and its representatives will always try to offer helpful and constructive advice, the Company cannot be held responsible for the results of such uses unless they are specifically confirmed in writing by Watco.

Specifications

Composition	50% virgin PVC & 50% recycled PVC
Manufacture	Injection moulded
Standards & Accreditation	Meets and exceeds the requirements of BS EN 649 BBA96/3229 Details sheet No.3
Durability & Lifecycle Cost	The anticipated lifespan of Watco tiled flooring is in excess of 25 years. As individual tiles and ramps can be replaced if damaged or worn, the tiles offer significantly lower life cycle costs than surfaces which require bonding to the substrate
Guarantee	All Watco Interlocking Flooring tiles are guaranteed to remain free from manufacturing defects for 5 years from the date of supply
Dimensions (mm)	Tiles: 7 x 500 x 500; Ramps: 7 x 500 x 90; Ramp Corners: 7 x 590 x 90
Weight	8.3kg/m ²
Hardness	89-92 Shore A
Fire Performance	The PVC used does not support combustion and achieves Class 1 spread of flame when tested to BS476: Part 7
Anti-Slip Qualities	BS6677 Part 1:1986 Greater than or equal to 35L, low risk of slipping
Abrasion Wear	Group T (<2.0mm ² /100 revs) (EN660-2) 16
Mechanical Resistance	17N/mm ² to DIN53504
Dimensional Stability	BS EN434:1994 – maximum change in dimension <0.1%
Chemicals	PVC is resistant to most commonly used chemicals and hydrocarbons. A comprehensive chemical resistance chart is available upon request. Caution is advisable if Ketone solvents are in use.
Colour Fastness	>6 (EN20105:B02 Method 3)
Sound Absorption	Noise reduction of up to 46db is achieved
Installation	All installations in accordance with Code of Practice BS8203:2001 and Watco UK Ltd instructions
Cleaning	Can be cleaned by damp mopping or rotary scrubber dryer

WATCO®

Watco UK Limited

Eastgate Court, 195-205 High Street, Guildford, Surrey GU1 3AW, UK
Tel: 01483 425 000 • Fax: 01483 428 888
www.watco.co.uk • E-mail: sales@watco.co.uk

Also available
from Watco

Floor Paints & Coatings

Dustproofers & Sealers

Line Marking

Flooring

Anti Slip Coatings

Anti Slip Products

Floor Repair Materials

Screeds

Preparation Materials

Masonry Repair Materials

Wall Coatings

Exterior Products

Traffic Control

Metal Coatings

Roofing

Quality Certified

ISO 9001
BUREAU VERITAS
Certification



Designed, manufactured and supplied under an ISO 9001 quality management system