



SAFETY AT THE HIGHEST LEVEL

# Roof-Walk

## Assembly Instructions



Easi-Dec Access Systems Ltd.,  
Merlin House,  
Blaydon Road,  
Sandy  
SG19 1RZ  
Tel: +44 (0) 1767 691812  
Fax: +44 (0) 1767 691802

E-Mail: [info@easi-dec.co.uk](mailto:info@easi-dec.co.uk)  
Internet: [www.easi-dec.co.uk](http://www.easi-dec.co.uk)

**PLEASE BE ADVISED:** Before assembling the Roof-Walk for the first time, it is highly recommended that Installers familiarise themselves with the component parts and carry out a test assembly and disassembly in a safe area away from the point of final installation. All component parts detailed in the operating instructions must be used in the assembly of the system. Should a piece be missing or appear defective do not continue to assemble and contact Easi-Dec Immediately.

**Step1**



Lay out the components ready for assembly.

**Step 2**



Attach the first support Batten to the Board-Walk section using the captivated pins in the hole in the stiles.

**Step 3**



Repeat **STEP 2** for the second Batten. **Step 1 & 2** should be repeated for each additional Board-Walk.

**Step 4**



Tie the supplied strap to the top rung of the Board-Walk.

**Step 5**



With the strap tied on securely lower the Board-Walk panel onto the roof. You would repeat these steps for additional Board-Walk panels. This picture is for demonstration purposes only.

**Step 6**



Connecting Additional Board-Walk together, follow **STEP 4 & 5** in these instructions for laying the board walk into position.

**Step 7**



Standing on the first Board-Walk, slide through the Locking pin.

**Step 8**



When the Locking pin is in place secure with the supplied 'R' clip.

**Step 9**



Install the two number trolleys on the separate tracks of Board-Walk. Positioning the rollers on the stiles of the staging and engaging the hooks on a rung.

**Step 10**



Remove the height adjusting pin and raise the height of the platform to the horizontal position. Remember this is usually set at Roof level.

**Step 11**



Repeat **STEP 10** for the height adjustment of the trolley on the second roof-Walk in.

**Step 12**




Position the Cat-Walk onto the trolleys.

**Step 13**



The Catwalk should be positioned uniformly over the trolleys.

**Step 14**

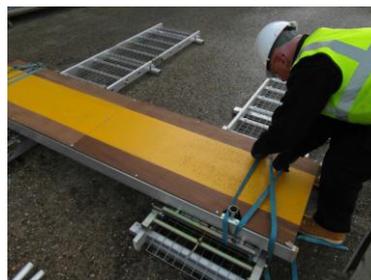

The Platform is now strapped to the trolleys with the ratchets straps provided. Repeat strap attachment for the second trolley.

**Step 15**



Fit the two end uprights into the sockets and secure with the supplied pin and 'R' clip.

**Step 16**



Fit the mid-rail into position.

**Step 17**



Fit the top rail and secure both the mid and top rails to the end uprights with the grub screws provided.

**Remember**

- If working within 2m of an Edge the edge protection must be provided.
- All Ladders should be erected using 4:1 rule and tied off for maximum safety.
- Always clip on to the 3m safety-line fixed to one side of the platform with a lanyard whenever possible.
- Always assess the site for suitability
- Always strap the staging securely onto the Roof-Walk Trolleys.
- Maximum load is 150Kg per Board-Walk

**Dismantle:** Reverse the above assembly.