



SAFETY AT THE HIGHEST LEVEL

Hands Free Ladder.

Assembly Instructions



Easi-Dec Access Systems Ltd.,
Merlin House,
Blaydon Road,
Sandy
SG19 1RZ
Tel: +44 (0) 1767 691812
Fax: +44 (0) 1767 691802

E-Mail: info@easi-dec.com
Internet: www.easi-dec.com

PLEASE BE ADVISED: Before assembling the Hands Free Ladder for the first time, it is highly recommended that Installers familiarise themselves with the component parts and carry out a test assembly and disassembly in a safe area away from the point of final installation. All component parts detailed in the operating instructions must be used in the assembly of the system. Should a piece be missing or appear defective do not continue to assemble and contact Easi-Dec Immediately.

Step 1



FIG 1. Roller wheels

Roll the Ladder up the wall into position with the roller wheels.**FIG 1.** Always erect using the 4:1 rule.

Step 2



Level the Hands Free Ladder adjusting the feet either up or down. Make sure the Pin and 'R' Clips are both replaced.

Step 3



Lift the upper Ladder to the desired location and re-seat onto the rungs with the attached hooks. Make sure the Ladder is positioned correctly using the 4:1 rule.

Step 4



Release the rear leg by removing the Pin and 'R' Clips and re-fit into the second hole located on the angle bracket.

Step 5



Release the foot allowing it to drop onto the ground and refit the Pin and 'R' clip to the nearest hole.

Step 6



Always tie the Hands Free Ladder to the building with the Tie-off kit supplied.

Step 7

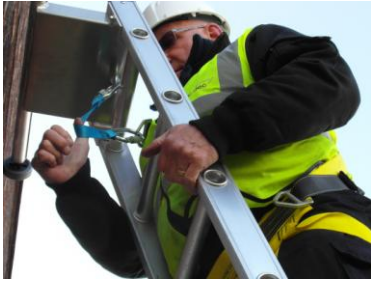


FIG 2. Ascended the Ladder

Having ascended the Ladder **FIG 2**. Attach your Harness or safety belt (Not Supplied) to the underside of the tool tray using a short (half metre) Lanyard. **NOTE:** This is designed purely as a restraining device to prevent the user from over reaching which is a major cause of Ladder accidents.

Remember

- Always fit the Pins and 'R' Clips.
- Work carefully – Never rush.
- Do not use in adverse weather conditions.
- Keep the Ladder Level, using the Leg adjustments provided.
- Always Tie the Ladder to the building.
- Do not attempt to move the Hands Free Ladder with material on the tool tray.
- Always erect using the 4:1 rule.

Dismantle: Reverse the above procedure.