



SAFETY AT THE HIGHEST LEVEL

## Anchor-Fix.

### Assembly Instructions



Easi-Dec Access Systems Ltd.,  
Merlin House,  
Blaydon Road,  
Sandy  
SG19 1RZ  
Tel: +44 (0) 1767 691812  
Fax: +44 (0) 1767 691802

E-Mail: [info@easi-dec.com](mailto:info@easi-dec.com)  
Internet: [www.easi-dec.com](http://www.easi-dec.com)

**AF010**  
**Issue 01**

**PLEASE BE ADVISED:** Before assembling the Anchor-Fix for the first time, it is highly recommended that Installers familiarise themselves with the component parts and carry out a test assembly and disassembly in a safe area away from the point of final installation. All component parts detailed in the operating instructions must be used in the assembly of the system. Should a piece be missing or appear defective do not continue to assemble and contact Easi-Dec Immediately.

**Step1**



Lay out the components ready for assembly.

**Step 2**



Tie the strap around the footing Ladder stile and the third rung of the Ladder.

**Step 3**



Repeat **STEP 2** for the second strap; tie the strap around the third rung and the footing Ladder stile.

**Step 4**



Slacken the bolts on the Anchor fixing housing.

**Step 5**



Position the Footing Ladder into the anchor fixing housing.

**Step 6**



Tighten the bolts from the anchor fixing housing with the wing nuts provided; make sure the Ladder feet are firmly seated.

**Step 7**




Feed the tied footing Ladder strap through the ratchet buckle.

**Step 8**



Feed the second tied footing Ladder strap through the second ratchet buckle and then tension both straps making sure the Ladder is vertical when under tension.

**Step 9**

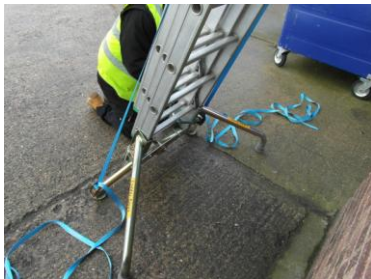

Foot the Ladder or use a suitable Ladder safety device, such as Easi-Dec Ladder spurs before using.

**Remember**

- Always check the equipment for damage before use.
- Work carefully – Never rush.
- Do not use in adverse weather conditions.
- Always Tie the Ladder to the building.
- Always erect using the 4:1 rule.

Dismantle: Reverse the above procedure.