


OBEXION ID3 INDUSTRIAL DOOR

ACCREDITATIONS

- Independently tested by the Loss Prevention Certification Board (LPCB)
- Certified to LPS 1175 Issue 8, C5 (SR3)
- Secured by Design Police Preferred Specification

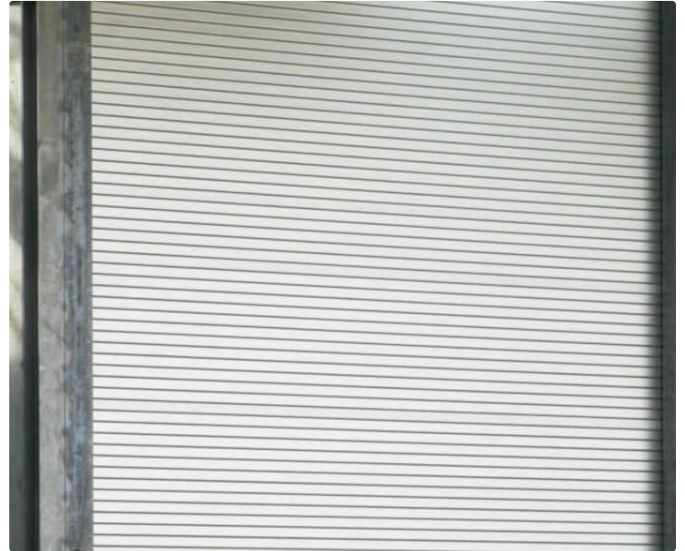

CERTIFIED PROTECTION AGAINST:



Forced Entry:
Bodily Force

Mitigation of opportunist intruder attempts using manual or bodily force including tools.



Forced Entry:
Power Tools

Protecting against deliberate forced entry of premises using mechanically-enhanced power tools.

The Obexion ID3 is an industrial door certified to LPS 1175 Issue 8, C5 (SR3) standard. It is designed to withstand attack from a deliberate forced entry, using bodily force and a wide selection of attack tools, including mechanically enhanced power tools.

It is typically used to protect and secure commercial and storage buildings with high value contents, utilities buildings and data and communications centres.

Thermal, acoustic and high wind resistance upgrades are available and the Obexion ID3 can be fitted with either manual or automatic locking systems.

- Aluminium, galvanised steel or stainless steel curtain construction
- Single skin steel curtain construction
- Polyester powder coated to any standard RAL/BS colour
- Manual or auto locking
- High or standard duty cycle motors
- Thermal insulation upgrade
- Acoustic insulation upgrade

OBEXION ID3 INDUSTRIAL DOOR

SUITABLE APPLICATIONS INCLUDE:

- High value commercial buildings
- Utilities Buildings
- High value storage
- Data centres

APPROVED DIMENSIONS

Minimum Certified Width: 1000
Maximum Certified Width: 8000
Minimum Certified Height: 1000
Maximum Certified Height: 8000

CURTAIN

Single Wall Galvanised Steel
Double Wall Aluminium
Double Wall Galvanised Steel
Double Wall Stainless Steel

BOTTOM RAIL

Reinforced steel
Weather seal

OPTIONS

- Thermal upgrade available
- Acoustic upgrade available
- High wind resistance upgrade available

FINISH


Finish as delivered: Polyester powder coated in standard RAL/BS colours

PRODUCT REFERENCE

Obexion ID3 Industrial Door

PERFORMANCE

Certified to LPS 1175 Issue 8 C5 (SR3)

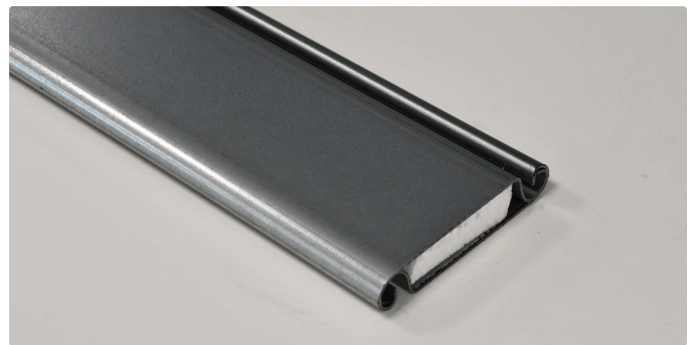

SUITABLE SUBSTRATES:

- Brickwork
- Blockwork
- Concrete
- Structural Steelwork
- Sub assembly steel framework

FRAMES/GUIDES

Two-part galvanised steel guide with rubber seals

OPERATION/LOCKING

Hold-to-run operation with manual locks
Automatic operation with electronic locks
Safety on close as assessment directs



LPS 1175 Issue 8
Cert. No. 1075e



Asse. to ISO 9001:2015
Cert/LPCB ref. 1396



Secured by Design



Police Preferred Specification