

OUTA-DOR

Strong, versatile
and durable
external doorset

MADE IN
BRITAIN



**STEEL DOORS
FOR THE
REAL WORLD**



**TEN YEAR
GUARANTEE**

Our doors are manufactured in a range of materials offering strength and durability. Our OUTA-DOR external doors are manufactured using magnelis sheets and can offer an anti-corrosion warranty of up to 10 years with a standard PPC coating.*



**MADE TO
MEASURE**

All steel doors are made to order at our UK factory, are available in a wide range of heights and widths to suit any requirement, and are delivered fully assembled.



**CE marked to
BS EN 14351-1**

sara

> LOUVRE PANELS

Construction:	Standard Louvre offers 50% air flow with louvre blades constructed to stop birds. Frames are 1.2mm thick and blades 0.7mm.
Options:	Fly mesh available as an optional extra, also custom sizes.



457x1524mm

457x457mm
top


457x457mm
bottom

457x457mm
twin



> PANEL ARRANGEMENTS

Guidance notes:	Panels can be solid, glazed or louvred
Construction:	Standard side panels are available up to 1290mm wide x 2900mm high. Standard over panels are available up to 1290 x 2900mm (single door) or 1290 x 2600mm (double door).
Options:	Hinged panels. Removeable, flush, glazed or louvred are all available. Please consult the Sales office with specific requirements.

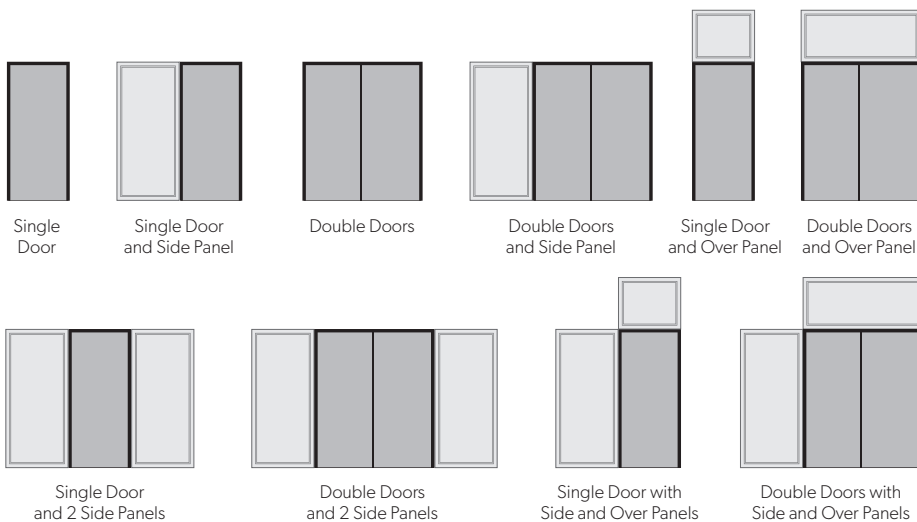

> FINISHES


** Did you know we send out touch up kits with every door?*

Standard	Optional				
Polyester Powder Coated from Standard Colour Range	Polyester Powder Coated from Non-Standard Colour Range	PVC Laminate from Standard Range	Woodgrain PVC Laminate	Stainless Steel Brushed, Polished or Patterned	Unfinished for site finishing

> DOOR FRAME


Construction: Folded from 1.6mm Magnelis®.
Screw and tab construction with 4no. adjustable fixing feet per jamb, variable sub frame supplied as standard to accommodate site tolerance of -0/+30mm.
The frame is fitted with 4no. Dog-bolt hinges as standard.

Profile: Types A and B available in both inward and outward opening versions.

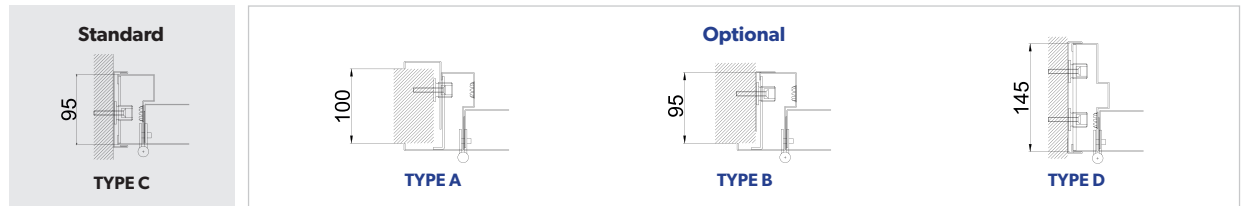

> THRESHOLD

Optional dropseals and/or rain deflectors are available.

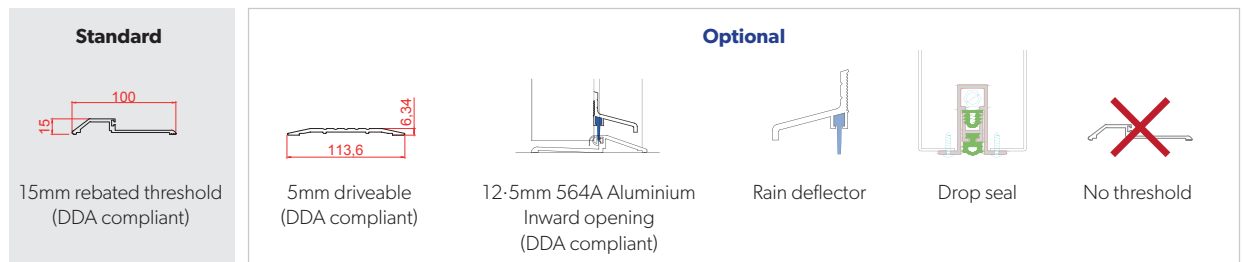

> SIZES

Sizing: Doors are custom manufactured in 10mm increments for single openings 690mm to 1290mm and double openings 1290mm to 2600mm, at heights up to 2900mm.

** All of our doors are made to measure!*

Contact the Sales office for special configurations and finishes.






> VISION PANELS

Guidance notes: To comply with Part M of the Building Regulations 2004 doors circulation across routes should have visibility glazing. (Vision panels less than 50% of the total door area are exempt from Part L of the Building Regulations).


Construction: Welded construction from 1mm cold rolled steel, screwed together from one side

Options: Double Glazed as standard. Alternative options include 6mm GWPP or a 19mm Double Glazed Unit (6.4/6/6.4 mm laminate). Custom sizes and glass are available to customer requirements

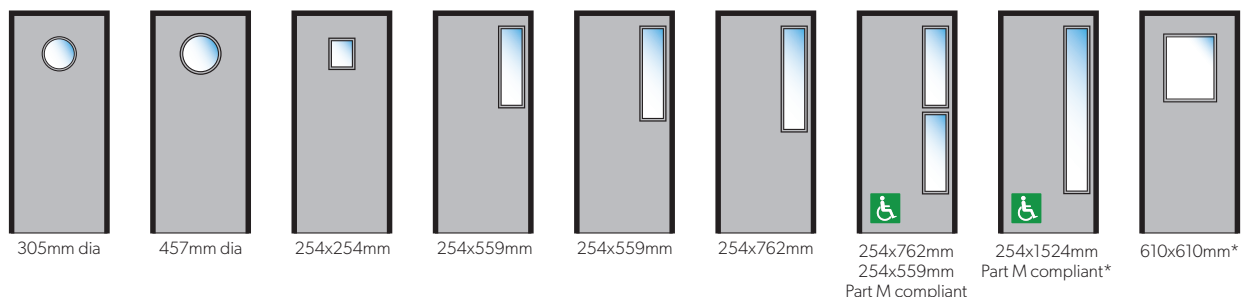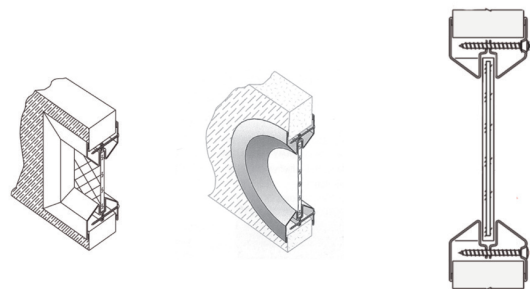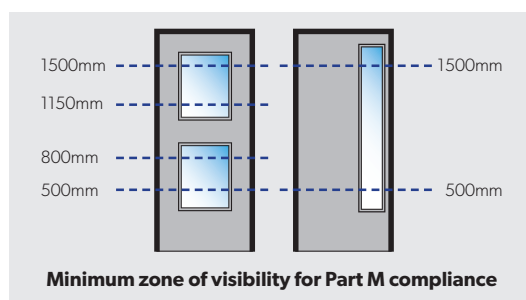

> LOUVRE PANELS

Construction:	Standard Louvre offers 50% air flow with louvre blades constructed to stop birds. Frames are 1.2mm thick and blades 0.7mm.
Options:	Fly mesh available as an optional extra, also custom sizes.

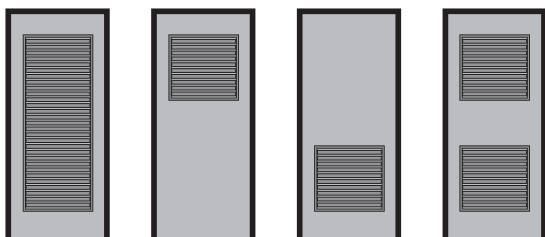

457x1524mm

457x457mm
top


457x457mm
bottom

457x457mm
twin



> PANEL ARRANGEMENTS

Guidance notes:	Panels can be solid, glazed or louvred
Construction:	Standard side panels are available up to 1290mm wide x 2900mm high. Standard over panels are available up to 1290 x 2900mm (single door) or 1290 x 2600mm (double door).
Options:	Hinged panels. Removeable, flush, glazed or louvred are all available. Please consult the Sales office with specific requirements.

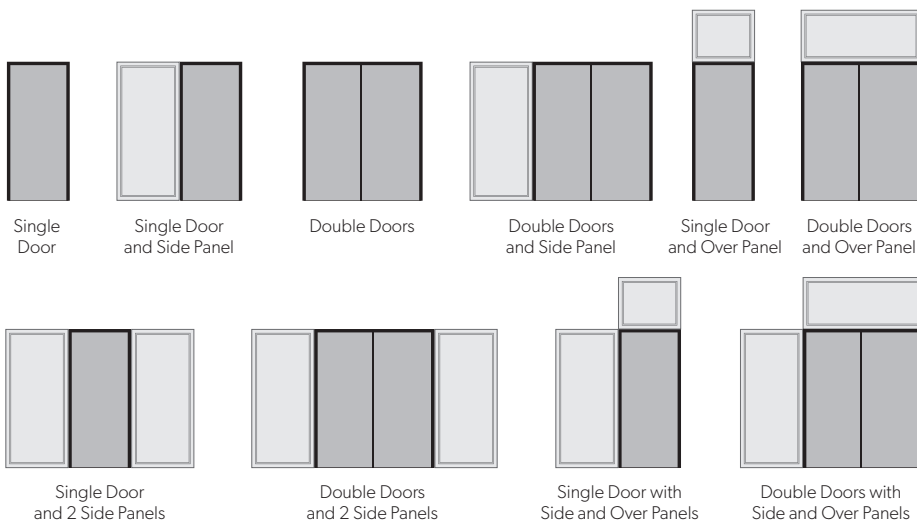

> FINISHES

** Did you know we send out touch up kits with every door?*

Standard	Optional				
Polyester Powder Coated from Standard Colour Range	Polyester Powder Coated from Non-Standard Colour Range	PVC Laminate from Standard Range	Woodgrain PVC Laminate	Stainless Steel Brushed, Polished or Patterned	Unfinished for site finishing