


ReadySeal G120 Reinforcement Fleece

Product Data Sheet

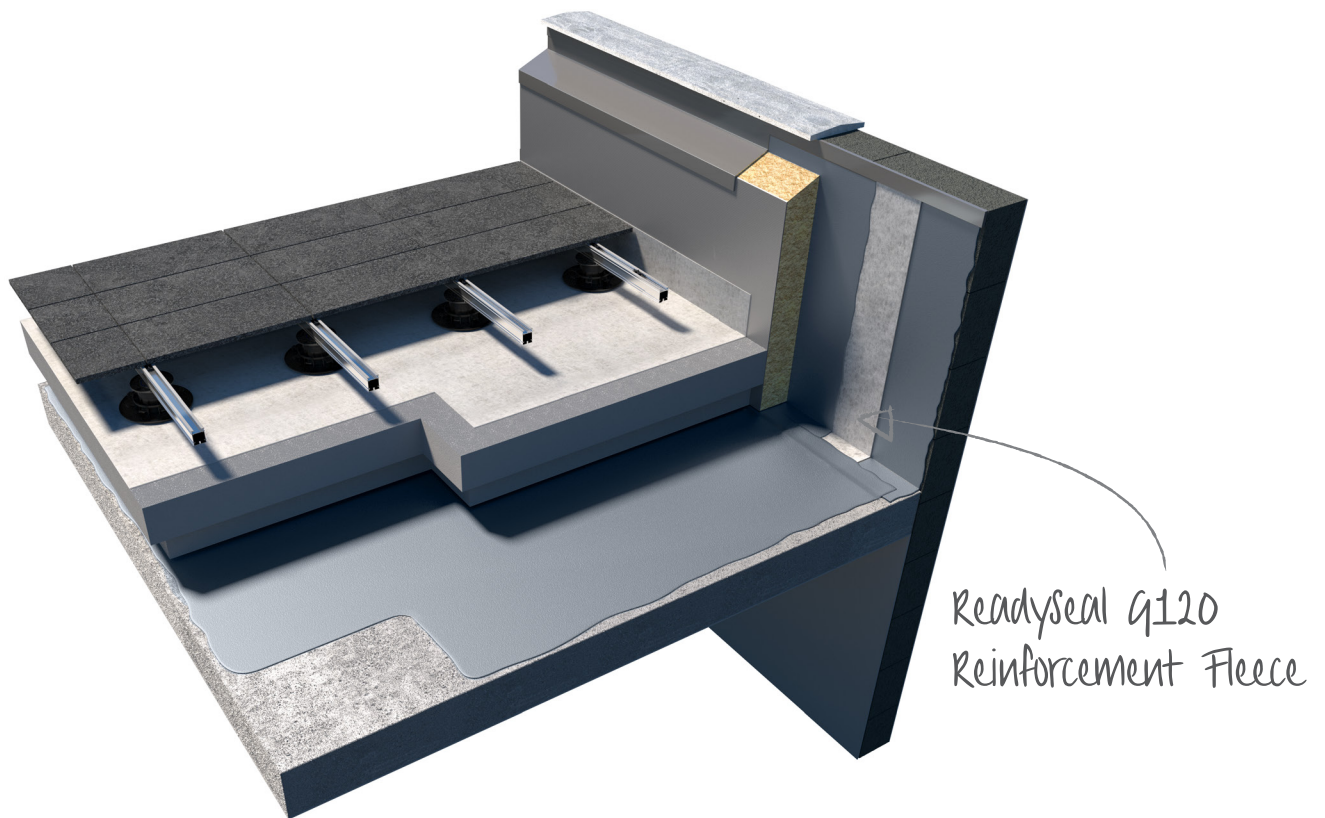

ReadySeal

G120 Reinforcement Fleece

General Information

Radmat G120 Reinforcement Fleece is a reinforcing membrane for embedding into ReadySeal to aid in the reinforcement of construction details, flashing joints, cracks and gaps.

For a comprehensive NBS J31 specification contact Radmat Building Products.

Installation Instructions

Embed reinforcement fleece into ReadySeal immediately after the first coat, ensuring a smooth application by carefully using a soft brush. Ensure each roll of Fleece overlaps the previous by at least 75mm. Install in accordance with the Directions of Application in the ReadySeal Waterproofing Membrane Product Data Sheet.

Delivery conditions

Delivery

On a pallet.

Storage and shelf life

Packed rolls must be stored stood on end on a dry and flat level surface.

Store temperature is between -10 and 50° C.

PRODUCT DESCRIPTION		
Appearance	White polyester fleece	
DECLARED PERFORMANCE		
Essential characteristics	Performance	Unit
Material	Polyester	-
Colour	White	-
Weight	120	g/m²
Length	50	m
Width	250/350/500/700/105	mm
Tensile Strength MD	270	kN/m
Tensile Strength CD	250	kN/m
Elongation MD	50	%
Elongation CD	90	%

This information given in good faith and is based on the latest knowledge available to Radmat Building products Ltd. Whilst every effort has been made to ensure that the contents of the publication are current while going to press, customers are advised that products, techniques and codes of practice are under constant review and liable to change without notice.

For further information on Radmat products and services please call **01858 410372**, email techenquiries@radmat.com or visit our website www.radmat.com **OCT 2020**