

# MINERAL TERRAMESH®

# MACCAFERRI



## ROCK FACED REINFORCED SOIL SLOPE SYSTEM

**Mineral Terramesh®** is a unique and simple to install soil reinforcement system with a sloping rock face finish.

It is ideal for use where a modern, clean-faced aesthetic is preferred.

Mineral Terramesh® can be used either alone or in conjunction with our ParaGrid® or ParaDrain® geogrids depending on the height of the reinforced soil structure.



Mineral Terramesh® is an environmentally friendly modular system. When used with ParaGrid® or ParaDrain®, site-won materials can often be used as structural backfill to the reinforced soil slope.

This has a triple benefit to the client:

1. No need for expensive quarried granular materials to be imported for structural backfill
2. No need to dispose of site-won soils into landfill
3. Fewer truck movements on roads around the project site



### Uses of Mineral Terramesh®

- M** Terraces on development sites
- M** Wing walls
- M** Whenever level changes on a site need retention
- M** Acoustic and safety bunds
- M** Reinforced soil slopes where differential settlement could be an issue

### Features and benefits



- M** **Rapid assembly:** Preassembled unit with components factory-fitted ready for erection on site
- M** **Design life:** 120 year design life capability
- M** **No external formwork:** Heavily galvanised welded mesh panel and bracing struts hold the face at the correct angle during construction
- M** **Simple installation:** No bodkin or connection is required between geogrid and Mineral Terramesh® unit.



# MINERAL TERRAMESH® ROCK FACED REINFORCED SOIL SOPE SYSTEM

## Design

- MacSTARs – for designing geogrid reinforced walls and slopes
- Use ParaGrid®/ParaDrain® for taller slopes and/or accommodating higher loads
- Design life: Heavily GalMac® galvanised wire with additional PoliMac® coating offers a system design life of >120 years

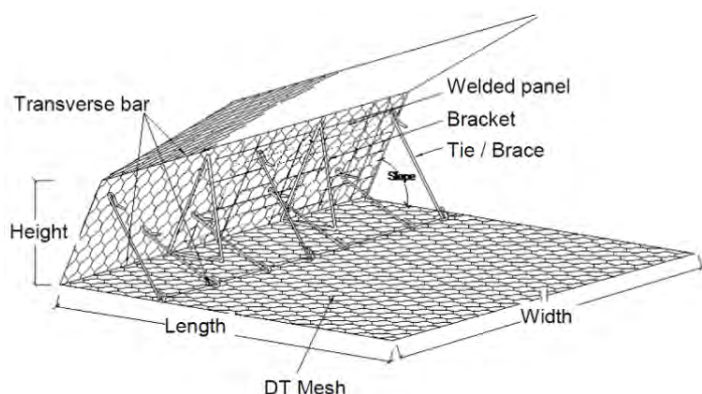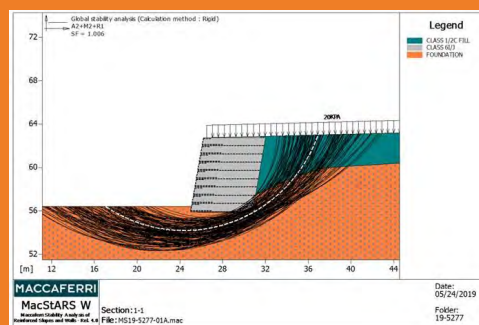

Finished face detail

## Simple installation steps

- M** Unit is erected on site
- M** Bracing struts hold face at correct angle
- M** Place ParaGrid®/ParaDrain® geogrid if required
- M** Place and compact structural backfill onto geogrid tails
- M** Place stone of correct size for 300mm immediately behind face of unit
- M** Repeat with next unit



Corner detail

### Maccaferri Ltd

9 Fenlock Court, Blenheim Office Park,  
Long Hanborough, Witney, OX29 8LN

T: +(44) 01865 770 555

E: [info.uk@maccaferri.com](mailto:info.uk@maccaferri.com)

[www.maccaferri.com/uk](http://www.maccaferri.com/uk)