


Fig 1. Side view of ASB Series.

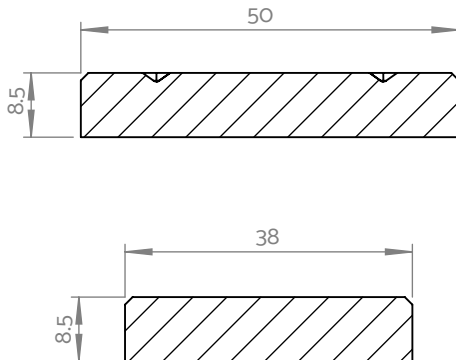

Item: AATi™ type ASB38P® + ASB50® Insert Bars with silicon carbide granules cast into the metal matrix of the wearing surface.

****HDLT™:** This is a registered design- Protected by European Registered Design No. 002178178-0001.

Materials: Nickel Bronze, Gunmetal, Aluminium & Cast Iron (**zinc plated black*). Different materials increase the longevity of the product, please speak to AATi technical team for further information.

Application: Specially designed for use where a complete nosing profile is considered unnecessary but where high antislip performance and wear resistance are required at the front edge of the step. Also for use as an antislip insert bar on other flat or sloping surfaces. The bars are installed so that the top face sits 1.5mm - 2mm above the surrounding surface.

Environment: Metals are sustainably sourced coming from predominantly recycled origins and all the metals we use through our production process can be 100% recycled at our production facility.

Compliance: This anti-slip floor plate provides colour contrast & slip resistance in spirit of British Standards BS 8300 & Building Regulations Part M & K. Please speak to our technical team to assist you with selecting the correct product and material for your application. Information on light reflectance values available upon request.

Cut to suit: Anti-slip floor plates can be produced to suit any stair width (**Fig 2**). Individual profiles can be made up to 1.6m in Cast Aluminium, Nickel Bronze & Gunmetal. Cast Iron (**zinc plated black is only available in max length of 1.5m*). Longer lengths shall be supplied in multiple pieces. All products are supplied cut to length, pre-drilled and countersunk with production drawings submitted for client approval.

Fig 2. Plan view of ASB Series.

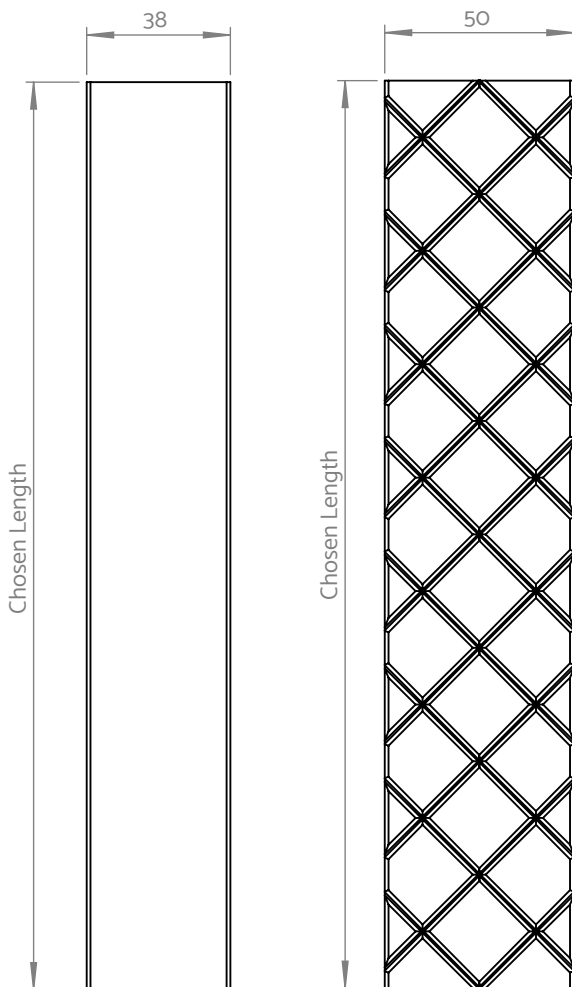


Fig 3. 3D view of ASB/50.

