

# Ambi-Soaker - Thin Leading Edge

Ambi-Soaker Universal Dry Fix Abutment Soaker for Large Format Thin Leading Edge Tiles

#### Uses

- Thin Leading Edge Tiles
- Abutments between a pitched roof and a wall
- New build or refurbishment projects

### **Features and Benefits**

- Pre-formed product shape saves cost and labour time compared to site-fabricated soakers
- Patent Pending design provides a universal product with fixing tabs for both LH or RH Installations
- Fixing tabs can be trimmed away as required
- Sits underneath abutment flashing material. Compatible with stepped or continuous flashings
- Protects roof abutment areas from rain and weather
- Long lasting, reliable and virtually maintenance free
- Lightweight product allows easy handling and installation
- Simple and clean mortar-free installation process
- Helps to minimise contamination of water course compared to lead soakers
- Reduced lead usage within the build helping to deter theft
- Resistant to UV light and acid rain

## Quality

- Manufactured to BS EN ISO 9001 and BS EN ISO14001
- Complies with all relevant sections of the Building Regulations
- Satisfies all relevant NHBC requirements


# Compatibility

Most Thin Leading Edge large format tiles from major manufacturers including:

- Marley Edgemere
- Redland Richmond
- Sandtoft TLE
- Russell Galloway
- Lagan Elite
- \*Maximum compatible tile thickness = 17mm

## Material and Colour Choice

- UV protected and colour-fast Polypropylene
- Available in Grey only

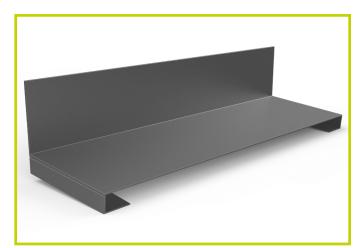

### **Installation Advice**

•Please refer to www.timloc.co.uk for recommended installation guidance.


## How to Order

• Ambi-Soakers are fitted one unit per tile for the entire length of the abutment. Check the pack quantity against the number of tiles in the run to ensure you have enough Ambi-Soaker units.


## **Product Codes**

Description	Colour	Pack Quantity	Product Code
Ambi-Soaker for Large Format Thin Leading Edge Tiles	Grey	50	AS-TLE

## **Product Dimensions**



#### Front Profile



**Side Profile** 

