

Eaves Bird Comb Filler

Designed to prevent entry of birds and vermin below profiled roof tiles

Use

- At the eaves of a roof
- Below profiled roof tiles to exclude birds and vermin

Features and Benefits

- Effective, quick and easy to fit
- Durable and totally resistant to decay
- Supplied in convenient 1m lengths

Quality

- Satisfies all NHBC requirements
- Manufactured to BS EN ISO 9001 and BS EN ISO 14001
- Complies with all relevant Building Regulations
- Meets all relevant British Standards

Material and Colour Choice


- Injection moulded in polypropylene
- Available in black only

Installation Advice

- Fit on the top of the fascia board before tiles are laid. The comb must angle outwards away from the roof
- Secure with clout nails through the holes provided
- Bed bottom row of tiles on to the comb

How to Order

- Measure the overall length of the eaves and divide by 1m to determine the number of combs required

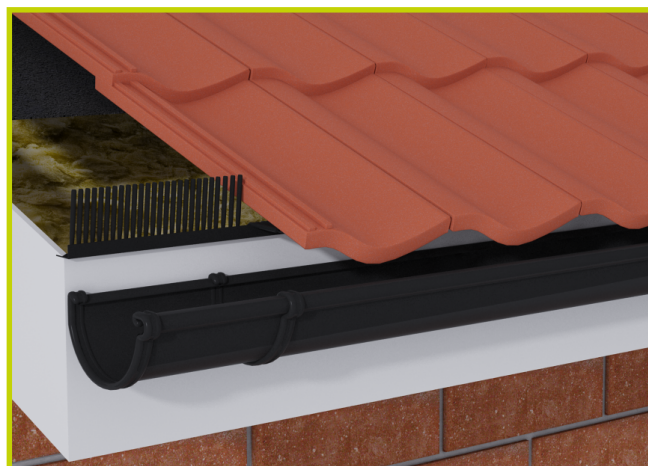

Bill of Quantity

G20 Carpentry/Timber Framing/First Fixing

Clause

900^ EAVES SOFFIT VENTILATION

- Manufacturer: Timloc Building Products, Timloc House, Ozone Park, Howden, East Yorkshire, DN14 7SD. T: 01405 765567 W: www.timloc.co.uk
- Product Reference: 1136
- Type: Eaves Comb Filler (1000mm)
- Colour: Black

Environmental Product Declaration

A quantification of environmental information regarding the life cycle of the Eaves Bird Comb Filler. GWP total is for production stages A1-A3. Verified in accordance with ISO 14025. View the full EPD at timloc.co.uk.

EPD Reference	EPD Mass (KG)	GWP A1-A3 (KG CO2e)
EPD HUB, HUB-1836	0.074	1.85E-03

Product Codes

Depth of Comb	Length	Pack Quantity	Product Code
55mm	1m	50	1136

Product Dimensions

