

elefant riste
- the original...

Stair treads type O5™-M"R"



- Removable nosing for added flexibility during installation
- Designed in accordance with BS EN 1991-1-1
- Slip resisting surface (Average Wet PTV: 79)
- Maximum 5 mm holes for pedestrian access in stiletto heels
- Can be supplied in accordance with "Part M", BS8300 & BS5395: Part 1
- With or without rear riser
- Optional powder coated visual nose
- Standard stock range available

One step ahead...



elefant riste
- the original...

Elefant Gratings Ltd.


UK Tel. 01732 884123
sales@elefantgratings.com
IRL Tel. 065 6841313
sales@elefantgratings.ie

Member of



Group

Stair treads type O5™-M"R"

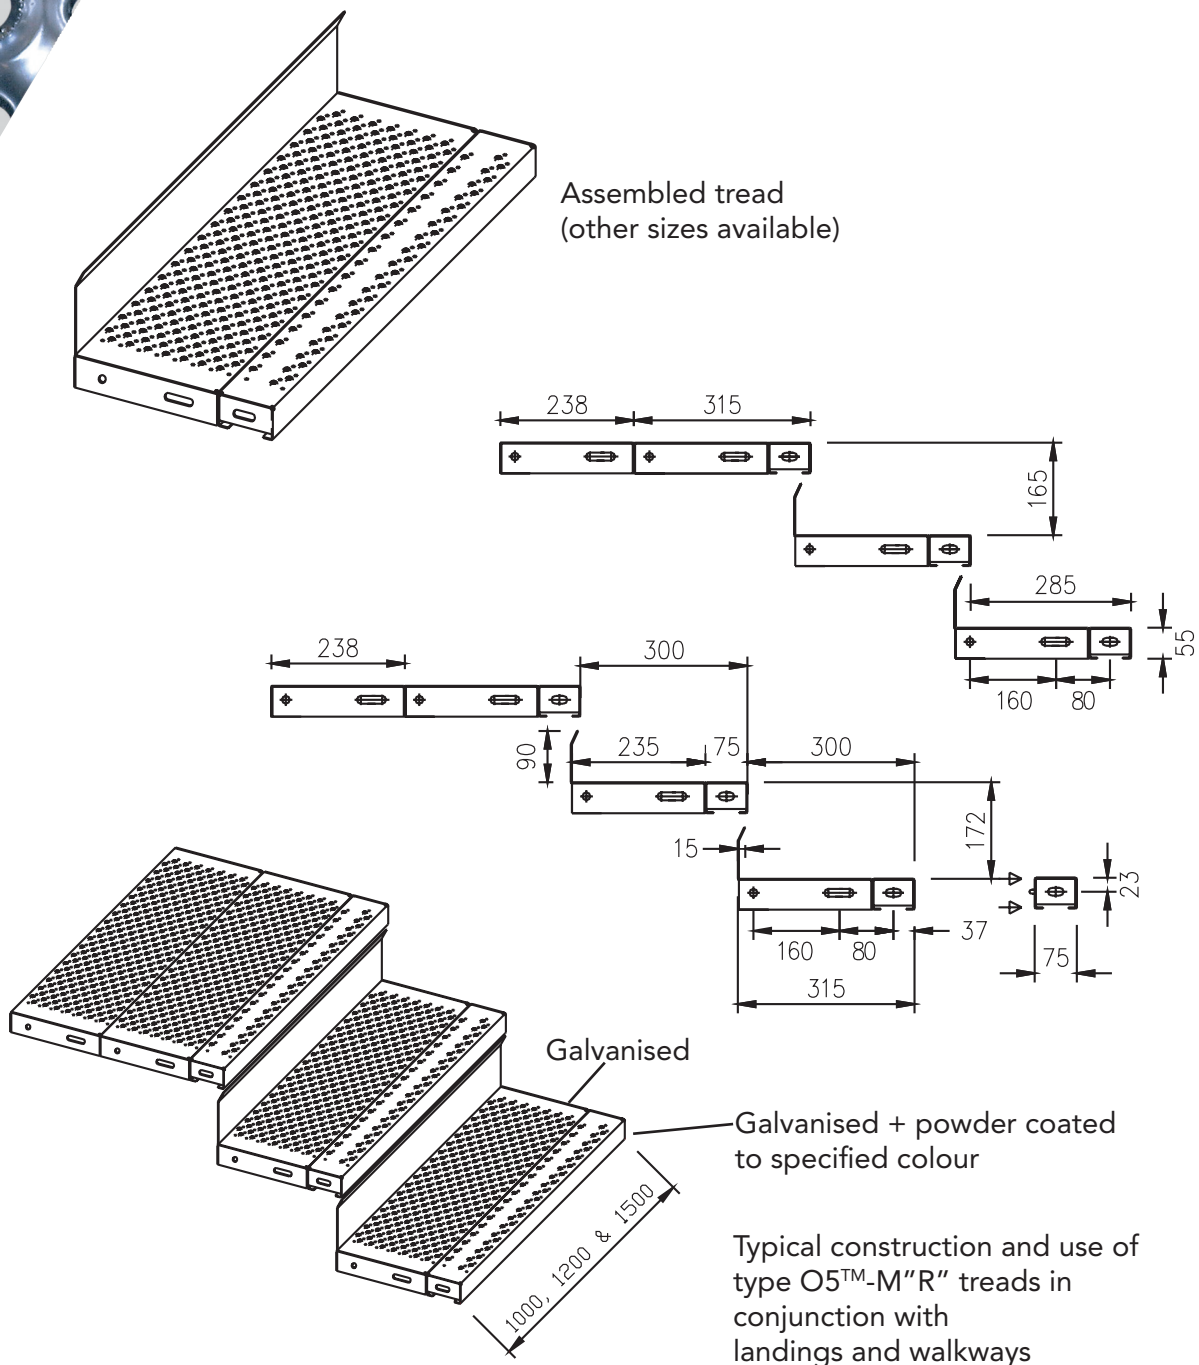

Stair tread type O5™-M"R" is based on the fabricated O5 M tread. Identified by 5 mm dia. punched and drainage holes is predominantly used in public areas and high working platforms.

Available from stock offering added flexibility with the removable nosing. Enables the galvanised nosing to be used during construction stages on site; then replaced by the Powder Coated Nosing, if applicable, prior to completion. This ensures the paint is not damaged by contractors and provides a better finish as the nosing is fully powder coated.

Manufactured from 2mm thick steel and available as Galvanised to BS EN 1461:2009. Optional Powder Coated to standard RAL colours available.

For further information, please contact our sales department.



Elephant Gratings Ltd.

UK Tel. 01732 884123
sales@elephantgratings.com

IRL Tel. 065 6841313
sales@elephantgratings.ie

Member of

