


DuPont Complete A2 Fire Performance System for Walls

The combination of lightweight Tyvek® Trifecta™** Airguard® A2 FR Airtight Vapour Control Layer and AirGuard® A2 FR Tape creates a **fire-retardant system compatible with the United Kingdom's stringent building regulations** for fire safety. Use together for through wall performance with the 25-year DuPont Warranty.


DuPont™ Tyvek® Trifecta™



For Architects/Engineers and Contractors who seek a reliable A2FR breather membrane (and its A2 FR tape) for use in exterior stud walls, Tyvek™ Trifecta® is an ideal solution as it provides **the perfect combination of features: weather resistant (W1), highly breathable (sd 0.08) and non-combustible (A2-s1, d0)**. It is ideal for light gauge steel frame systems and suitable for high rise construction above 18 meters.

With a width of 1.5m and a weight of 393 g/m², it is a very light and extremely robust product, that **allows easier and faster installation on job sites**, with less connections and hence less tape needed, resulting in a more costeffective and time-efficient solution for main contractors and installers. The intrinsic **high UV stability allows up to 12 months of free exposure**, avoiding any potential damages due to long lead-times on construction site or to cracks or open joints in the façade coatings.


DuPont™ AirGuard® A2 FR AVCL



Working on both exterior and interior fabric of a building, along with the DuPont™ AirGuard® A2 FR AVCL & Tape System, you can **achieve superior benefits for energy-saving, moisture management, air quality and climatic comfort to the building interior**, together with the durably enhanced fire-retardant function. This means that designers, contractors, owners and occupants have comfort in knowing that there is long term protection of the building and


that it surpasses current applicable regulations. Solutions and systems that have been tried and tested by independent bodies and certifiers, **backed up by a 25-year Warranty.**

DuPont™ AirGuard® FR System Tape



* product must be adequately installed to substrate

** Installed on mineral board with EN 13501-1 fire class A1 and A2-s1,d0 in combination with the use of DuPont™ AirGuard® FR system tape (1310FR) to seal the overlaps. Further specifications are detailed in the classification report which can be requested from a DuPont sales representative or by sending an email to tyvek.construction@dupont.com.

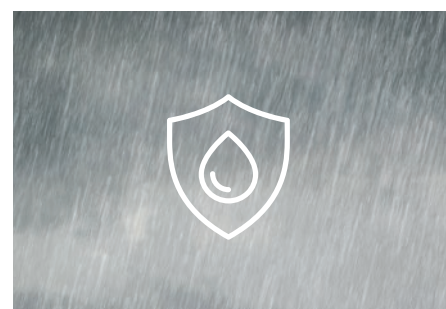

building.dupont.co.uk

NOTICE: No freedom from any patent owned by DuPont or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries or regions. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO EXPRESS WARRANTIES ARE GIVEN EXCEPT FOR ANY APPLICABLE WRITTEN WARRANTIES SPECIFICALLY PROVIDED BY DUPONT. ALL IMPLIED WARRANTIES INCLUDING THOSE OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. The buyer assumes all risks as to the use of the material. Buyer's exclusive remedy or any claim (including without limitations, negligence, strict liability, or tort) shall be limited to the refund of the purchase price of the material. Failure to strictly adhere to any recommended procedures shall release DuPont de Nemours, Inc. and its affiliates, of all liability with respect to the materials or the use thereof. The information herein is not intended for use by non-professional designers, applicators or other persons who do not purchase or utilize this product in the normal course of their business.