




These instructions must be followed to prevent injury to operatives or damage to the product.

- Create a lifting plan, noting the following specifics, to prevent injury to operatives or damage to the product during the lifting process.
- Refer to the individual pallet / product's weight sticker and make sure the lifting equipment is suitable for this weight.
- Inspect all the chamber's lifting eyes.
- Do not use chains. The product must be lifted using a 4-hook lifting spreader beam with the correct length and breadth for the widths of the chamber's lifting eyes.
- Under no circumstances should the lifting equipment impinge on the clear opening flange. This will apply pressure to the flange and will damage the chamber.
- Adhere to all current legislative and training requirements.

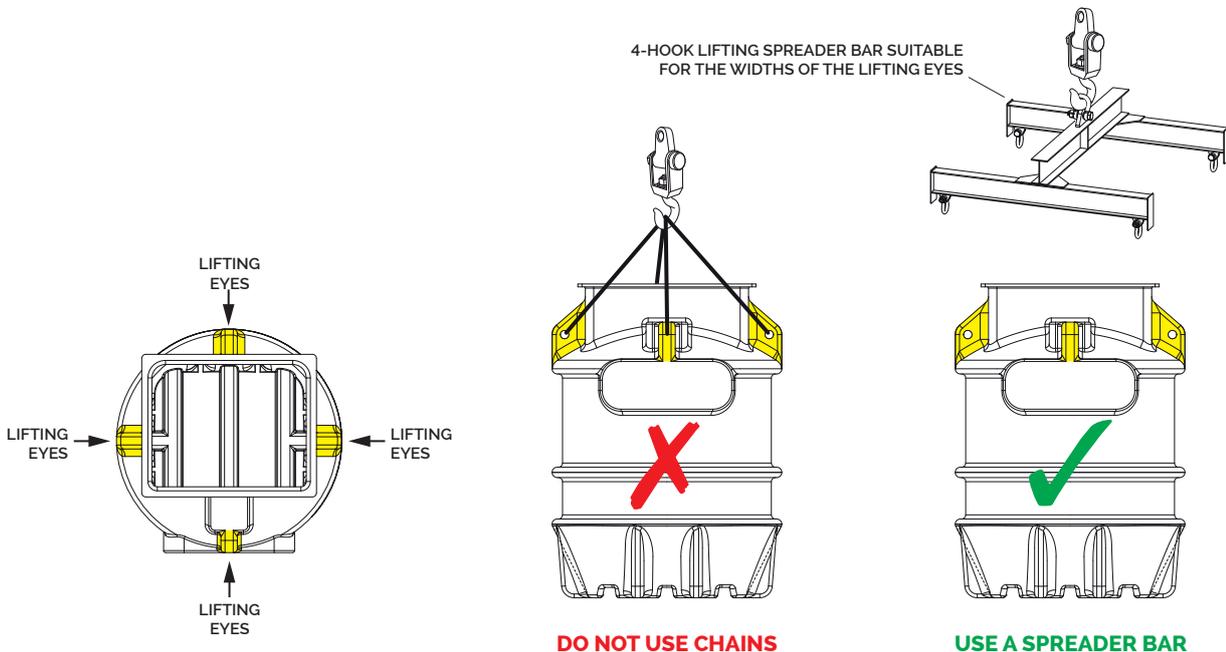

If you require further advice call 01992 523 523 before attempting to lift the product