




CAR PARK POSTS & TELESCOPIC BOLLARDS



A300 RANGE CAR PARK POSTS

Surface-fixed posts

The A300 range has represented the industry-standard for car park posts for many years - often copied but never matched. Sturdy construction, reliability and ease of use are the key features of the range. Surface-fixed posts offer ease of installation, without the need for any disruptive and expensive ground works. Folded down posts require a minimum clearance to the underside of vehicles of 110mm, making the A300 a suitable car park posts for use with almost all conventional vehicles. Posts are constructed from circular steel tube with a polyurethane cap which softens the impact when lowering onto the ground. There are 3 versions of the surface-mounted fold-down posts, all able to fold and in either direction, but each with its own unique locking mechanism.




A300

Fold-down post in galvanised finish, with integral lock
Lifting weight: 4kg

OPTIONS:

Yellow plastic coated post
Keyed alike or keyed to differ

The A300 is the standard fold-down that suits most sites. The lock is mounted in the cap area. The post is push-down to lock, and unlocked by pressing down on the cap and rotating the key. The post can then be fully raised or lowered, and relocked.




A300 GLC

Fold-down post in galvanised finish, with integral lock & removable hinge pin for FB14 padlock or similar
Lifting weight: 4kg

OPTIONS:

Keyed alike or keyed to differ

The A300 GLC is as the A300 but with a removable hinge pin that is secured in place by an FB14 padlock (please order separately). Emergency services carry an FB14 key so are able to remove the pin and lower the post easily for quick access, without destroying it.



A300 P

Fold-down post in galvanised finish, for padlock fixing (padlock not included)
Lifting weight: 4kg



The A300 P is secured in its upright position by fitting a padlock through the lower hole of the bar that protrudes through the post cap. Fitting the padlock in the upper hole allows the post to be raised and lowered and can be used to fit the lock to when not in use.



A300 RANGE CAR PARK POSTS

In-ground posts

There are 3 versions of in-ground A300 posts, all requiring minor groundwork for a secure installation. As with the surface-fixed models, the products are tried and tested as both robust and reliable. The A300 LF Li-Flat provides a neat flush-fitting solution with the post hinging into a galvanised ground box when not being used. Similarly, the socket of the A300 R Removable post sits flush with ground. The main difference between the two models is that the Removable post needs to be stored independently of the socket when not in use. The A300 F is a simple fixed post available in two sizes, designed to complement other models in the range. For all A300 posts lockable by padlock we recommend using FB14 locks as the emergency services carry an FB14 key so are able to unlock and lower / remove the post easily.

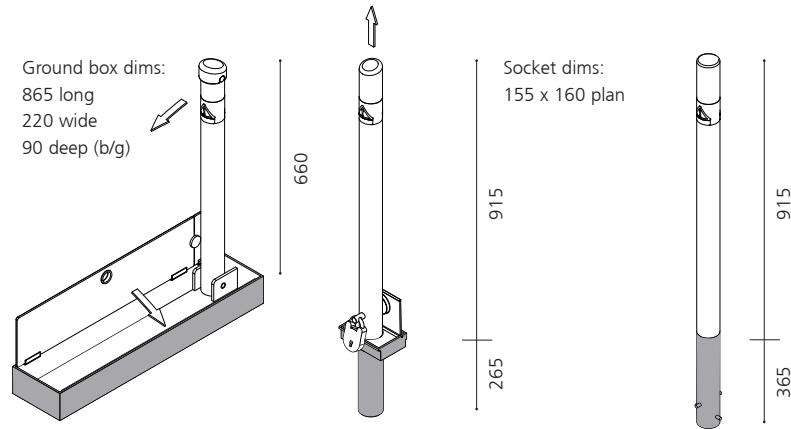

A300 LF

Fold-down Li-flat post and socket in galvanised finish, with integral lock
Lifting weight: 4kg

OPTIONS:

Yellow plastic coated post

A300 R

Removable car park post for padlock fixing (padlock not included)
Lifting weight: 8kg

OPTIONS:

Yellow plastic coated post

A300 F

Fixed car park post (Ø76) in galvanised finish

OPTIONS:

Ø48 post x 750 above ground

The A300 LF is ideal in areas where it is necessary to have the posts completely hidden and with no obstruction when not in use. The post is push-down to lock and is unlocked by pressing down on the cap and rotating the key. The post is then fully raised or lowered and relocked.

The A300 R is a removable car park post that is secured in position with an FB14 padlock (please order separately) or similar through the hole in the socket pin that passes through the post near ground level.

The A300 F is a fixed post available in two sizes, designed to complement other models in the range. The post is galvanised and fitted with a low profile plastic cap.



TELESCOPIC BOLLARDS




Robust in place, discreet when lowered

Furnitubes' range of telescopic bollards provide a robust security solution when raised into their upright position and minimal visual intrusion when lowered into the ground. The range comprises a variety of specification, shape, size and material options to suit many different applications - from prevention of unauthorised use of car parking spaces, through to protection against vehicular attacks. The bollards are designed with ease of use in mind - they are raised and locked into place with the integral high security lock in mere seconds. When not in use the posts are completely concealed in a ground socket with a hinged lid, which when lowered will protect against light rain and dirt ingress and also provides flush-fitting surface that does not present a trip hazard. If you require advice as to which model is best for your application, please contact our sales department who will be happy to discuss the options available and recommend the most appropriate product.



TELESCOPIC BOLLARDS

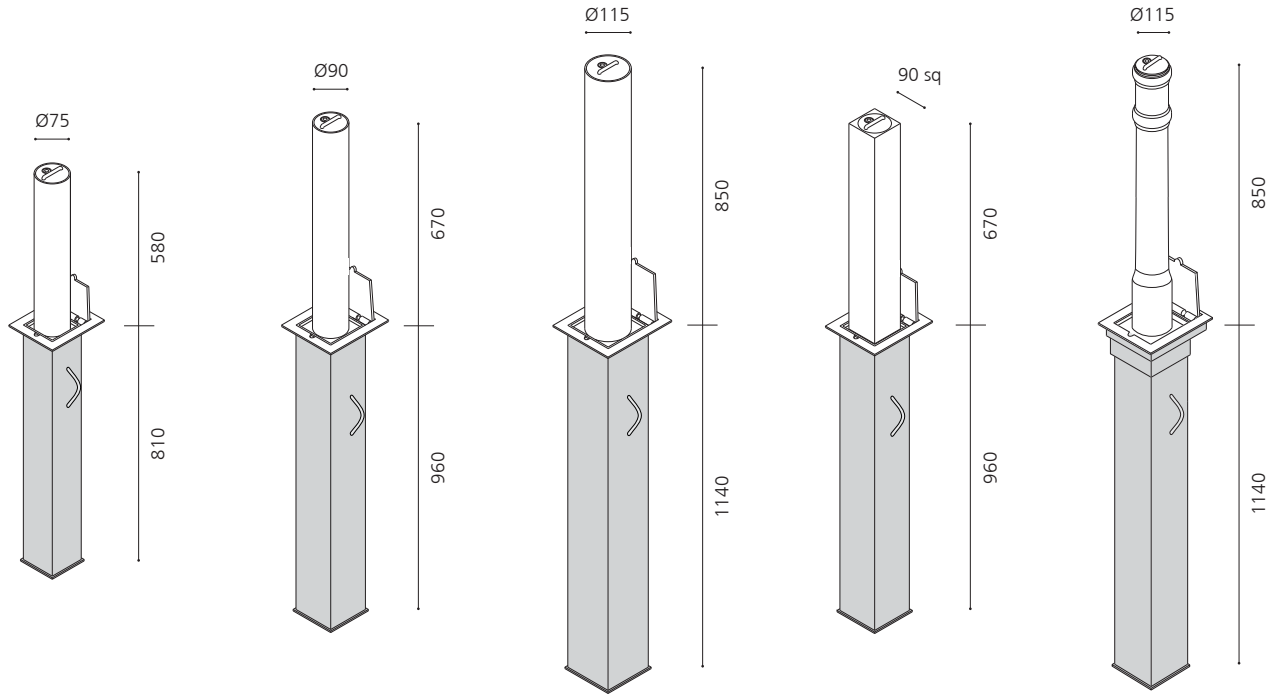

DRIVEWAY TELESCOPIC

TPR 576

Standard specification, galvanised steel & polyester powder coated finish black or yellow

Lifting weight: 7kg

OPTIONS:

Other BS / RAL colours

ROUND TELESCOPIC

TPR 700

Standard specification, galvanised steel

Lifting weight: 12kg

TPR 800

Anti-ram raid specification, galvanised steel

Lifting weight: 14kg

TPR 390

Anti-ram raid specification, stainless steel in satin finish

Lifting weight: 13kg

LRG ROUND TELESCOPIC

TPR 600

Standard specification, galvanised steel

Lifting weight: 17kg

OPTIONS:

Polyester powder coated

TPR 300

Standard specification, stainless steel in satin finish

Lifting weight: 13kg

SQUARE TELESCOPIC

TPS 700

Standard specification, galvanised steel

Lifting weight: 13kg

OPTIONS:

Polyester powder coated

TPS 800

Anti-ram raid specification, galvanised steel

Lifting weight: 15kg

OPTIONS:

Polyester powder coated

BURY - PU TELESCOPIC

TPB 725

Anti-ram raid specification Polyurethane elastomer outer over steel core in two-pack polyurethane coated finish Galvanised steel socket

Lifting weight: 18kg

OPTIONS:

Fixed bollard

CAR PARK POSTS & TELESCOPIC BOLLARDS



View or download other product e-brochures at the following link:

www.furnitubes.com/brochures



© Furnitubes 2018

 **Furnitubes®**

3rd Floor, Meridian House, Royal Hill, Greenwich

LONDON SE10 8RD

T: +44 (0)20 8378 3200

F: +44 (0)20 8378 3250

sales@furnitubes.com

www.furnitubes.com