

LINEA PLUS

SLIM LINE & POWERFUL

- A Jaga classic with timeless design, the first award winning radiator ever !
- Discreet, slim-line design with perforated and curved grille
- Clean and simple, flat front panel.
- Partially pre-assembled for quick installation
- Low-H₂O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission
- Twin Power for better compensation of the downward cold air flow next to glazed façades or ventilation grilles
- DBE model for super-low water temperatures from 28°C
- Suitable for an integrated valve and concealed connection
- Safe surface temperature




PRESENTING LINEA PLUS



CREATE
EMOTION

LINEA PLUS

DIMENSIONS (in mm)

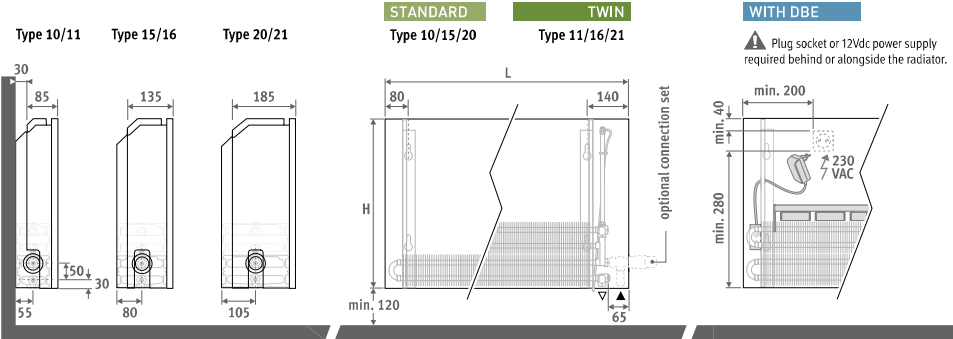

DELIVERY

Product is made to order, please contact our customer service team on 01531 631 533 to discuss your requirements.

COLOURS

Environmentally friendly, scratch-resistant, high UV resistant powder coating.

Standard colours:

- traffic white RAL 9016 (133), soft touch lightly structured satin lacquer
- sandblast grey (001), fine texture metallic lacquer

Other colours: see colour chart.

CONNECTION

Standard connection:

Bottom end left or right, to the wall or to the floor. Connection to the wall via the bottom of the casing, or totally concealed within the casing, depending on the valve or connection set chosen.

Optional high level valve:

add to the code of the radiator /30 (left) or /60 (right)

Ex. LINW.035 050 10.xxx/60



Optional remote controlled valve:

add to the code of the radiator /00.

Ex. LINW.035 050 10.xxx/00

VALVES

See page 96.

ORDERING CODE

code height length type colour
LINW . 020 050 10 . XXX
fill in colour code

ORDERING CODE WITH DBE


code height length type colour Option
LINW . 020 060 06 . XXX /DBE
fill in colour code

DBE should be selected according to the power in comfort mode, as stated in the output table. The transition between standby (inactive) and comfort is managed automatically depending on the measured temperature and settings. For output in boost mode: see www.jaga.co.uk




TOWEL RAILS

Chrome-plated alu.



Chrome-plated alu.	L
5501.001	560
5501.002	660

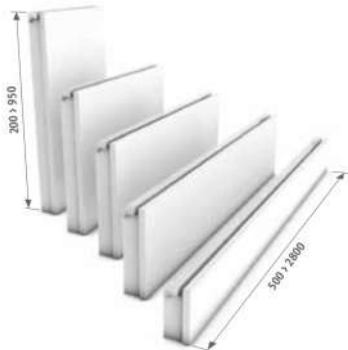

Also available as freestanding model for glazed façades. See page 66.



HEIGHT 200 - OUTPUT TABLES

LINW.020 LLL TT.XXX

LINW.020 LLL TT.XXX/DBE

L mm	STANDARD			TWIN			WITH DBE			
	Type	Watts	Watts	Type	Watts	Watts	Type	Watts	Watts	Watts
		75/65	55/45		75/65	55/45		75/65	55/45	35/30
500	10	284	136	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	15	519	251	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	20	697	337	N/A	N/A	N/A	N/A	N/A	N/A	N/A
600	10	341	164	N/A	N/A	N/A	10	491	295	123
	15	623	301	N/A	N/A	N/A	15	873	524	218
	20	836	404	N/A	N/A	N/A	20	1086	652	272
700	10	398	191	N/A	N/A	N/A	10	548	329	137
	15	727	351	N/A	N/A	N/A	15	977	586	244
	20	976	471	N/A	N/A	N/A	20	1226	736	307
800	10	454	218	N/A	N/A	N/A	10	604	362	151
	15	830	401	N/A	N/A	N/A	15	1080	648	270
	20	1115	538	N/A	N/A	N/A	20	1365	819	341
900	10	511	245	N/A	N/A	N/A	10	811	487	203
	15	934	451	N/A	N/A	N/A	15	1434	860	359
	20	1255	606	N/A	N/A	N/A	20	1755	1053	439
1000	10	568	273	N/A	N/A	N/A	10	868	521	217
	15	1038	502	N/A	N/A	N/A	15	1538	923	385
	20	1394	673	N/A	N/A	N/A	20	1894	1136	474
1100	10	625	300	N/A	N/A	N/A	10	925	555	231
	15	1142	552	N/A	N/A	N/A	15	1642	985	411
	20	1533	740	N/A	N/A	N/A	20	2033	1220	508
1200	10	682	327	N/A	N/A	N/A	10	982	589	246
	15	1246	602	N/A	N/A	N/A	15	1746	1048	437
	20	1673	808	N/A	N/A	N/A	20	2173	1304	543
1400	10	795	382	N/A	N/A	N/A	10	1095	657	274
	15	1453	702	N/A	N/A	N/A	15	1953	1172	488
	20	1952	943	N/A	N/A	N/A	20	2452	1471	613
1600	10	909	437	N/A	N/A	N/A	10	1509	905	377
	15	1661	803	N/A	N/A	N/A	15	2661	1597	665
	20	2230	1077	N/A	N/A	N/A	20	3230	1938	808
1800	10	1022	491	N/A	N/A	N/A	10	1622	973	406
	15	1868	903	N/A	N/A	N/A	15	2868	1721	717
	20	2509	1212	N/A	N/A	N/A	20	3509	2105	877
2000	10	1136	546	N/A	N/A	N/A	10	1736	1042	434
	15	2076	1003	N/A	N/A	N/A	15	3076	1846	769
	20	2788	1346	N/A	N/A	N/A	20	3788	2273	947
2200	10	1250	600	N/A	N/A	N/A	10	1850	1110	463
	15	2284	1104	N/A	N/A	N/A	15	3284	1970	821
	20	3067	1481	N/A	N/A	N/A	20	4067	2440	1017
2400	10	1363	655	N/A	N/A	N/A	10	2263	1358	566
	15	2491	1204	N/A	N/A	N/A	15	3991	2395	998
	20	3346	1616	N/A	N/A	N/A	20	4846	2908	1212
2600	10	1477	709	N/A	N/A	N/A	10	2377	1426	594
	15	2699	1304	N/A	N/A	N/A	15	4199	2519	1050
	20	3624	1750	N/A	N/A	N/A	20	5124	3074	1281
2800	10	1590	764	N/A	N/A	N/A	10	2490	1494	623
	15	2906	1404	N/A	N/A	N/A	15	4406	2644	1102
	20	3903	1885	N/A	N/A	N/A	20	5403	3242	1351

EN442 output at 20°C room temperature

HEIGHT 350 - OUTPUT TABLES

LINW.035 LLL TT.XXX						
	STANDARD			TWIN		
L	Type	Watts	Watts	Type	Watts	Watts
mm		75/65	55/45		75/65	55/45
500	10	393	190	11	549	260
	15	659	323	16	813	385
	20	901	441	21	1039	488
600	10	471	228	11	659	313
	15	790	387	16	975	461
	20	1081	529	21	1247	585
700	10	550	266	11	769	365
	15	922	451	16	1138	538
	20	1261	617	21	1455	683
800	10	628	304	11	878	416
	15	1054	516	16	1300	615
	20	1441	705	21	1662	780
900	10	707	342	11	988	469
	15	1185	580	16	1463	692
	20	1621	793	21	1870	878
1000	10	785	380	11	1098	521
	15	1317	645	16	1625	769
	20	1801	881	21	2078	975
1100	10	864	419	11	1208	573
	15	1449	709	16	1788	846
	20	1981	969	21	2286	1073
1200	10	942	456	11	1318	625
	15	1580	774	16	1950	923
	20	2161	1058	21	2494	1170
1400	10	1099	532	11	1537	729
	15	1844	903	16	2275	1076
	20	2521	1234	21	2909	1365
1600	10	1256	608	11	1757	833
	15	2107	1032	16	2600	1230
	20	2882	1410	21	3325	1560
1800	10	1413	684	11	1976	937
	15	2371	1161	16	2925	1384
	20	3242	1587	21	3740	1755
2000	10	1570	760	11	2196	1042
	15	2634	1290	16	3250	1538
	20	3602	1763	21	4156	1950
2200	10	1727	837	11	2416	1146
	15	2897	1418	16	3575	1691
	20	3962	1939	21	4572	2146
2400	10	1884	913	11	2635	1250
	15	3161	1548	16	3900	1845
	20	4322	2115	21	4987	2340
2600	10	2041	989	11	2855	1354
	15	3424	1676	16	4225	1999
	20	4683	2292	21	5403	2536
2800	10	2198	1065	11	3074	1458
	15	3688	1806	16	4550	2153
	20	5043	2468	21	5818	2730

LINW.035 LLL TT.XXX/DBE				
WITH DBE				
Type	Watts	Watts	Watts	
	75/65	55/45	35/30	
N/A	N/A	N/A	N/A	
N/A	N/A	N/A	N/A	
N/A	N/A	N/A	N/A	
11	959	575	240	
16	1455	873	364	
21	1727	1036	432	
11	1069	641	267	
16	1618	971	405	
21	1935	1161	484	
11	1178	707	295	
16	1780	1068	445	
21	2142	1285	536	
11	1588	953	397	
16	2423	1454	606	
21	2830	1698	708	
11	1698	1019	425	
16	2585	1551	646	
21	3038	1823	760	
11	1808	1085	452	
16	2748	1649	687	
21	3246	1948	812	
11	1918	1151	480	
16	2910	1746	728	
21	3454	2072	864	
11	2137	1282	534	
16	3235	1941	809	
21	3869	2321	967	
11	2957	1774	739	
16	4520	2712	1130	
21	5245	3147	1311	
11	3176	1906	794	
16	4845	2907	1211	
21	5660	3396	1415	
11	3396	2038	849	
16	5170	3102	1293	
21	6076	3646	1519	
11	3616	2170	904	
16	5495	3297	1374	
21	6492	3895	1623	
11	4435	2661	1109	
16	6780	4068	1695	
21	7867	4720	1967	
11	4655	2793	1164	
16	7105	4263	1776	
21	8283	4970	2071	
11	4874	2924	1219	
16	7430	4458	1858	
21	8698	5219	2175	

EN442 output at 20°C room temperature

HEIGHT 500 - OUTPUT TABLES

LINW.050 LLL TT.XXX						
	STANDARD			TWIN		
L	Type	Watts	Watts	Type	Watts	Watts
mm		75/65	55/45		75/65	55/45
500	10	482	236	11	655	311
	15	767	381	16	976	462
	20	1060	526	21	1282	600
600	10	578	282	11	785	373
	15	920	456	16	1171	555
	20	1272	631	21	1538	720
700	10	675	330	11	916	436
	15	1073	532	16	1366	647
	20	1484	736	21	1795	840
800	10	771	377	11	1047	498
	15	1226	608	16	1561	739
	20	1696	841	21	2051	960
900	10	868	424	11	1178	560
	15	1380	685	16	1756	832
	20	1908	946	21	2308	1080
1000	10	964	471	11	1309	623
	15	1533	761	16	1951	924
	20	2120	1051	21	2564	1200
1100	10	1060	518	11	1440	685
	15	1686	837	16	2146	1016
	20	2332	1156	21	2820	1320
1200	10	1157	565	11	1571	747
	15	1840	913	16	2341	1109
	20	2544	1262	21	3077	1440
1400	10	1350	660	11	1833	872
	15	2146	1065	16	2731	1293
	20	2968	1472	21	3590	1680
1600	10	1542	753	11	2094	996
	15	2453	1217	16	3122	1479
	20	3392	1682	21	4102	1920
1800	10	1735	848	11	2356	1120
	15	2759	1369	16	3512	1663
	20	3816	1892	21	4615	2160
2000	10	1928	942	11	2618	1245
	15	3066	1521	16	3902	1848
	20	4240	2103	21	5128	2400
2200	10	2121	1036	11	2880	1370
	15	3373	1674	16	4292	2033
	20	4664	2313	21	5641	2641
2400	10	2314	1131	11	3142	1494
	15	3679	1825	16	4682	2218
	20	5088	2523	21	6154	2881
2600	10	2506	1224	11	3403	1618
	15	3986	1978	16	5073	2403
	20	5512	2733	21	6666	3120
2800	10	2699	1319	11	3665	1743
	15	4292	2130	16	5463	2587
	20	5936	2944	21	7179	3360

LINW.050 LLL TT.XXX/DBE				
WITH DBE				
Type	Watts	Watts	Watts	
	75/65	55/45	35/30	
N/A	N/A	N/A	N/A	
N/A	N/A	N/A	N/A	
N/A	N/A	N/A	N/A	
11	1085	651	271	
16	1651	991	413	
21	2018	1211	505	
11	1216	730	304	
16	1846	1108	462	
21	2275	1365	569	
11	1347	808	337	
16	2041	1225	510	
21	2531	1519	633	
11	1778	1067	445	
16	2716	1630	679	
21	3268	1961	817	
11	1909	1145	477	
16	2911	1747	728	
21	3524	2114	881	
11	2040	1224	510	
16	3106	1864	777	
21	3780	2268	945	
11	2171	1303	543	
16	3301	1981	825	
21	4037	2422	1009	
11	2433	1460	608	
16	3691	2215	923	
21	4550	2730	1138	
11	3294	1976	824	
16	5042	3025	1261	
21	6022	3613	1506	
11	3556	2134	889	
16	5432	3259	1358	
21	6535	3921	1634	
11	3818	2291	955	
16	5822	3493	1456	
21	7048	4229	1762	
11	4080	2448	1020	
16	6212	3727	1553	
21	7561	4537	1890	
11	4942	2965	1236	
16	7562	4537	1891	
21	9034	5420	2259	
11	5203	3122	1301	
16	7953	4772	1988	
21	9546	5728	2387	
11	5465	3279	1366	
16	8343	5006	2086	
21	10059	6035	2515	

EN442 output at 20°C room temperature

HEIGHT 650 - OUTPUT TABLES

LINW.065 LLL TT.XXX						
L mm	STANDARD			TWIN		
	Type	Watts	Watts	Type	Watts	Watts
		75/65	55/45		75/65	55/45
500	10	561	277	11	742	354
	15	858	432	16	1114	528
	20	1196	601	21	1503	702
600	10	673	332	11	890	424
	15	1029	518	16	1336	634
	20	1435	721	21	1803	842
700	10	785	387	11	1038	495
	15	1201	604	16	1559	740
	20	1674	841	21	2104	983
800	10	897	442	11	1186	565
	15	1372	690	16	1782	845
	20	1913	961	21	2404	1123
900	10	1009	497	11	1335	637
	15	1544	777	16	2004	951
	20	2152	1081	21	2705	1264
1000	10	1121	553	11	1483	707
	15	1715	863	16	2227	1056
	20	2391	1201	21	3005	1404
1100	10	1233	608	11	1631	778
	15	1887	949	16	2450	1162
	20	2630	1321	21	3306	1544
1200	10	1345	663	11	1780	849
	15	2058	1035	16	2672	1267
	20	2869	1441	21	3606	1685
1400	10	1569	773	11	2076	990
	15	2401	1208	16	3118	1479
	20	3347	1681	21	4207	1965
1600	10	1794	884	11	2373	1131
	15	2744	1380	16	3563	1690
	20	3826	1922	21	4808	2246
1800	10	2018	995	11	2669	1273
	15	3087	1553	16	4009	1902
	20	4304	2162	21	5409	2527
2000	10	2242	1105	11	2966	1414
	15	3430	1725	16	4454	2113
	20	4782	2402	21	6010	2808
2200	10	2466	1215	11	3263	1556
	15	3773	1898	16	4899	2324
	20	5260	2642	21	6611	3088
2400	10	2690	1326	11	3559	1697
	15	4116	2071	16	5345	2535
	20	5738	2882	21	7212	3369
2600	10	2915	1437	11	3856	1838
	15	4459	2243	16	5790	2746
	20	6217	3123	21	7813	3650
2800	10	3139	1547	11	4152	1980
	15	4802	2416	16	6236	2958
	20	6695	3363	21	8414	3931

LINW.065 LLL TT.XXX/DBE				
WITH DBE				
Type	Watts	Watts	Watts	
	75/65	55/45	35/30	
N/A	N/A	N/A	N/A	
N/A	N/A	N/A	N/A	
N/A	N/A	N/A	N/A	
11	1190	714	298	
16	1816	1090	454	
21	2283	1370	571	
11	1338	803	335	
16	2039	1223	510	
21	2584	1550	646	
11	1486	892	372	
16	2262	1357	566	
21	2884	1730	721	
11	1935	1161	484	
16	2964	1778	741	
21	3665	2199	916	
11	2083	1250	521	
16	3187	1912	797	
21	3965	2379	991	
11	2231	1339	558	
16	3410	2046	853	
21	4266	2560	1067	
11	2380	1428	595	
16	3632	2179	908	
21	4566	2740	1142	
11	2676	1606	669	
16	4078	2447	1020	
21	5167	3100	1292	
11	3573	2144	893	
16	5483	3290	1371	
21	6728	4037	1682	
11	3869	2321	967	
16	5929	3557	1482	
21	7329	4397	1832	
11	4166	2500	1042	
16	6374	3824	1594	
21	7930	4758	1983	
11	4463	2678	1116	
16	6819	4091	1705	
21	8531	5119	2133	
11	5359	3215	1340	
16	8225	4935	2056	
21	10092	6055	2523	
11	5656	3394	1414	
16	8670	5202	2168	
21	10693	6416	2673	
11	5952	3571	1488	
16	9116	5470	2279	
21	11294	6776	2824	

EN442 output at 20°C room temperature

HEIGHT 950 - OUTPUT TABLES

LINW.095 LLL TT.XXX						
L mm	STANDARD			TWIN		
	Type	Watts	Watts	Type	Watts	Watts
		75/65	55/45		75/65	55/45
500	N/A	N/A	N/A	N/A	N/A	N/A
	N/A	N/A	N/A	N/A	N/A	N/A
	N/A	N/A	N/A	N/A	N/A	N/A
600	10	838	420	11	1055	505
	15	1210	625	16	1608	765
	20	1706	880	21	2290	1065
700	10	977	490	11	1231	590
	15	1411	729	16	1876	892
	20	1991	1027	21	2671	1242
800	10	1117	560	11	1406	673
	15	1613	833	16	2144	1020
	20	2275	1173	21	3053	1420
900	10	1256	630	11	1582	758
	15	1814	937	16	2412	1147
	20	2560	1320	21	3434	1597
1000	10	1396	700	11	1758	842
	15	2016	1041	16	2680	1275
	20	2844	1467	21	3816	1774
1100	10	1536	771	11	1934	926
	15	2218	1146	16	2948	1402
	20	3128	1613	21	4198	1952
1200	10	1675	840	11	2110	1011
	15	2419	1250	16	3216	1529
	20	3413	1760	21	4579	2129
1400	10	1954	980	11	2461	1179
	15	2822	1458	16	3752	1784
	20	3982	2054	21	5342	2484

LINW.095 LLL TT.XXX/DBE				
WITH DBE				
Type	Watts	Watts	Watts	
	75/65	55/45	35/30	
N/A	N/A	N/A	N/A	
N/A	N/A	N/A	N/A	
N/A	N/A	N/A	N/A	
11	1355	813	339	
16	2088	1253	522	
21	2770	1662	693	
11	1531	919	383	
16	2356	1414	589	
21	3151	1891	788	
11	1706	1024	427	
16	2624	1574	656	
21	3533	2120	883	
11	2182	1309	546	
16	3372	2023	843	
21	4394	2636	1099	
11	2358	1415	590	
16	3640	2184	910	
21	4776	2866	1194	
11	2534	1520	634	
16	3908	2345	977	
21	5158	3095	1290	
11	2710	1626	678	
16	4176	2506	1044	
21	5539	3323	1385	
11	3061	1837	765	
16	4712	2827	1178	
21	6302	3781	1576	

EN442 output at 20°C room temperature