

**USER-FRIENDLY &
MAXIMUM COMFORT**

CONFORT 125 SLIDER The Ultimate Slider

 **75mm System**



By  Hydro





CONFORT 125

/ SLIDING AND LIFT-SLIDE DOORS AT MAXIMUM COMFORT

Confort 125 is a thermally insulated sliding and lift-sliding system that is durable, stable and robust. The system is available in a 1, 2 and 3 rail version, so a 6-leaf sliding door is perfectly feasible. With a maximum vent weight of 240 kg for the sliding and 300 kg for the lift-sliding version, large glazed areas are easily attainable.

STRENGTH AND DURABILITY

- A combination of strong profiles and stainless steel rollers with polyamide support, allows Confort 125 to be used for glazed areas up to 2.5 m (height) for the sliding version.
- The stainless steel rollers are self-levelling which assures that the vent glides effortlessly, even up to a maximum vent weight of 240 kg. Stainless steel wheels do not deform and so guarantee a long-life performance.
- The lift-slide hardware allows vents up to 300 kg with glazed areas up to 2.8 m.
- The vent profiles with a building depth of 50 mm accommodate glazing from 4 to 35,5 mm.
- Confort 125 sliding doors are compatible with other Technal products such as our conservatory, turning and curtain wall systems.






DESIGN

- The gutter section frame allows the internal floor finishes to be flush with the inner frame and avoids thresholds.
- All standard shades and ventilation systems can easily be integrated.
- A comprehensive range of supplementary profiles allows the fenestration to be integrated perfectly into the building.
- Design glazing beads add extra finish.
- Specially designed end pieces make Confort 125 complete in all respects.
- Confort 125 is available in 1-, 2-, 3-rail, each offering specific advantages and design solutions:
- Confort 125, 1-rail: Combination of a sliding vent and a fixed screen, which can also include turning vents. Fixed screens can be integrated on top or at the sides of the sliding vent by using an integrated combination profile. Possibility to have the vent on the outside or on the inside.
- Confort 125, 2-rail: Combination of sliding vents with 1, 2, 3 or 4 vents; fixed and sliding parts have the same sightline.
- Confort 125, 3-rail: Combination of sliding vents with 3-rail frame, max. 6 vents. The perfect solution for larger glass surfaces.


SAFETY

- Multipoint security locks can be applied on the sliding and lift-sliding version.
- The lock of the vent has an anti-lift device. Moreover, a central security piece on top of the vent prevents lifting.
- Internal tubular glazing beads prevent unclipping of the glazing beads from the outside.
- The lock of Confort 125 can include a night vent position, which assures a healthy ventilation of the building.
- Burglary resistance: Class 2 (EN 1627-1630)
- Impact test: Class 5 (EN 13049)

CONFORT 125 SLIDE VERSION

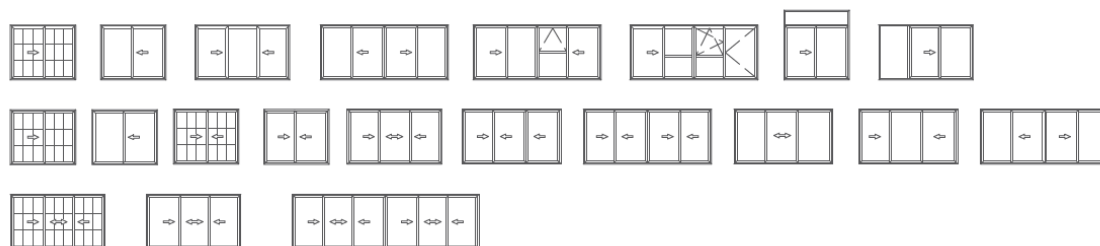

CONFORT 125 LIFT-SLIDE VERSION

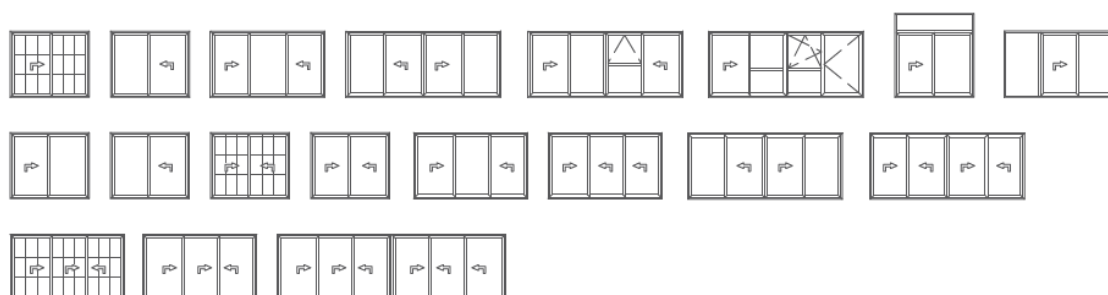



CONFORT 125

RESISTANCE

- Efficient water evacuation is ensured via punched drain holes and integrated sealing plugs.
- Hi-Fin brush gaskets ensure perfect weather resistance in the sliding version.
- For the lift-slide version, EPDM gaskets guarantee perfect tightness.
- Brush draught excluders, positioned centrally between each vent, keep the sliding doors draught free.
- The glass fibre reinforced polyamide strips (PA 6.6 GF25) ensure good thermal insulation. The synthetic protection gutter offers an increased thermal protection.
- Special profile for bi-metal solution.



FABRICATION

- Both frames and vents are assembled using eccentric or press corners. Corner chevrons guarantee a perfect alignment of the corners.
- All profiles are prefabricated using the specially designed punching tools. Drainage holes, vent cut outs and the holes punched for the eccentric cleats are therefore very precise, ensuring fast and accurate assembly.
- Fabrication manuals and precise software give the fabricator the information he requires to proceed swiftly.
- Confort 125 is complementary with the turning system Avantis. As a result, cutting losses are limited and identical vent profiles, glazing beads and glazing gaskets can be used for sliding and turning applications.
- Both sliding and lift-sliding versions use identical frame profiles, rails, glazing gaskets and sealing pieces, which proves the optimal use of materials.
- Technal offers its software Techdesign, an open concept for automation, to fabricators who have a CNC machining center.



MAINTENANCE

- All Technal System profiles can be easily cleaned.
- Aluminium does not rust, rot or tear and the shape does not deform.
- Aluminium is a green product. It can be recycled infinitely without quality loss.

FINISHES

- Over 400 powder coated paint colours in matt, gloss or satin.
- Unique wood effect, textured and textured metallic ranges are available.
- Anodised finish is also an option.
- Accessories can be supplied in corresponding colours to match the profiles.
- Polyamide thermal breaks allow bi-colour finishes, so that the exterior design requirements do not infringe the interior design requests.
- Our surface finishes meet the highest standards of Qualicoat or Qualanod.

PROJECT SUPPORT

- Technal's experienced project team will advise you on the best product solutions.
- We can help you with pricing, strength calculations, building connections, thermal simulations, etc.
- Specific project solutions can be developed.
- Samples, catalogues, technical specifications and digital drawings are available.



CONFORT 125

/ CHARACTERISTICS AND PERFORMANCES

DIMENSIONS	
Min sightline fixed part 1-rail	50 mm
Min sightline sliding part 1-rail	131 mm
Min sightline sliding part 2-rail and 3-rail	131 mm
Min sightline transom in vent	72 mm
Profile depth 1-rail	117,5 mm
Profile depth 2-rail	110,5 / 125 mm
Profile depth 3-rail	192,5 mm
Profile depth vent	50 mm







GLAZING	
Infill thickness fixed parts 1-rail	4 - 35,5 mm
Infill thickness sliding parts 1-, 2-, 3-rail	4 - 35,5 mm
Glazing method	dry glazed with EPDM gaskets or silicon

	AIR PERMEABILITY	WATER TIGHTNESS	WIND RESISTANCE
SLIDING VERSION	Class 4 600 Pa	Class 7a 300 Pa	Class 4 1600 2400 SEC
LIFT-SLIDE VERSION	Class 4 600 Pa	Class 8a 450 Pa	Class 3 1200 SEC 2000

ACCOUSTIC INSULATION	38 (-1;-2) dB (6/16/44.2)	41 (-1;3) dB (44.2/15/55.2A)	41 (-1;-3) dB (12/12/44.4A)
----------------------	---------------------------	------------------------------	-----------------------------

SECURITY TESTS	Class 2 (ENV1627-1630)	Class 5 (EN 13049)
----------------	------------------------	--------------------

CONFORT 125

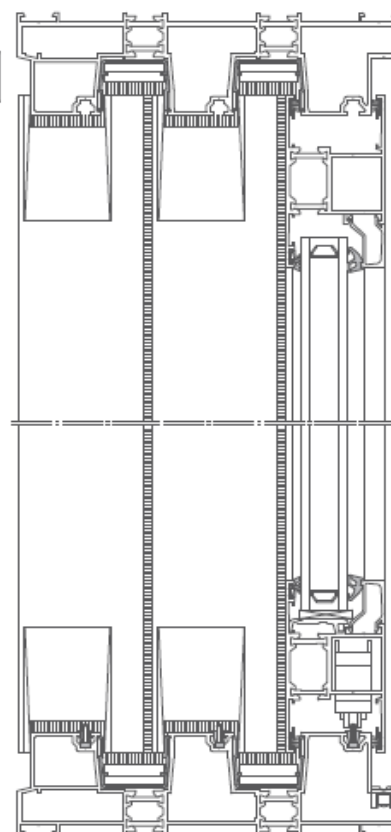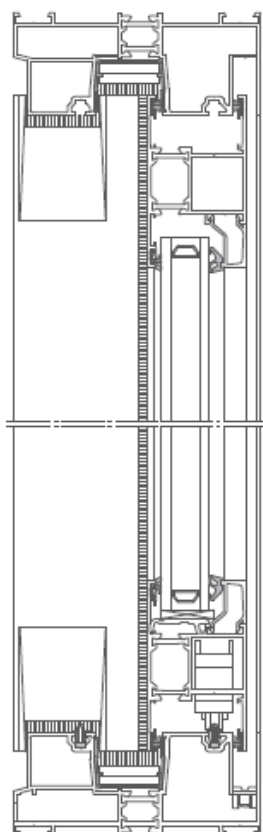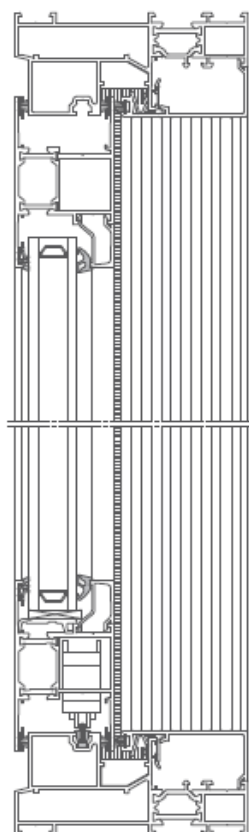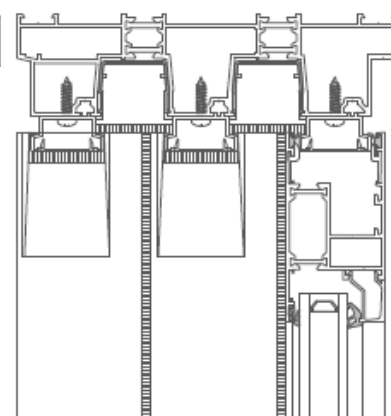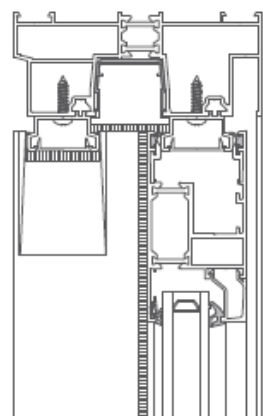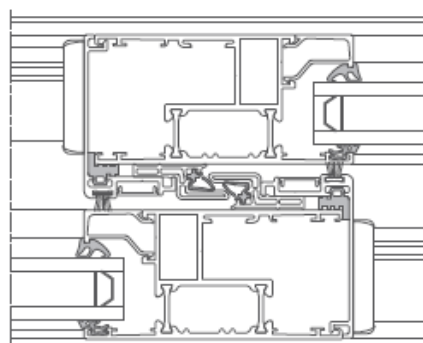

CONFORT 125 SLIDER

/ COMMITMENT TO SUSTAINABILITY

TECHNAL demonstrates its strong commitment to the environment in all areas: by using recycled and low-carbon materials, with a product design that is adapted to a circular economy, and produced within a responsible supply chain. In addition, these statements are certified by external organisations to ensure maximum transparency.

HYDRO CIRCAL®

We are demonstrating our focus on sustainability by using Hydro CIRCAL® for our system solutions, one of the most sustainable aluminium alloys in our sector. Hydro CIRCAL® is a range of prime quality aluminium made with a minimum of 75% recycled end-of-life aluminium (post-consumer scrap). The production process is verified by an independent third party (DNV-GL), and confirmed by an EPD (Environmental Product Declaration). Hydro CIRCAL® also has **one of the smallest CO₂ footprint worldwide: 1.9 kg CO₂ per kilo of aluminium** – 4.5 times less than the world global primary average.



75%

**RECYCLED
POST
CONSUMER**

Hydro CIRCAL® is the world's first certified recycled aluminium which means that at least 75% of the prime-quality aluminium alloy comes from post-consumer materials.



95%

**ENERGY
SAVED**

By recycling post-consumer scrap aluminium, the remelting process saves up to 95% of energy that would normally be spent and maintain the same high quality as primary aluminium.



85%

**REDUCTION
OF CO₂
EMISSIONS**

The consequence of using Hydro CIRCAL® is the drastic reduction in CO₂ emissions which sums more than 85% when compared with the global average for primary aluminium production.



IMAGINE WHAT'S NEXT

Head Office
Severn Drive, Tewkesbury
Gloucestershire
GL20 8SF

Tel +44 1684 853500

Northern Office
Cedar Court Office Park,
Denby Dale Road, Wakefield
WF4 3FU

info.uk@hydro.com

London Office
The Building Centre
26 Store Street, London
WC1E 7BT

www.technal.co.uk

