


Open Platform Lift

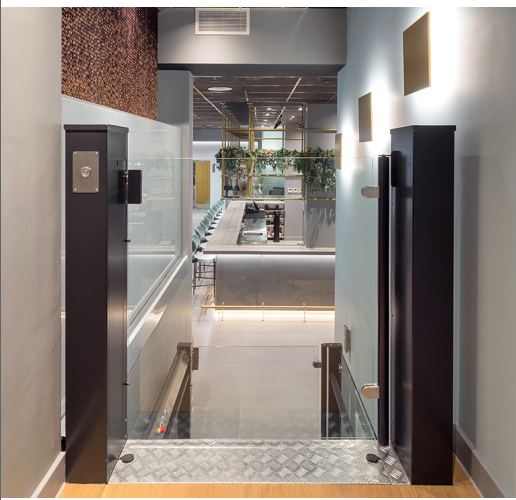

Part M Compliant Platform Lift (certified to EN81-41)

Our open style Platform Lift can accommodate changes in level from 600mm up to 3000mm. It provides an alternative solution to a fully enclosed platform lift. This stylish low-rise lift is suitable for indoor or outdoor environments. It has been specifically designed for applications with little or no alterations to existing buildings.

Open Platform Lift

Standard Features

Handrail on both sides
Manually operated gates
Emergency stop
Overload detector
Electronic speed control
Safety edge all around the underside of the platform
On board ramp integrated into platform
Platform Controls: Integrated onto lift platform handrail
Upper call station : Integrated into guide rails
Lower call station: Post or wall mounted (standard)
UPS battery backup

Optional Features

Automatic operated gates
Auto-dialler on platform
Full Braille controls
External installation (corrosion resistant)
Pit mounted (flush platform)
Chequer plate flooring

Specifications

Drive	Belt Driven
Capacity	400kg
Speed	0.15m/s
Travel	600mm min – 3000mm max (2 stops)

SPACE REQUIREMENT / FLOOR APERTURE

Pit	No pit required
-----	-----------------

SIZES (bespoke sizes available)

Platform	Space requirement
1000 mm x 1400mm	1201mm x 1760mm
1100 mm x 1400mm	1301mm x 1760mm

LIFT ENCLOSURE

Finishes:	Fully glazed platform surround with powder coated frame
-----------	---

LIFTING PLATFORM

Finishes:	RAL 9006 – White Aluminium (standard) Any four digit RAL colour on request
Flooring:	Standard - Grey rubber stud (internal) Standard - chequer plate (external)

DOORS/GATES

Finishes	RAL 9006 - Powder coated (standard) Stainless steel framed fully glazed (optional)
----------	---

ELECTRICAL DETAILS / POWER REQUIREMENT

Supply:	240v, 1 phase, 16A, 50 Hz (standard)
---------	--------------------------------------