



altro

the future is safer with altro

**NEW**  
Xtreme heavy  
duty collection,  
plus PUR

# The Xtreme heavy duty collection

Altro Unity 25, Altro Designer 25 / D25, Altro Classic 25 / X25, Altro Atlas 40 / X40

Safety flooring / Suelos de Seguridad / Sicherheitsbodenbelag





altro


the future is safer with altro

# Altro Unity™ 25 Patent No. 2 462 167


R10




Vault UBI2517  
WR277 / A1M100 / LRV 5

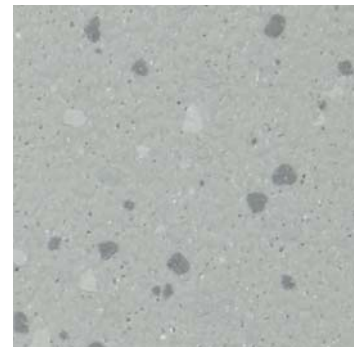


Streetlight UBI2505  
WR287 / A1M79 / LRV 45

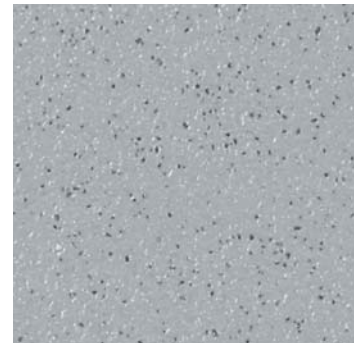

Temple UB2509  
WR261 / A1M81 / LRV 27



Rock UBI2504  
WR84 / A1M84 / LRV 23



Pavement UBI2507  
WR83 / A1M83 / LRV 14




Runway UB2506  
WR72 / A1M72 / LRV 9

Light Reflectance Values (LRVs) measured in accordance with BS8493:2008


Exact material match with samples cannot be guaranteed.

No podemos garantizar que el material del suelo de seguridad coincida exactamente con el de las muestras.


Eine exakte Übereinstimmung des Materials mit Mustern kann nicht garantiert werden.




Ice Rink UBI2514  
WR291 / A1M01 / LRV 70




Statue UBI2513  
WR304 / A1M12 / LRV 62

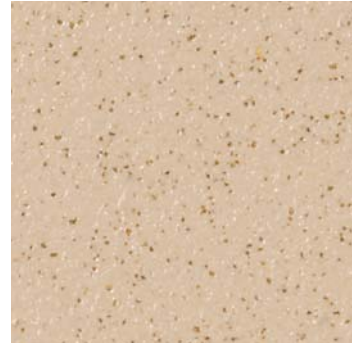


Arena UB2510  
WR297 / A1M20 / LRV 41




Gallery UB2511  
WR62 / A1M62 / LRV 10




Plaza UBI2512  
WR27 / A1M27 / LRV 32

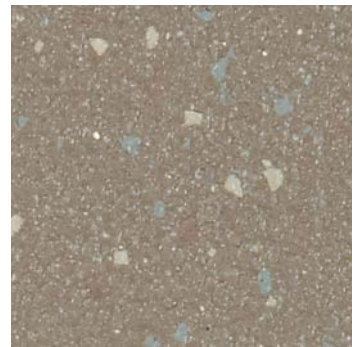


Monument UBI2508  
WR305 / A1M239 / LRV 23




Signal UBI2516  
WR300 / A1M42 / LRV 13




Forge UB2515  
WR248 / A1M238 / LRV 9

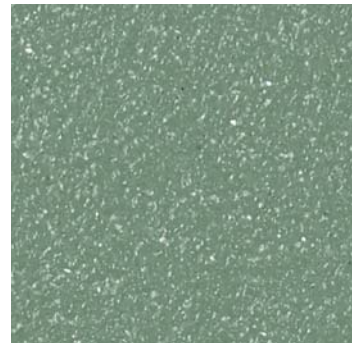


Roof Garden UB2500  
WR262 / A1M154 / LRV 23



Pool UBI2503  
WR307 / A1M73 / LRV 10



Fountain UBI2502  
WR306 / A1M71 / LRV 22

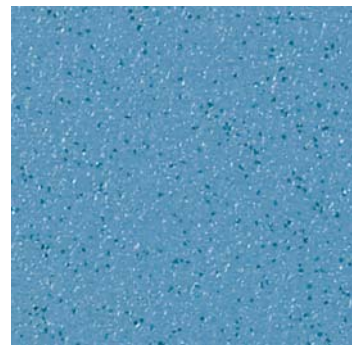


Stream UB2501  
WR288 / A1M71 / LRV 22


## Altro Designer™ 25/D25

R10


Altro Legend Range




Storm D25903  
WR82 / A1M82 / LRV 16



Fog D25153  
WR81 / A1M81 / LRV 27




Twilight D25910  
WR39 / A1M34 / LRV 8




Midnight D25421  
WR72 / A1M72 / LRV 11




Jet D2501  
WR100 / A1M100 / LRV 6




Skyline D25332  
WR52 / A1M52 / LRV 25



Biscuit D25904  
WR146 / A1M20 / LRV 30



Bone D25215  
WR20 / A1M20 / LRV 37




Rust D25907  
WR150 / A1M238 / LRV 10

## Altro Classic™ 25/X25

Altro Classic 25/X25 is also available in Anvil, as shown in Altro Atlas 40/X40\*.

R11


Altro Legend Range




Pewter Grey\*  
X2539R11/X4039  
WR81 / A1M81 / LRV 26



Blue  
X2541R11  
WR71 / A1M71 / LRV 20



Mushroom\*  
X2542R11/X4042  
WR24 / A1M27 / LRV 32



Quarry Red \*  
X2560R11/X4060  
WR42 / A1M42 / LRV 13



Walnut\*  
X2586R11/X4086  
WR62 / A1M62 / LRV 10

## Altro Atlas™ 40/X40

Available in Anvil and the 4 colours shown in Classic 25/X25\*.


R10



Anvil\*  
X4094/X2594R11  
WR101 / A1M72 / LRV 11

**Contains bio-plasticiser** - from a renewable resource,  
for more information visit [www.altro.com/6steps](http://www.altro.com/6steps).

A+BRE Generic Green Guide Rating for safety flooring,  
full details available at [www.thegreenguide.co.uk](http://www.thegreenguide.co.uk).

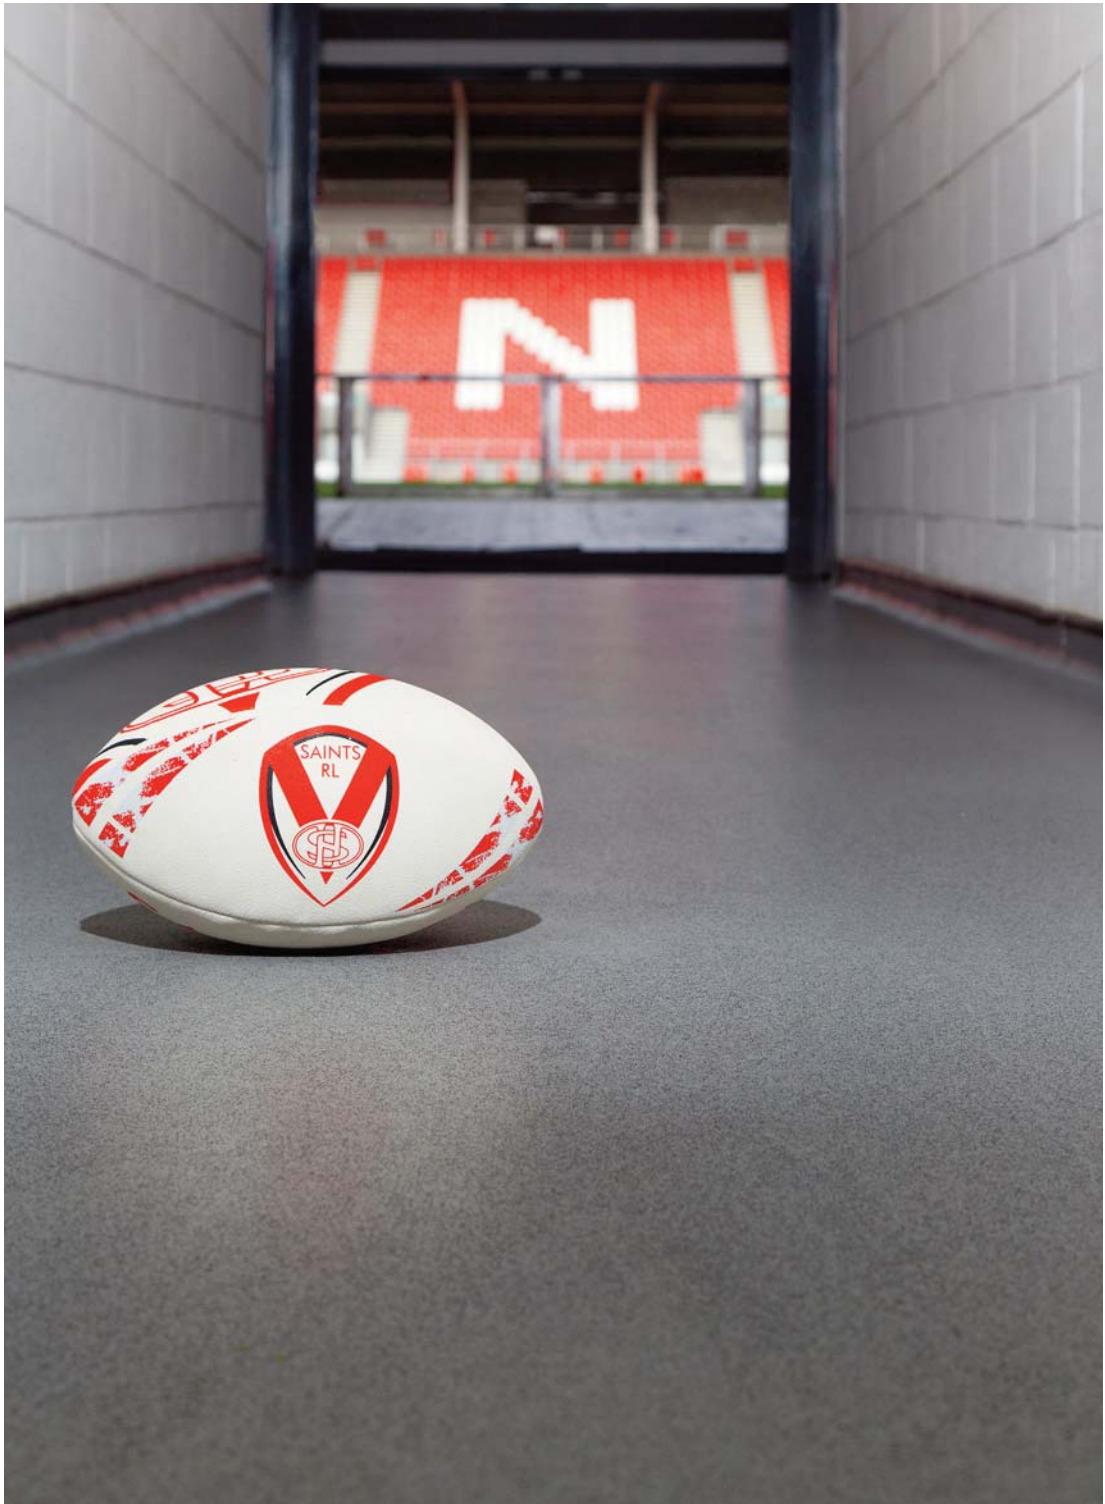

# Altro Unity™ 25, Altro Designer™ 25 / D25, Altro Classic™ 25 / X25, Altro Atlas™ 40 / X40 safety flooring

Flooring Type Tipo de pavimento Belagsart		EN 13845/ EN 13553	Safety flooring Suelo de seguridad antideslizante Sicherheitsbodenbelag			
Classification for use Areas de uso Einsatzbereiche		EN 685	34 & 43 34 y 43 34 & 43			
			Unity	D25	X25	X40
Slip Resistance* Resistencia al deslizamiento* Rutschsicherheit*		TRRL EN 13845 EN 13893 DIN 51130	≥ 36 ESf DS R10	≥ 36 ESf DS R10	≥ 36 ESf DS R11	≥ 36 ESf DS R10
Thickness Espesor Total Gesamtdicke		EN 428	2.5 mm	2.5 mm	2.5 mm	4 mm
Wear Layer Capa de uso Nutzschrift		EN 429	2.5 mm	2.5 mm	2.5 mm	4 mm
Weight Peso Flächengewicht		EN 430	3.1 kg/m <sup>2</sup>	2.9 kg/m <sup>2</sup>	2.9 kg/m <sup>2</sup>	4.5 kg/m <sup>2</sup>
Roll Dimensions Dimensiones del rollo Rollenabmessungen		EN 426	2 m x 20 m = 40 m <sup>2</sup>	2 m x 20 m = 40 m <sup>2</sup>	2 m x 20 m = 40 m <sup>2</sup>	2 m x 12.5 m = 25 m <sup>2</sup>
Sound Insulation Aislamiento acústico Trittschal		ISO 140-8	7 dB	7 dB	5 dB	7 dB
Flexibility Flexibilidad Flexibilität		EN 435	Pass Conforme bestanden			
Light Fastness Resistencia a la luz Lichtechtheit		EN 20105-B02	≥6			
Wear Resistance Abrasión Verschleißverhalten		EN 13845	≤10% particles lost over 50000 Cycles ≤10% de las partículas perdidas en 50.000 ciclos ≤10% Partikel werden über 50000 Umdrehungen verloren			
Indentation Punzonamiento Resteindruck		EN 433	≤ 0.10mm			
Fire Performance Reacción al fuego Brandverhalten		EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class Bfl-s1 ≥8kW/m <sup>2</sup> Pass Clase Bfl-s1 ≥8kW/m <sup>2</sup> Conforme Klasse Bfl-s1 ≥8kW/m <sup>2</sup> bestanden			
Chemical Resistance** Resistencia a los productos químicos** Chemikalieneinwirkung**		EN 423	Good Buena beständig			
Castor Chair Abrasion Huellas de sillas de ruedas Stuhlrollenbeanspruchung		EN 425	Pass Conforme geeignet			
Under floor heating Calefacción por el suelo Fußbodenheizung		EN 12667	Suitable Apto geeignet			
Electrical Behaviours Características eléctricas Elektrisches Verhalten		EN 1815	≤ 2kV Antistatic ≤ 2kV Antiestáticas ≤ 2kV antistatisch			

\* We recommend the use of Altro Aquarius™ for combined shoe and barefoot use in wet and dry areas such as hospital bathrooms and Altro Marine™ 20 / T20 for barefoot use in wet areas such as swimming pool surrounds.

\*\* Caution Ketone/Aromatic Solvents. Please contact Altro for further technical advice regarding staining and chemical resistance.

### Installation and Maintenance

All installations in accordance with Altro safety flooring instructions and Local Codes of Practice. Please refer to Altro Cleaning Card for maintenance advice. Failure to install and maintain Altro flooring in accordance with installation instructions can affect its performance and slip resistance. Floors should be protected from other trades and thoroughly cleaned before handover.

These products have never contained phthalate plasticisers.

All information is correct at the time of print and is subject to change without prior notice.

Visit us at [www.altro.com](http://www.altro.com) for more information and updates.



Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.



For further technical information please visit [www.altro.com](http://www.altro.com)  
 Si desea obtener más información técnica, visite [www.altroscandess.com](http://www.altroscandess.com)  
 Weitere technische Informationen finden Sie auf unserer Website [www.altro.de](http://www.altro.de)

Distributor label

EN13845