



# Epok Tread 9020 Tile System

Surface-tolerant anti-skid tile system

## The technology

Epok Tread Systems were developed on the basis of revolutionary oil-absorbent epoxy technology, are tolerant to damp and degraded surfaces and are compatible with most aged coatings. The Epok Tread 9020 Tile System is independently tested and approved for offshore use. The system is Civil Aviation Authority approved for helidecks. Epok Tread 9020 tiles are supplied in standard finish colors.

## Typical uses


Anti-skid safety flooring suitable for:

- Offshore platform and ship decks
- Escape routes and muster points
- Steel and aluminum helidecks
- Stairways, footbridges and road bridges

## Performance

With minimum service downtime and applied on minimally prepared surfaces, the Epok Tread 9020 Tile System provides a cost-effective anti-skid floor and deck system with superior wear properties and high-performance corrosion protection.

- Revolutionary oil-absorbent epoxy technology (3mg/cm<sup>2</sup>)
- Surface tolerant
- Can be applied to damp surfaces
- Durable and tough
- Inhibits corrosion
- Applicable to a wide range of substrates including steel and concrete
- Labor and time saving
- Fast return to service
- Extensive track record
- Independently tested and approved for offshore use
- Proven performance and 20-year expected lifetime
- Tiles can be cut to shape for awkward areas
- Solvent-free, zero-VOC emissions, environmentally friendly

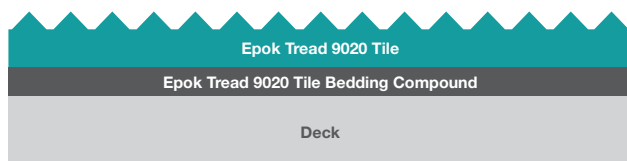

## Components

The Epok Tread 9020 Tile System is a combination of Epok Tread 9020 Tile Bedding Compound and Epok Tread 9020 tiles.



One unit Epok Tread 9020 Tile System consists of:

- Three component tile bedding compound (3.7 liters)
- Ten Epok Tread 9020 Tiles

Coverage = 2.5 m<sup>2</sup>/unit = approx. 11.4 kg/m<sup>2</sup>  
Tile profiles are 1-3mm aggregate

## Surface preparation

Manual preparation ISO 8501-1:St 2 or  
Abrasive blast cleaning ISO 8501-1:Sa 2 or Sa 2 ½.



**For detailed instructions refer to the Epok Tread 9020 Tile System Application Guide**

## Standard Epok Tread 9020 tile colors


- Neutral (clear)
- BS 18B25 Dark Admiralty Grey
- BS 14C39 Middle Green
- Additional colors supplied upon request

## Overcoating

For repair or additional color marking, the Epok Tread 9020 Tile System can be overcoated with a suitably approved finish, including the SIGMADUR™ range and the AMERCOAT® 450 range.

## Return to service at 20°C (after tile application)

Type of traffic	Time
Pedestrian	1 hour
Medium	2 hours
Heavy	4 hours

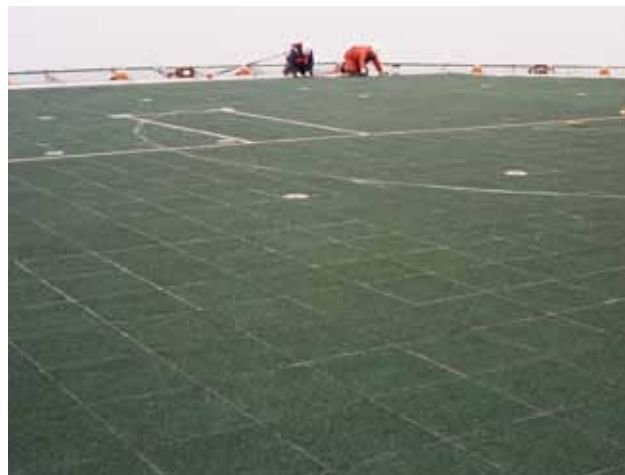

## Epok Tread track record

Providing underfoot anti-skid safety on helidecks, muster points, escape routes and walkways.

Centrica	BP
British Gas	Conoco Phillips
Talisman Tartan	Total
Occidental	Amoco
Shell	Chevron
Texaco	