
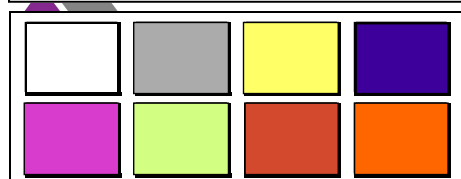


## Technical Specification

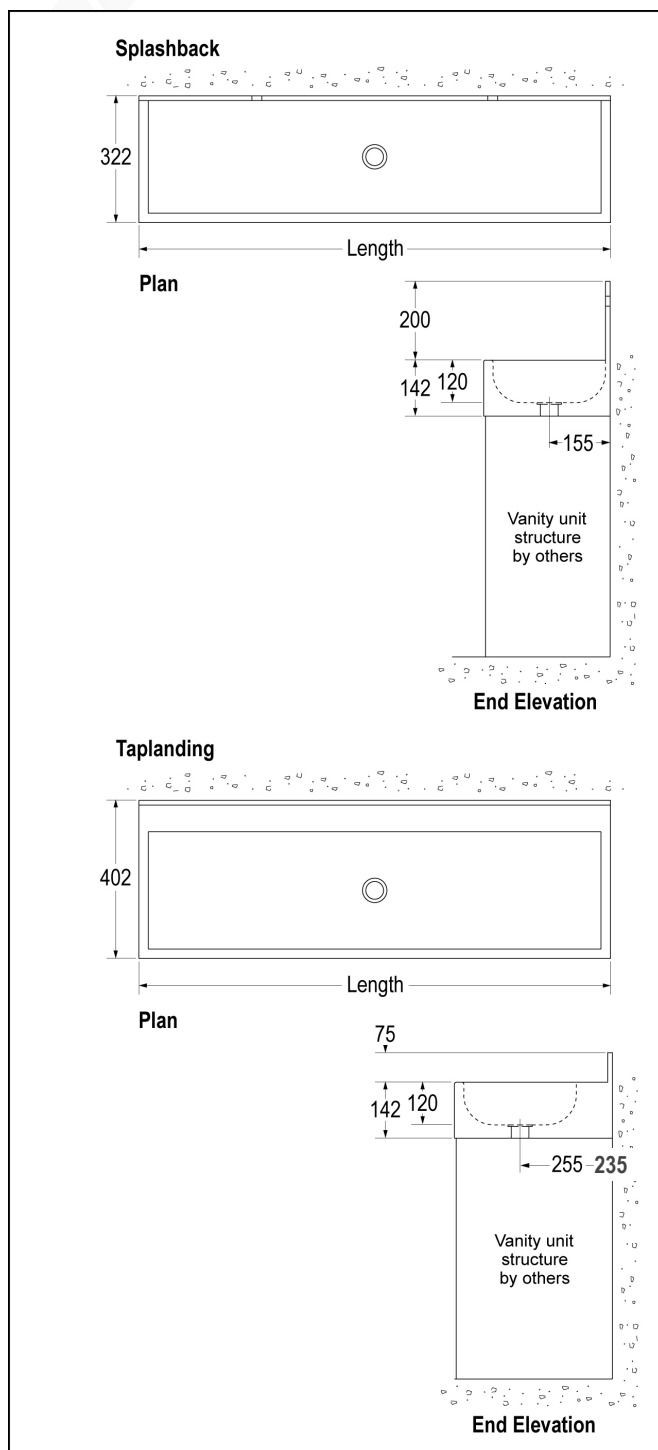

Standard colours shown are indicative and a guide only as colour rendition varies between screens and printers

### Length

The solid surface wash trough is available in five standard lengths; 600 mm, 1200 mm, 1500 mm, 1800 mm and 2400 mm. Alternatively any other length up to 2400 mm can be supplied

### Waste Outlet

The solid surface wash trough is supplied as standard with a 38 mm (1½in) BSP unslotted flush grated waste fitting positioned centrally.

### Tap Hole Position

The solid surface wash trough is produced with either one central or two tap holes per user.

### Tap Hole Sizes

The standard tap hole sizes are 22 mm, 28 mm, 30 mm and 35 mm diameter.

### Tap Options

All solid surface wash troughs are available with a selection of mechanical and "no-touch" sensor operated taps and spouts. Please refer to our web site for suitable products.

### Soap Dispensing

All solid surface wash troughs are available with a selection of wall or deck mounted mechanical and "no-touch" sensor operated liquid soap dispensers. Please refer to our web site for suitable products.

### Product Code Selection for Order or Quotation

#### 1. Base Product Code

- 383-solid surface deck mounted wash trough, splashback
- 384-solid surface deck mounted wash trough, taplanding

#### 2. Length

- 600
- 1200
- 1500
- 1800
- 2400
- Other (please specify)

#### 3. Outlet (as facing)

- C-central

#### 4. Tap Hole Size

- 22 mm dia
- 30 mm dia
- 28 mm dia
- 35 mm dia

#### 5. Colour Options (standard colours – others to order)

- Trough**
- White
- Grey Marta
- Yellow
- Blue
- Pink
- Green
- Red
- Orange

(Other colours please specify \_\_\_\_\_)

As improvements in the design and performance of Acorn Powell Limited products is continuous specifications may be subject to change without notification