

Celcon Blocks – Coursing Units



Coursing units are produced from the same material and are suitable for all the same applications as conventional size Celcon Blocks, allowing consistency within the building fabric.



They are suitable for use both externally and internally in loadbearing and non-loadbearing situations. Available to suit blocks with which they are supplied.

Loadbearing walls should not be constructed of Coursing Units as the only masonry unit.

Applications

- Protect against cold bridging
- Infill above doors and windows
- Coursing at floor and ceiling level
- Making up between joists



H+H UK will always endeavour to reflect our product range and technical information as accurately as possible. We may however, need to update both from time to time. Please check with either our Sales or Technical departments to obtain the latest information prior to specification and purchase.

Celcon Blocks – Coursing Units

Face size	Coursing Units 215mm x 65mm	
Unit Thickness (mm)	100	140
Standard Coursing Unit Weight (kg) [†]	1.1	1.5
High Strength Coursing Unit Weight (kg) [†]	1.2	1.7
Super Strength Coursing Unit Weight (kg) [†]	1.2	1.7


[†] Blocks weights at typical moisture content when laid. (Some manufacturers may quote weights which have not allowed for this.)

All shaded areas indicate that the product is a stock item at all factories, other sizes can be made to order subject to minimum quantities.

	Standard Grade	High Strength Grade	Super Strength Grade
Compressive Strength	3.6N/mm ²	7.3N/mm ²	8.7N/mm ²

Pack information	215mm x 65mm	
Block Thickness (mm) = T	100	140
Coverage per pack (m ²) – 10mm joint	10.0	5.0
Coverage per pack (m ²) – 2mm joint	8.6	4.3
Pack height (mm) = H	800	560
Number of units per pack	600	300
Pack Weight – Standard Grade (kg)*	646	453
Pack Weight – High Strength/Super Strength (kg)*	742	519

* Pack weight excludes pallet.

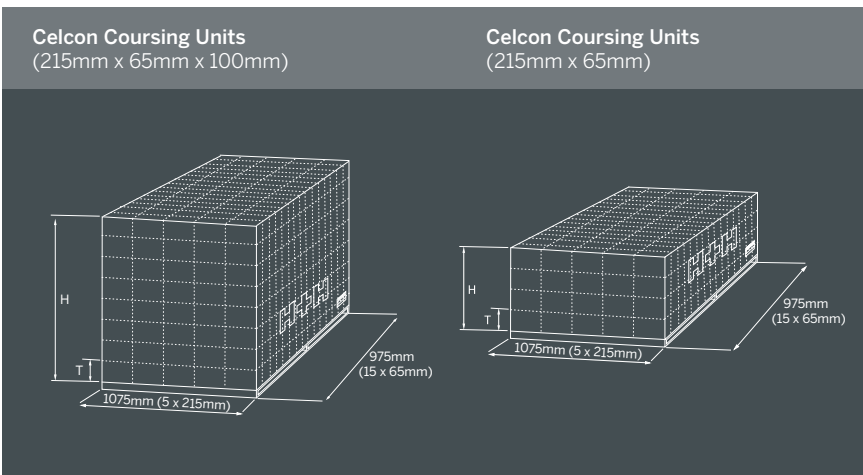

For further information and to check our most up-to-date product range please visit our website www.hhcelcon.co.uk or contact the following departments:

Sales

For sales enquiries or to find your local stockist please contact
 Tel: 01732 886444
 Fax: 01732 887013

Technical

For technical enquiries please contact
 Tel: 01732 880580
 Fax: 01732 887013
 Email: technical.services@hhcelcon.co.uk