

# PVC ACCESSORIES (SIT-ON, SET-IN & FLAT SKIRTINGS / COVE FORMERS & CAPPING STRIPS)

## Product Description

PVC Flooring Accessories are used widely in commercial and public buildings. They are designed to create a neat and hygienic finish to floor covering at wall joints, which are easy to maintain and clean. For technical information please email [technical@quantum-ps.co.uk](mailto:technical@quantum-ps.co.uk).

## Dimensions

Profile lengths vary depending on profile, for profiles lengths please visit [www.quantumflooring.co.uk](http://www.quantumflooring.co.uk).

## Skirtings Colour Range

Inc. Light Reflectance Value (LRV)

6	Black	29	Cloud Grey
7	Dark Brown	31	Caramel
11	Regency	45	Platinum Grey
11	Graphite	51	Ivory
15	Charcoal	81	White
25	Boulder		

## Capping Strips Colour Range

Inc. Light Reflectance Value (LRV)

6	Black	29	Cloud Grey
7	Dark Brown	31	Caramel
15	Charcoal	81	White

## Coving & Floormitre Colour Range

Inc. Light Reflectance Value (LRV)


6	Black
---	-------

### Note:


Can't find the colour you are looking for?  
We offer a colour matching service (subject to volumes) call our customer care team on **+44 (0) 161 627 4222** to find out more.

## Range

### Floormitres - Internal & External




CCFM1




CCFM2


### Sit-on Skirtings

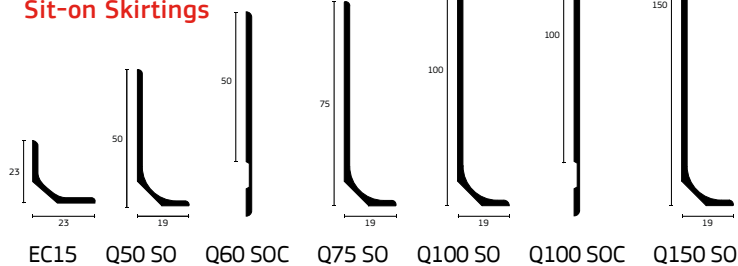


### Set-in Skirtings

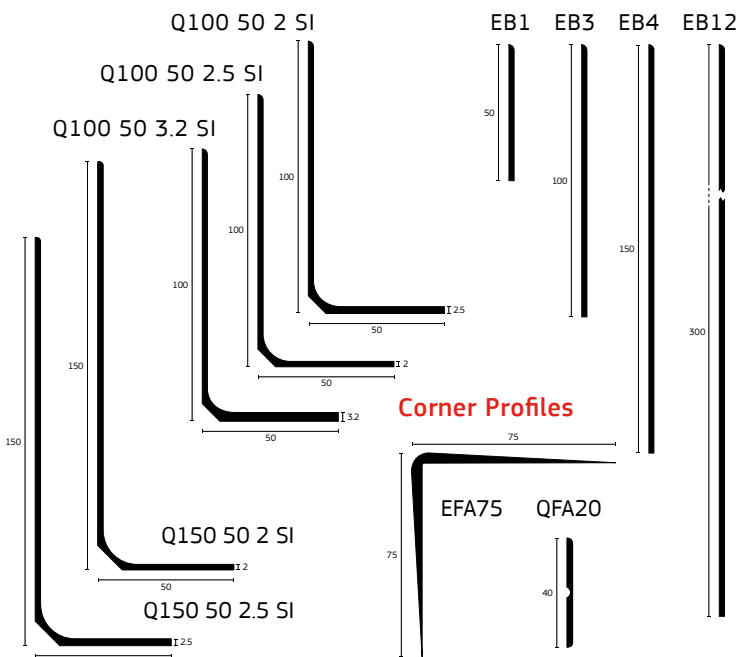


### Flat Skirtings

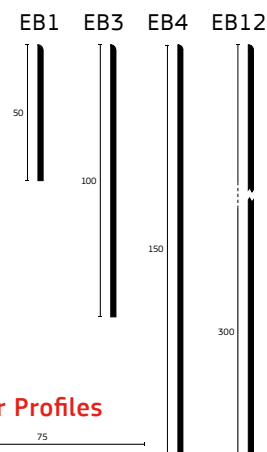

### Corner Profiles



### Cove Formers & Capping Strips

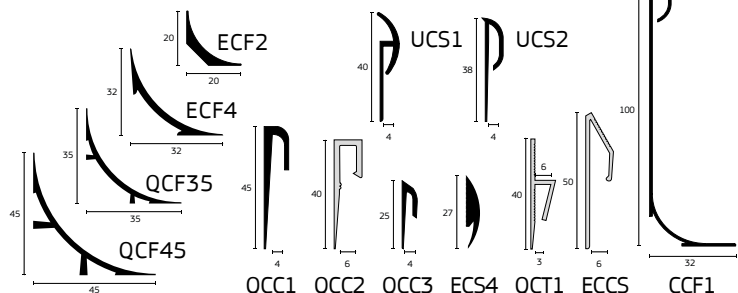

## Technical Data

### Product Composition

#### Polyvinylchloride (PVC / UPVC)

- (Plasticisers)
- Inert fillers
- Flame retardants

### Physical and Chemical Properties

- Form:** solid / rigid
- Colour:** various
- Odour:** slight odour
- Solubility:** insoluble in water
- Decomposition:** will decompose at temperatures above 150°C

## Safety Data

Please review 'Safety Data Sheet – PVC' or 'Safety Data Sheet – CC'.

## Maintenance

**Note: Do not use solvents**

### Flexible Products (PVC)

1. Skirtings should first be cleaned with a mild detergent solution using a sponge or damp cloth but avoid excessive moisture.
2. Rinse with clean water being careful not to over wet.
3. Dry off and buff up with lint free cloth.

### Rigid Products (UPVC)

1. Clean with a mild detergent solution.
2. Dry off if necessary with lint free cloth.

## Allied Products

Internal Floormitre -

[View Internal Floormitre on the Quantum Flooring website](#)

External Floormitre -

[View External Floormitre on the Quantum Flooring website](#)

## Installation

All PVC products should be applied with a contact adhesive from a leading supplier. Please ensure the surfaces are clean, dry, smooth and free from grease or dust. It is always advisable that the walls/floors are primed first. Follow the instructions for the application of the adhesive very carefully.

Allow the PVC product to acclimatise to room temperature prior to installation.

### Sit-on Skirtings

Apply the adhesive to the wall and upright back of the sit-on skirting only. These skirtings are applied after the floorcovering is laid, as the foot of the skirting is not glued to, but sits on top of the floorcovering beneath.

### Set-in Skirtings

Apply the adhesive to the wall/floor and to the back and base of the skirting. These skirtings are fitted before the floorcovering is laid so that they can be sealed or seam welded flush with it.

### Flat Skirtings

Apply the adhesive to the wall and back of the flat skirting. Flat skirtings can be applied before or after the floorcovering is laid. Suitable for use as buffer strips, wall protection, plinth and stage bases, stair stringers etc.

### Cove Former & Capping Strips

Apply the adhesive to the wall/ floor and the back and base of the cover former. Carefully mark the positioning of the capping strip and apply the adhesive to the wall and the back of the capping strip.

## Warranty

Quantum Flooring Solutions warrants that all Quantum Flooring products produced and despatched from its works in Oldham, Lancashire are free from material defects and are fit for purpose when fitted strictly in accordance with the manufacturer's instructions.

This warranty is applicable to Quantum Flooring products that have been correctly specified, installed and maintained. Company leaflets, brochures and data sheets (hard copy and online) are available, and these give details of all necessary and relevant requirements.