



**Safetell**

SAFETY SECURITY PROTECTION

# CounterShield



# CounterShield

## Introduction

CounterShield is an anti-physical attack sash style security window, designed to facilitate open counter trading, and staff protection.

The ability to set the electrically driven moving screen at any position between fully open and fully closed allows staff protection to be varied in the face of changing risk, or for a position to be temporarily closed as required.

The moving screen can be reactively closed in the event of a threat or attack. Where multiple CounterShields are installed the system can be supplied so that pressing any reactive closure button closes all CounterShields.

CounterShield incorporates a safety device across the leading edge of the moving screen that prevents the possibility of being hit by the moving screen.

Incorporating steel, glass, and polycarbonate anti-physical attack materials, as a complete assembly CounterShield provides resistance to BSEN356 P3A.

## Safetell Offers

- Tailored sizes
- Customer choice of powder coated colour
- Nationwide installation and project management

## Additional Safetell Capability

- Complete secure-line solutions, including attack resistant glazing, counterwork, doors, fire exit doors, cash drawers, cashier safes, and other security equipment
- Access control systems (including nationwide repair and maintenance services)
- CCTV systems (including nationwide repair and maintenance services)

## FEATURES


- Open counter trading
- Anti-physical attack protection
- The moving screen can be set at any position
- Allows staff to control their level of protection
- Reactive closure protection when needed
- Tailored sizes
- Can be fitted to existing counterwork
- Nationwide installation and support
- Complete secure-line solutions

## APPLICATIONS

- Local Authority service desks
- Hospitals
- Healthcare centres
- Government
- Police
- Schools

## DIMENSIONS

- Standard Overall Widths 900mm or 1200mm
- Bespoke Min/Max Widths 750-1200mm (Fast Reactive Closure)
- Bespoke Min/Max Widths 1201mm-2000mm (Slower Reactive Closure)
- Standard Heights 1300, 1500, 1700mm
- Bespoke Min/Max Heights 1200-2000mm
- Electrical Power 240v AC 5A

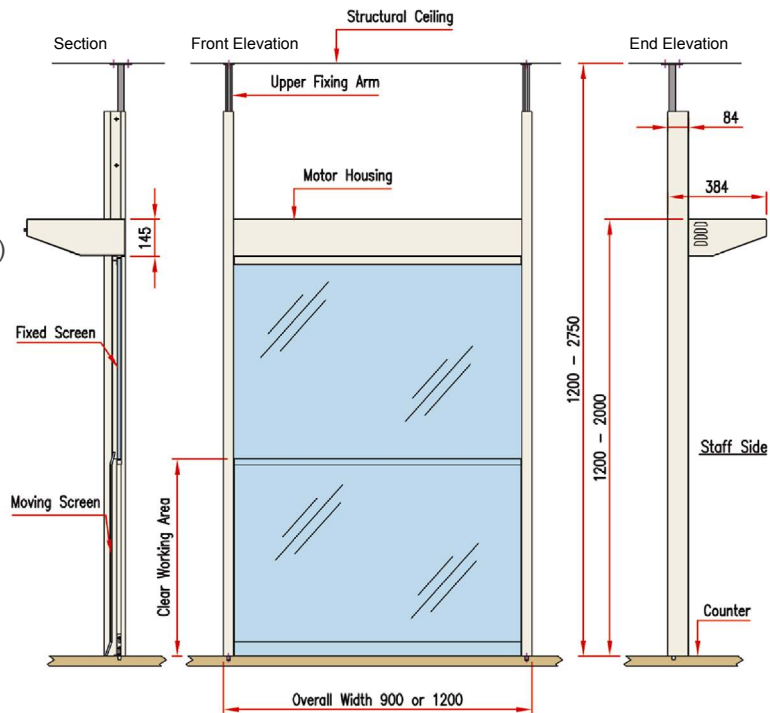

Tel: 01322 22 32 33

Email: sales@safetell.co.uk Web: www.safetell.co.uk

Safetell, 46 Fawkes Avenue, Dartford, Kent DA1 1JQ

VER: 25/03/2015



**Safetell**

SAFETY SECURITY PROTECTION