


# series 9 bullet resisting doors

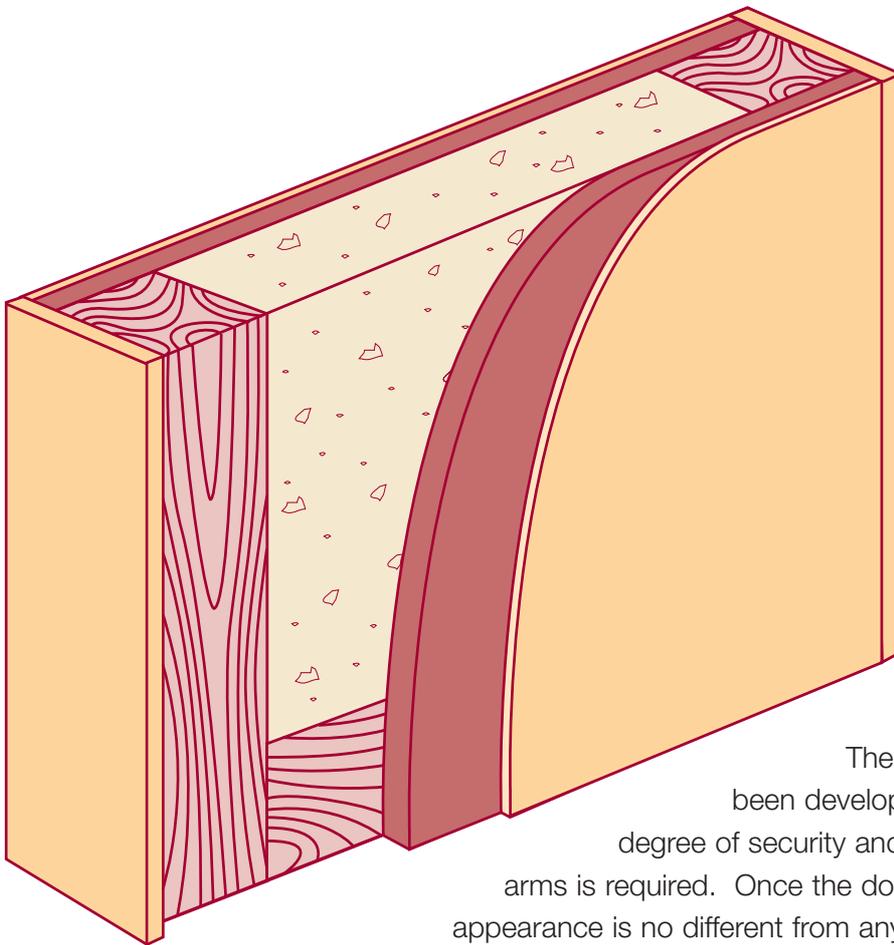


The Noberne Bullet Resisting door has been developed for use in areas where a high degree of security and resistance to the discharge of fire arms is required. Once the door is fixed in position its appearance is no different from any other flush door. The door has been tested in accordance with British Standard 5051 Part 1 1973 with the following successful results.

### **G1 Standard**

Three shots were fired from a 357 Magnum pistol at a range of 3 metres in a triangular pattern and all shots were successfully held.

### **G2 standard**

Four shots were fired from a 44 Magnum pistol at a range of 3 metres in a triangular pattern and all the shots were successfully held. Both the above tests were carried out on the same door panel which was 595mm x 595mm.


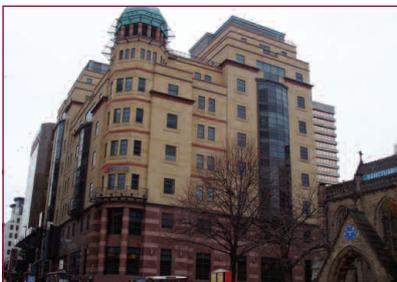


*"A luxury city centre hotel like the Radisson SAS Leeds demands luxury doors, which is exactly what Noberne provided. As usual Noberne's delivery and scheduling were accurate and reliable and their level of service was first class."*

GARY ABRAHAMS, MANAGING DIRECTOR, ABRAHAMS & CARLISLE

Illustrations are not to scale

6mm HW edge lips

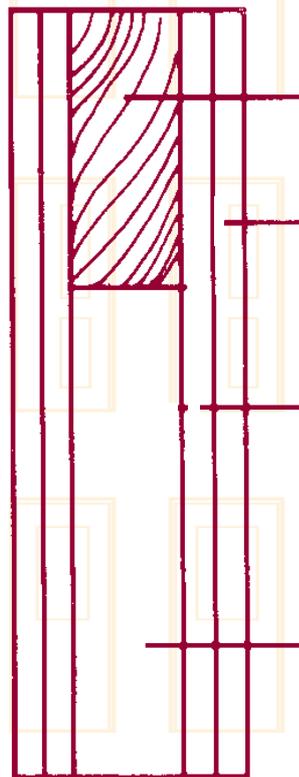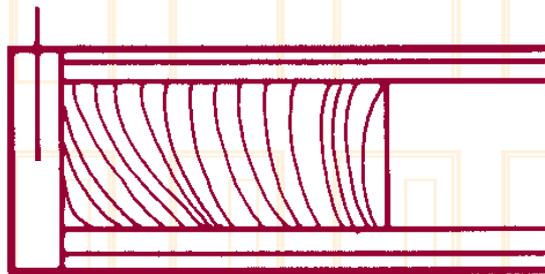

63 x 26mm  
stiles & rails

4mm facings

6.5mm anti-vandal &  
bullet resistant laminate

26mm high  
density flaxboard

### Specification

Stiles, top and bottom rails of kiln dried softwood 10-12% moisture content; core of high density flaxboard with 6.5mm anti-vandal and bullet resisting laminate bonded to each face of the flaxboard and framing. Doors faced with 4mm internal or external grade plywood or chipboard as required. Kiln dried hardwood lippings fixed by none melt glueing to both long edges; lippings to top and bottom as required.

Thickness 47mm.

TOLERANCE  $\pm 2$ mm.

Average weight 55kg/m<sup>2</sup>.

### Locking Systems

Noberne Series 9 doors can be factory fitted with most of the built-in multiple locking systems that are currently available.

Alternatively doors can be supplied ready to receive surface mounted locking systems.

We should be pleased to discuss your particular requirement.

### Acoustics

These designs are capable of 29dB Rw acoustic performance on single leaf, single action configuration with appropriate acoustic seals.

### Availability

Noberne Bullet resisting doors are available in a large range of sizes and finishes to suit customer requirements.

### Noberne Doors Limited

Lupton Street, Hunslet  
Leeds LS10 2QP

**T** 0113 277 8577

**F** 0113 277 2049

**E** sales@nobervedoors.co.uk  
[www.nobervedoors.co.uk](http://www.nobervedoors.co.uk)

