




# Mitre Top Bollard 1000mm Above Ground 76mm - 114mm Diameter Galvanised Steel

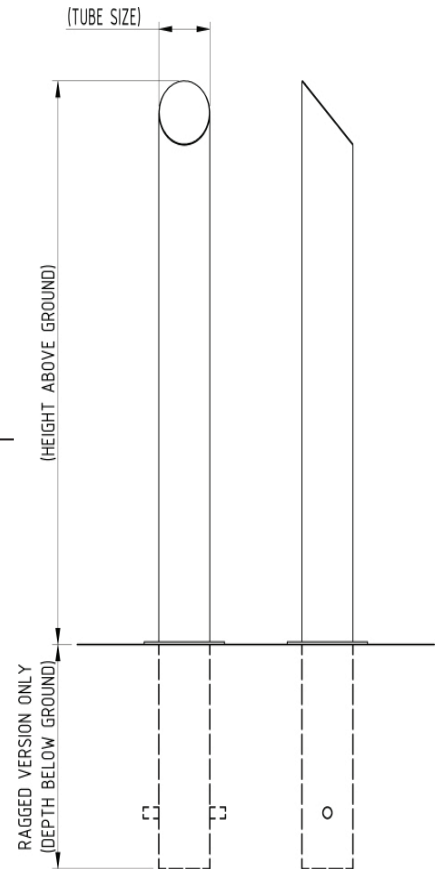

AUTOPA's range of Mitre Top Round Stainless Steel Bollards are a simple and elegant way of controlling vehicle parking and access.

Mitre Top Bollards are the preferred choice for prestigious sites as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

Manufactured from galvanised mild steel, it is designed to look good on even the busiest sites for many years. Supplied ragged as standard, flanged and colour coated versions are available upon request (please state BS/RAL number at time of order).

Part Number	Description	Weight (kg)
138 121 215	76mm, Concrete In	7.9kg
138 121 227	76mm, Bolt Down	6.3kg
138 121 295	90mm, Concrete In	9.3kg
138 121 297	90mm, Bolt Down	7.3kg
138 121 315	101mm, Concrete In	10.4kg
138 121 317	101mm, Bolt Down	8.7kg
138 121 415	114mm, Concrete In	11.9kg
138 121 416	114mm, Bolt Down	9.7kg

## Product details

- 1000mm tall
- Concrete In bollards 400mm below ground
- Re-inforcing cores available
- 3mm Wall Thickness
- Reflective bands available
- Supplied with 45 degree welded steel cap

## Installation & use

Concrete In bollards require an excavated hole (no less than 400mm<sup>3</sup>) for installation. Bolt down Plain Bollards require bolting down to a suitable concrete surface (no less than 400mm<sup>3</sup>).

48mm - 114mm three M12 bolts, 139mm - 193mm three M16 bolts.

AUTOPA recommends that bollards are placed no further than 1,200mm apart to ensure that no vehicle may pass between them. This product is guaranteed for 12 months (if installed and used correctly).



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP

