




AUTOPA

Mitre Top Bollard 1000mm Above Ground 127mm - 193mm Diameter Galvanised Steel

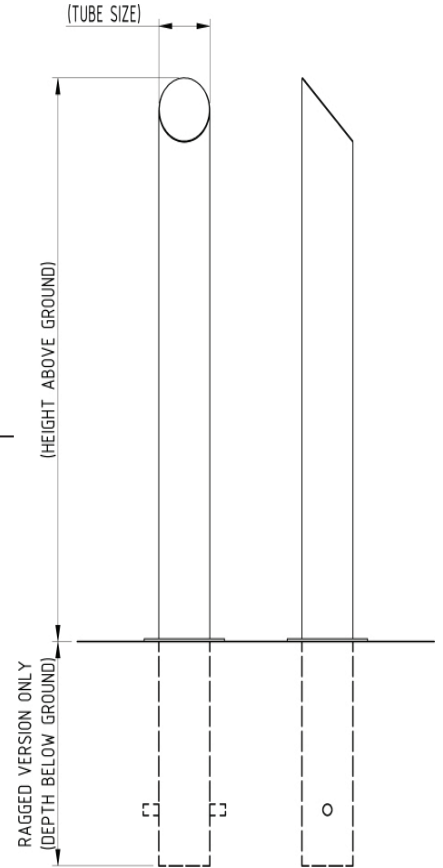

AUTOPA's range of Mitre Top Round Stainless Steel Bollards are a simple and elegant way of controlling vehicle parking and access.

Mitre Top Bollards are the preferred choice for prestigious sites as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

Manufactured from galvanised mild steel, it is designed to look good on even the busiest sites for many years. Supplied ragged as standard, flanged and colour coated versions are available upon request (please state BS/RAL number at time of order).

<u>Part Number</u>	<u>Description</u>	<u>Weight (kg)</u>
138 121 515	127mm, Concrete in	21.4kg
138 121 516	127mm, Bolt down	19.2kg
138 121 615	139mm, Concrete in	23.5kg
138 121 616	139mm, Bolt down	21.5kg
138 121 685	152mm, Concrete in	25.8kg
138 121 686	152mm, Bolt down	23.6kg
138 121 715	168mm, Concrete in	28.6kg
138 121 716	168mm, Bolt down	26.4kg
138 121 815	193mm, Concrete in	33.0kg
138 121 816	193mm, Bolt down	28.2kg

Product details

- 1000mm tall
- Concrete In bollards 400mm below ground
- Re-inforcing cores available
- 5mm Wall Thickness
- Reflective bands available
- Supplied with 45 degree welded steel cap

Installation & use

Concrete In bollards require an excavated hole (no less than 400mm³) for installation.
Bolt down Plain Bollards require bolting down to a suitable concrete surface (no less then 400mm³).

48mm - 114mm three M12 bolts, 127mm - 193mm three M16 bolts.

AUTOPA recommends that bollards are placed no further than 1,200mm apart to ensure that no vehicle may pass between them.
This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

