


DYNAMICROLL® CB 230

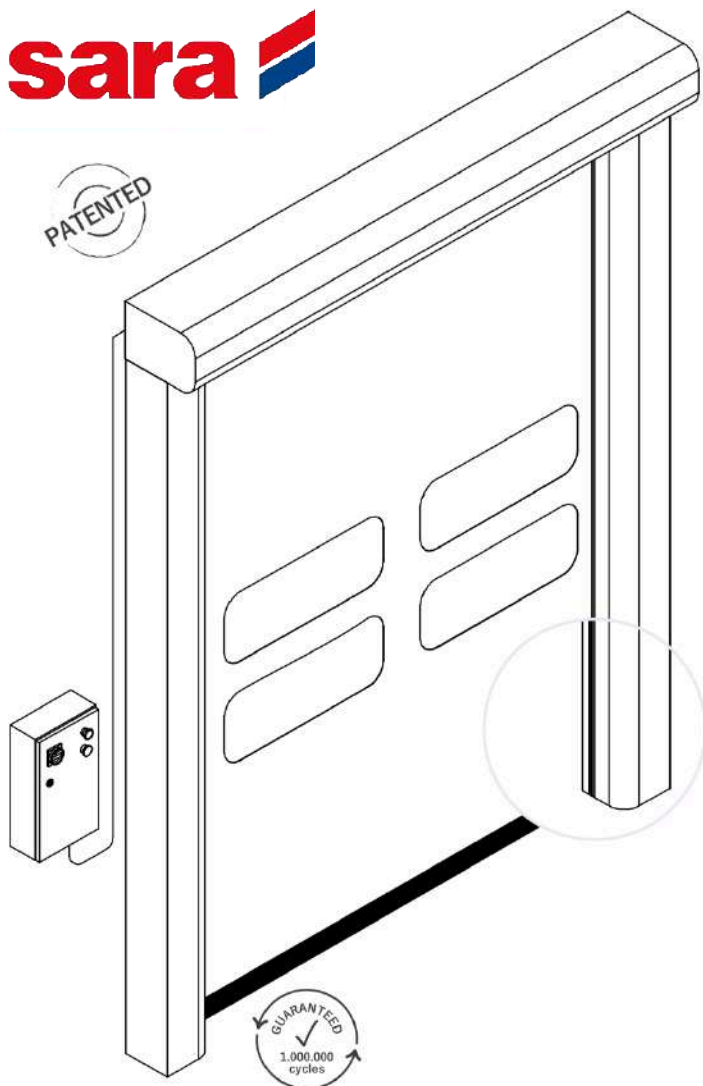

DESCRIPTION

DynamicRoll® **CB 230** is a self-repairing roll up door designed to separate overpressured sterile environments, thanks to its sealing ensures controlled pressure leakage allowing the ventilation systems and air purification to operate correctly.

Equipped with counterweight the door can manage the opening even in case of power failure. Thanks to its special compact frame and to the special sliding system door has a low permeability to be suited for controlled environments.

Thanks to the special sliding system, that lets the curtain, without rigid elements inside it, come out from the guides, to protect itself in case of any impact during the operation of the door and allows it to reinsert after one cycle.


DynamicRoll® name assure the safety of staff, thanks to its curtain without rigid horizontal elements.

ADVANTAGES

- ✓ Self-repairing
- ✓ Sealing
- ✓ Noiseless
- ✓ No rigid elements inside the curtain for 100% safety
- ✓ Plug & play (easy to install)
- ✓ Low maintenance
- ✓ Energy savings
- ✓ Emergency opening with automatic counterweight

APPLICATION


- Door ideal for:**
- ✓ Pharmaceutical
 - ✓ Food processes
 - ✓ Pressure controlled environments
 - ✓ Clean rooms

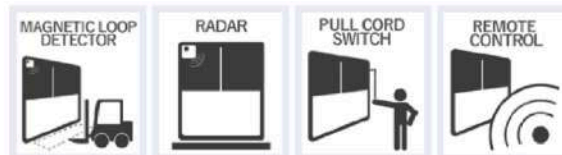

EN12421/CE

Standard	Ref.	Test acc.	Results
Water permeability	EN 12425	EN 12489	Class 1
Wind load	EN 12424	EN 12444	Class 2
Wind permeability	EN 12426	EN 12427	Class 2
Safe openings	EN 12453	EN 12445	✓
Mechanical resistance	EN 12604	EN 12605	✓
Unintended movements	EN 12604	EN 12605	✓
Thermal transmittance	EN 12428	EN 12428	6,02 W/m²K
Performance (cycles)	EN 12604	EN 12605	1.000.000


VALUES CAN CHANGE DEPENDING ON DOOR DIMENSIONS




FEATURES	
Maximum dimensions	W 4500 mm x H 4500 mm
Speed	Max opening speed up to 2,5 m/s
	Closing speed 0,8 m/s.
Wind resistance	Class 2
Structure	Self-supporting
Frame / motor cover hood	Standard: Galvanized Steel
	Optional: Powder coated steel Stainless Steel 441/ 316
Curtain	Standard: PVC curtain 1300 gr/m ² , 6 W/m ² K
	Optional: Insulated 7 mm, 3,3 W/m ² k Translucent 35/40% FDA (white) Antistatic
Sliding system	Patented sliding system with high density Polyethylene self-lubricant equipped of sliding zipper directly on curtain.
Control panel	Standard: Powder coated Steel box IP54 (300 x 500 x 150 mm)
	Optional: Stainless Steel PVC box IP65 (300 x 400 x 150 mm)
	Inverter system 50/60 Hz with absolute encoder
	Power supply 1-ph, 230V max 16A
	Power supply 3-ph, 400V max 10A
	Power supply 3-ph, 230V max 16A
	Start/Stop Button
	2 free contacts (door open/ closed/ alarm)
	Automatic/ Manual Interlocking between 2 doors
	IP rating for motor and control panel IP54
Wiring	Plug and Play system IP65

FEATURES	
Safeties	Standard: Photocells set IP65 Anti-jam sensor reverse WiFi safety edge IP65
	Optional: Multi ray light curtain barrier H2500 IP67
Emergency opening	Standard: Counterweight system Optional: UPS Battery
Advising operative temperature	Operating till - 10° C * with heating kit added - Not apt to be installed in negative/positive temperature
Cycles (EN 12604)	1.000.000 (tested)


SLIDING SYSTEM / SELF-REPAIRING

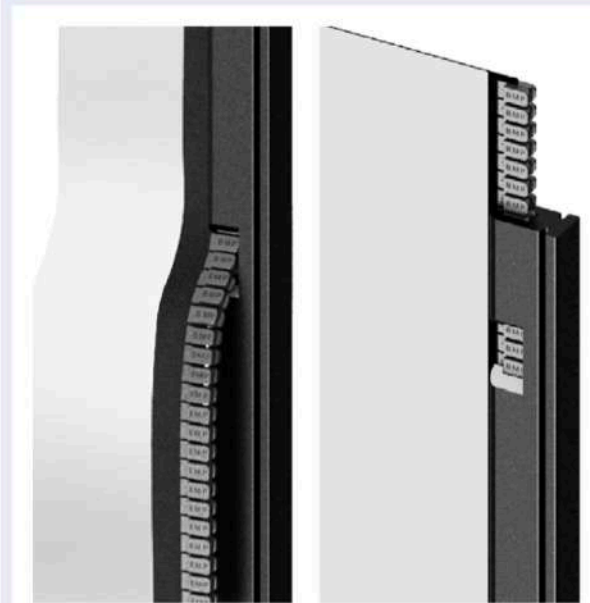

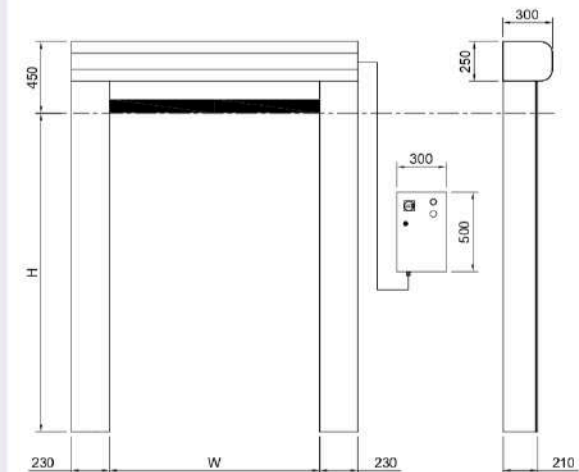


DOOR SPACE REQUIREMENTS



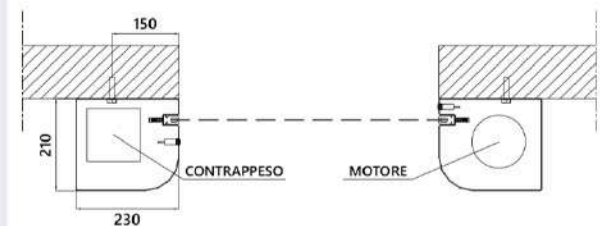





FIXING DETAILS





AVAILABLE COLOURS

Simil RAL 9010 
Simil RAL 1015 
Simil RAL 1003 

Simil RAL 2004 
Simil RAL 3002 
Simil RAL 6026 

Simil RAL 7042 
Simil RAL 7037 
Simil RAL 7035 

Simil RAL 5012 
Simil RAL 5002 

sara 

DynamicRoll® CB 230

Technical data



DynamicRoll® CB 230 is a self-repairing roll up door designed to separate overpressured sterilized environments. Thanks to its special compact frame and to the special sliding system this door has a low permeability.

La porta **DynamicRoll® CB 230** è concepita per separare ambienti sterili in sovrappressione. Dotata di una bassissima permeabilità all'aria grazie al sistema di scorrimento, la porta è estremamente ermetica e compatta e garantisce una perdita di pressione controllata.



TECHNICAL DATA / DATI TECNICI


Maximum door size (W x H) / Dimensioni massime (L x H)	4500 x 4500 mm	Opening speed / Velocità d'apertura	~ 2,5 m/sec.
		Closing speed / Velocità di chiusura	0,8 m/sec.
Wind load / Resistenza al vento:	Class 2 / Classe 2	Applications / Applicazioni	Inside / Interno

PVC CURTAIN / TELO PVC 1,3 mm - 1300 gr/m²

Simil RAL 9010 <input type="checkbox"/>	Simil RAL 2004 <input type="checkbox"/>	Simil RAL 7042 <input type="checkbox"/>	Simil RAL 5012 <input type="checkbox"/>
Simil RAL 1015 <input type="checkbox"/>	Simil RAL 3002 <input type="checkbox"/>	Simil RAL 7037 <input type="checkbox"/>	Simil RAL 5002 <input type="checkbox"/>
Simil RAL 1003 <input type="checkbox"/>	Simil RAL 6026 <input type="checkbox"/>	Simil RAL 7035 <input type="checkbox"/>	

Simil RAL 9010 <input type="checkbox"/>	Simil RAL 3002 <input type="checkbox"/>	Simil RAL 7035 <input type="checkbox"/>	Simil RAL 9005 <input type="checkbox"/>
Simil RAL 1015 <input type="checkbox"/>	Simil RAL 8014 <input type="checkbox"/>	Simil RAL 7037 <input type="checkbox"/>	Simil RAL 5010 <input type="checkbox"/>
Simil RAL 1003 <input type="checkbox"/>	Simil RAL 6026 <input type="checkbox"/>	Simil RAL 7042 <input type="checkbox"/>	Simil RAL 5002 <input type="checkbox"/>
Simil RAL 2004 <input type="checkbox"/>	Simil RAL 6018 <input type="checkbox"/>	Simil RAL 9006 <input type="checkbox"/>	Simil RAL 5012 <input type="checkbox"/>

PVC CURTAIN / TELO PVC 0,9 mm - 900 gr/m²

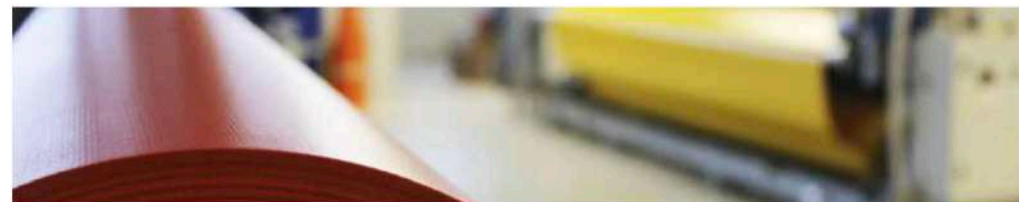

INSULATED CURTAIN / TELO COIBENTATO 3,5 mm - 1300 gr/m²

Simil RAL 9010 <input type="checkbox"/>	Simil RAL 6026 <input type="checkbox"/>	Simil RAL 7035 <input type="checkbox"/>	Simil RAL 5002 <input type="checkbox"/>
---	---	---	---

Simil RAL 9010 <input type="checkbox"/>	Simil RAL 2004 <input type="checkbox"/>	Simil RAL 7035 <input type="checkbox"/>
Simil RAL 1003 <input type="checkbox"/>	Simil RAL 3002 <input type="checkbox"/>	Simil RAL 5002 <input type="checkbox"/>

INSULATED CURTAIN / TELO COIBENTATO 7 mm

Simil RAL 9010

FOOD CURTAIN (FDA) 1,7 mm - 1700 gr/m²



TYPE OF COATING AND FINISH / MATERIALE FINITURA TELO

Coating material / Materiale	PVC	
Top coating / Finitura	Lacquered finishing on both sides / Laccato su entrambi i lati	
Flammability / Resistenza al fuoco	ISO 3795 < 100 mm/min.	
Best weight / Peso totale	900 / 1300 g/m ²	DIN EN ISO 2286-2
Tensile strength / Resistenza alla trazione	4300 / 4000 N/50 mm	DIN EN ISO 1421/V1
Tear strength / Resistenza alla lacerazione	500 / 500 N	DIN 53363
Adhesion / Adesione	20 N/cm	LB 3.04-1
Low temperature resistance / Resistenza al freddo	-40 °C	DIN EN 1876-1
High temperature resistance / Resistenza al caldo	+70 °C	LB 3.15
Color fastness to light / Solidità alla luce	>6 Value / Note	DIN EN ISO 105 B02
Bending strength / Resistenza alle piegature	No creases / Nessuna piega	10.000 x @ DIN 53359 A

TESSUTO DI SUPPORTO / BASE FABRIC

Material / Materiale	DIN ISO 2076	
Yarn count / Titolo del filato	1100	dtex
Weave / Armatura	DIN ISO 2060	
	P2/2	
Notes / Note	Complies with DIN EN 12641-2 / Soddisfa i requisiti DIN EN 12641-2	