


# FINGER PROTECTION DEVICES

## FP600 / FP600X

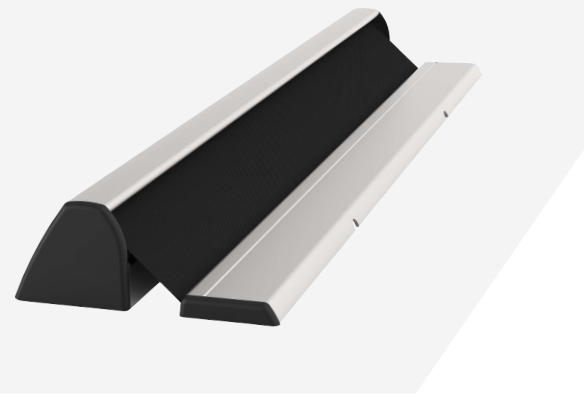


### DESCRIPTION

Suitable for most **single and double action doors** including automatic doors, utilising a roller system to provide effective finger protection; preventing fingers being accidentally trapped on the hinge side of a door.

Strong **fire-retardant fabric** material is kept under constant tension, designed to cover the gap between the door and frame automatically when the door is opened. Has an easy to fit **CLICK** system to prevent tampering and is ideal for use on doors which require high maintenance.



Closed

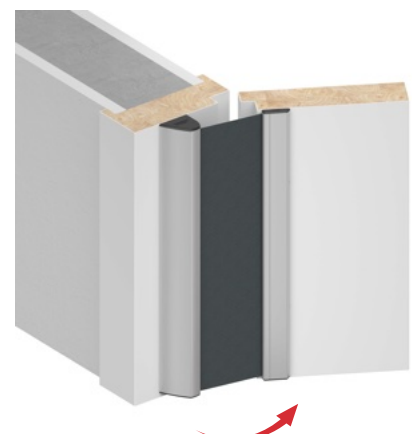

Open

### TECHNICAL DATA

Information	FP600	FP600X
Cycles of operations	200,000	-
Maximum length	2500mm	2500mm
Standard length	1925mm	2015mm
Minimum length	325mm	325mm
Maximum fabric travel	260mm	260mm

Additional Info


- › Made for automatic doors
- › Compliant with EN16005 for automatic doors

**HOUSING FINISH OPTIONS**



Satin Anodised Aluminium (SAA)


**FABRIC COLOUR**




Black

**BESPOKE FINISHES**


Housing RAL colour match available on request (POA). Please contact us to enquire.

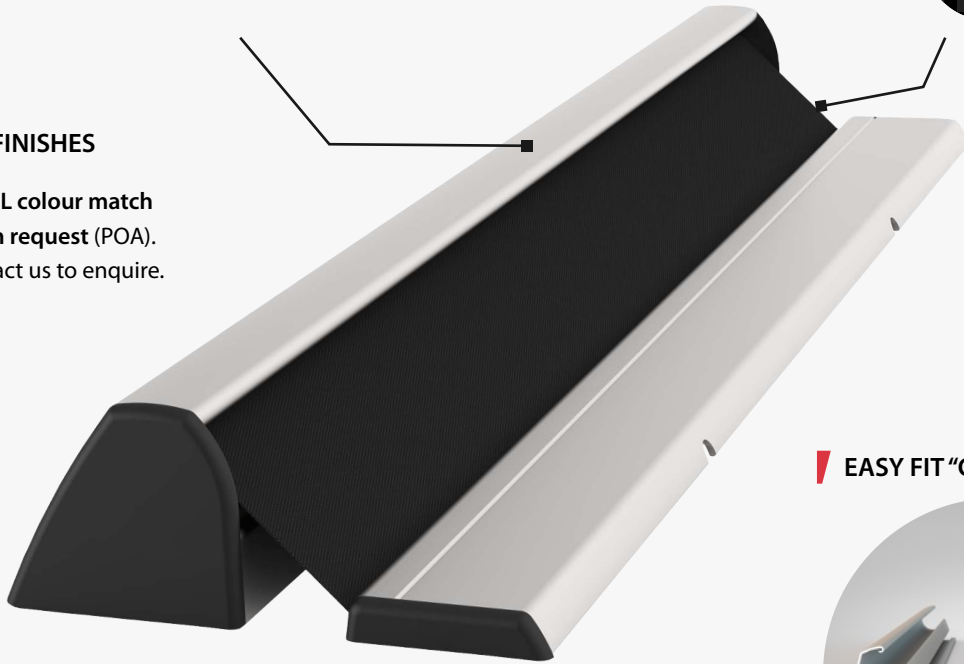

**EASY FIT "CLICK" SYSTEM**

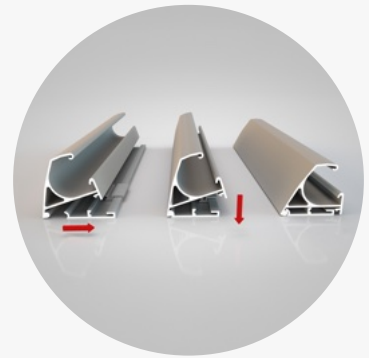

**DIMENSIONS**

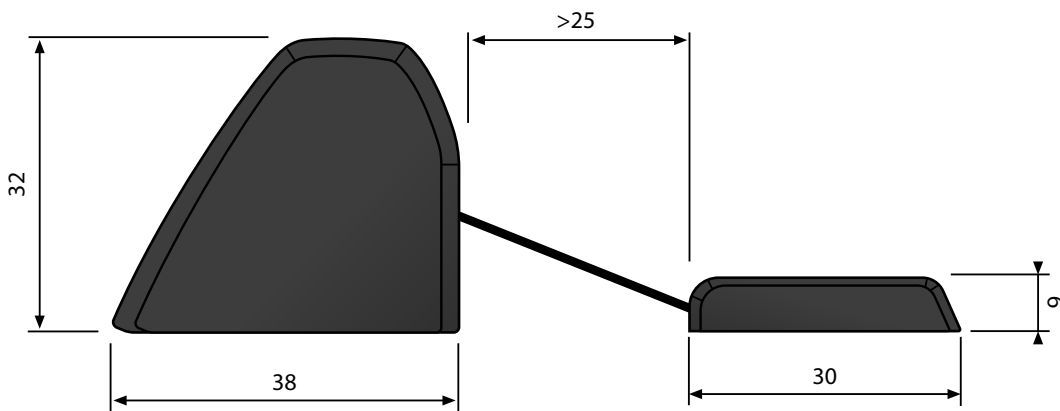

Awarded German Safety Mark and certified to EN16654

